

# BTI-FLATPAR 12

## DESCRIPTION

Robust flat outdoor IP65-projector, equipped with 12pcs 20W RGBAL+UV LEDs and wireless DMX

## FEATURES

- This flat outdoor IP65-projector is equipped with 12pcs **20W RGBAL+UV**
- A powerful workhorse that can be used for different applications!
- Standard 17° beam with 2494lux @ 5m and more than 6750lm!
- The **wireless transceiver** (transmitter + receiver) is 100% compatible with the **W-DMX G4S protocol**.
- Very smooth RGBAL color changes + extra UV for special effects!
- Different working modes for maximum flexibility:
  - **Standalone:** custom colors, color + CCT presets or automatic color changes
  - **Master/slave mode:** the master controls the slaves wirelessly or via XLR cabling, creating wonderful light shows
  - **DMX-controlled:** wired and wireless, 5 modes:
    - 2 channel: Dim + col/cct presets
    - 3 channel: HSV (Hue, Saturation, Value)
    - 7 channel: Separate colors + master
    - 10 channel: Separate colors + master + strobe + col/cct presets + control
    - 12 channel: 10 channel mode + color chases
- Graphic OLED display with the touch keys for smooth operation of the setup menu.
- Silent but effective cooling with 2 fans.
- Sturdy yet elegant mounting bracket:
  - Thanks to its width, the projector can be placed on the floor as an uplighter
  - Easy truss mounting with traditional M10/M12 hanging clamps or quick release omega brackets
- PowerCON TRUE1 compatible Seetronic mains in- and output for easy daisy chaining.
- The standard weatherproof 5-pin XLR in- and output connectors can be easily converted in 3-pin XLR with the optional conversion kit "BT-XLR5TO3 COMBIKIT".



*NOTE: this product has IP65 rating while used for non-permanent outdoor installation and under normal conditions (not exposed to seawater).*

IP65  
☔



## TECHNICAL SPECIFICATIONS

<b>General : Dimensions (cm)</b>	28 (H) x 30.5 x 14.2
<b>General : Weight (kg)</b>	5.3
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	200
<b>General : Color</b>	black
<b>General : Display</b>	OLED
<b>General : Fixation</b>	optional omega bracket
<b>General : IP rating</b>	outdoor
<b>Control : Modes</b>	standalone fixed, standalone automatic, manual, DMX, Master/Slave
<b>Control : Protocol</b>	DMX, Wireless DMX, RDM
<b>Control : programmable</b>	No
<b>Control : upgradable software</b>	Yes
<b>Control : minimum DMX channels</b>	3
<b>Control : maximum DMX channels</b>	12
<b>Light : lamp socket</b>	No
<b>Light : Lux</b>	2494 @5m ( beam 17° )
<b>Light : lumen output max (lm)</b>	6755
<b>Light : lamp</b>	LED
<b>Light : min. color temperature (K)</b>	2500
<b>Light : max. color temperature (K)</b>	6000
<b>Light : CRI</b>	82
<b>Light : colors</b>	UV, RGBAL
<b>Light : mix colors</b>	Yes
<b>Light : zoomrange</b>	16.7°
<b>Light : max. refresh rate (kHz)</b>	20
<b>Connections : input</b>	5 pin XLR, wireless DMX, PowerCon® TRUE1 or compatible
<b>Connections : output</b>	5 pin XLR, wireless DMX, PowerCon® TRUE1 or compatible
<b>Brand</b>	BRITEQ
<b>EANCode</b>	5420025656009
<b>SKU</b>	B05600

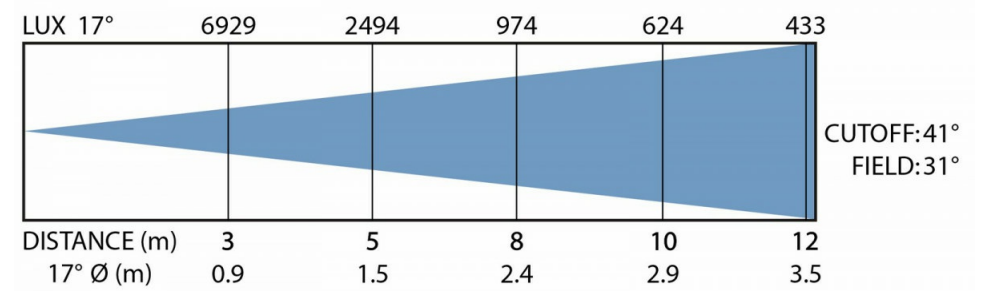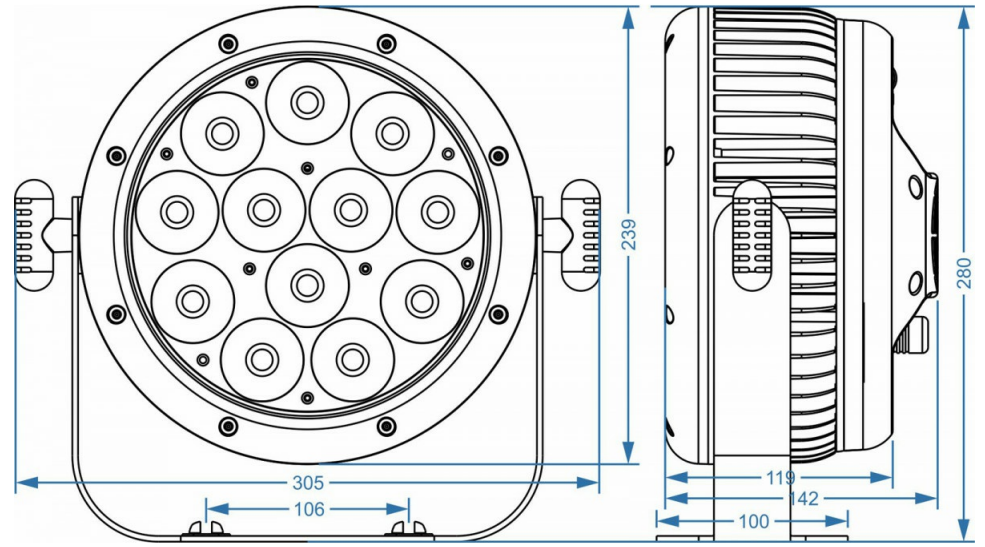

YOUR DEALER



[WWW.BRITEQ-LIGHTING.COM](http://WWW.BRITEQ-LIGHTING.COM) | [WWW.FACEBOOK.COM/BRITEQ](http://WWW.FACEBOOK.COM/BRITEQ)

BEGLEC NV HAS THE RIGHT TO CHANGE PRODUCTS AND SPECIFICATIONS WITH AND WITHOUT NOTICE. MAJOR AS WELL AS MINOR CHANGES CAN BE INVOLVED. THIS LEAFLET CAN CONTAIN ERRORS, THEREFORE WE ADVISE TO CONSULT YOUR LOCAL DEALER TO ENSURE THAT ACTUAL FEATURES AND SPECIFICATIONS MATCH YOUR REQUIREMENTS. COPYRIGHT © 2026 BY BEGLEC NV. ALL RIGHTS RESERVED.