PD-635H/GERMAN

DESCRIPTION

3-phase power distributor with different outputs for maximum flexibility (rental companies!): 12x 16A mains outlet sockets + 2x 16PIN + 2x 19PIN industrial connectors.

FEATURES

- This 3-phase power distributor is designed to improve safety in both mobile, rental and fixed installations.
- Choice of different outputs for maximum flexibility (rental companies!):
 - 12x earthed 16A mains outlet sockets: (4 sockets per phase, 2 different models available
 - **2x 16PIN industrial rectangular connector:** output for use with standard wiring for rental multi-cables
 - 2x 19PIN industrial round connector: output for use with standard wiring for rental multi-cables
- Designed and build to the highest European and international safety standards.
- Oversized internal wiring for increased reliability!
- 63A 4pole circuit breaker protects ALL outputs, including the 63A output to the next unit. In case of emergency all 3 phases AND the neutral are disconnected!
- The 30mA, 4pole residual current circuit breaker prevents electrical shocks
- Phase indicators to easily check if the 3phases are available.
- Accurate digital 3-digit voltmeters per phase
- Accurate digital 3-digit ampere meters per phase
- C16 (16A 1P+N) 2-POLE automatic circuit breakers per 16A output (socket)
- 1,5m long mains input cable (3x 63A, 5wire), equipped with CEE (3P+N+E) 63A inlet plug
- CEE (3P+N+E) outlet socket (3x 63A, 5wire) for bypass
 - 2 different models available:
 - PD-63SH/FRA-BEL: French/Belgian 16A blue mains sockets
 - **PD-63SH/GERMAN:** German 16A blue schukos (CEE 7/4)
- Extremely robust 19"/3U metal housing









www.briteq-lighting.com | https://www.facebook.com/Briteq

SPECIFICATIONS

Brand

EA NCode

General : Application Stage & Rental **General : Dimensions (cm)** 48.2 x 26.6 x 32.6 cm

General: Weight (kg) 11.7

General : Powerinput AC 400V, 50Hz (3P+N+E)

General : Energy LabelNoGeneral : ColorblackGeneral : DisplayLED

General: Fixation 19" rack mountable

General: RU 6U
General: IP rating indoor
Control: manual No
Control: Standalone fixed
Control: programmable No
Control: upgradable software No


Connections : input 5-pole CEE


Connections : outputShuko CEE 7/7, 5-Pole CEE, socapex 19-pin, harting 16-pin


BRITEQ

5420025646482


Discontinued No

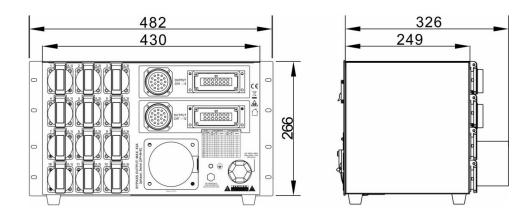





	OUTPUT		19 PIN CONNECTOR		
	CH.	PHASE	PIN	PIN	EARTH
	N°	N°	LIVE	N	
CHANNELS 1 → 6	1	L1	1	2	13
	2	L2	3	4	14
	3	L3	5	6	15
	4	L1	7	8	16
	5	L2	9	10	17
	6	L3	11	12	18
CHANNELS 7 → 12	7	L1	1	2	13
	8	L2	3	4	14
	9	L3	5	6	15
	10	L1	7	8	16
	11	L2	9	10	17
	12	L3	11	12	18







www.briteq-lighting.com | https://www.facebook.com/Briteq