

# BT-THEATRE 60FC (BLACK)

06015

## DESCRIPTION

Stylish 60Watt full color LED theater spot with manual 10° ~ 50° zoom.

## FEATURES

- Stylish 60Watt full color LED theater spot with manual 10° ~ 50° zoom.
- Thanks to its attractive looks this projector is perfect for use in clubs, exhibition booths, rental, ...
- Four-leaf barndoor included
- No more heavy and expensive dimmer packs needed!
- Create any color thanks to the 60W RGBW LED.
- Low noise, temperature controlled, cooling fan
- Extruded black anodized aluminium housing with strong bracket
- LCD-display to select different working modes:
  - Standalone (master) Mode : set dimmer + strobe (if needed)
  - Master/slave mode: connect several projectors together, the first projector controls the others.
  - DMX-controlled: 6 different channel modes for maximum flexibility.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- Lock function to avoid unwanted altering of the settings.
- White balance adjustment to perfectly match the colors of several projectors.
- Default factory settings + user settings can be saved/loaded.
- 3pin DMX in/outputs and fixed 1m power cord with standard mains plug (CEE 7/7)






[www.briteq-lighting.com](http://www.briteq-lighting.com) | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.



SPECIFICATIONS

General : Application	Architectural, Commercial, Theatre
General : Dimensions (cm)	24.1 x 25.1 x 19.5 cm
General : Weight (kg)	3.63
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	62
General : Color	black
General : Display	LCD
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : manual	Yes
Control : Master/Slave	Yes
Control : DMX M/S	No
Control : Standalone	automatic, sound, fixed
Control : Type included remote	-
Control : optional remote	-
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	7
Light : lamp socket	none
Light : Lux	330 lux at 5m and 10°, 77 lux at 5m and 40°
Light : lumen	-
Light : lamp	COB
Light : min. color temperature (K)	-
Light : max. color temperature (K)	-
Light : CRI	-
Light : colors	RGBW
Light : mix colors	Yes
Light : fixed gobos	-
Light : rotating gobos	-
Light : focus	None
Light : zoom	Manual
Light : iris	No
Light : prism ( # facets + rotating y/n )	-
Light : frost filter	No
Light : min. beam angle (°)	10
Light : max. beam angle (°)	50
Light : min. refresh rate (kHz)	1.2
Light : max. refresh rate (kHz)	1.2
Connections : input	3 pin XLR, rdm
Connections : output	3 pin XLR
Brand	BRITEQ
EANCode	5420025660150
Discontinued	No

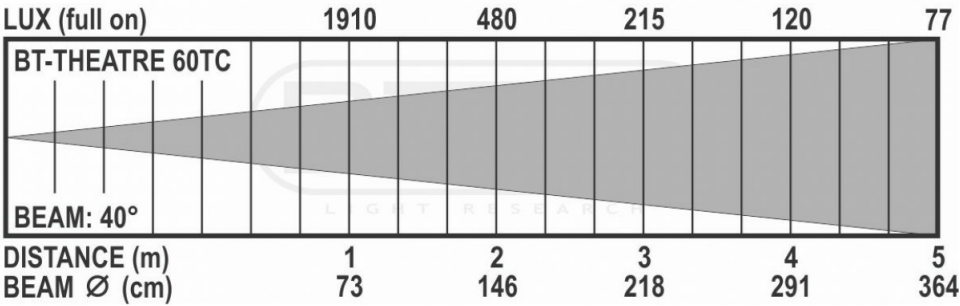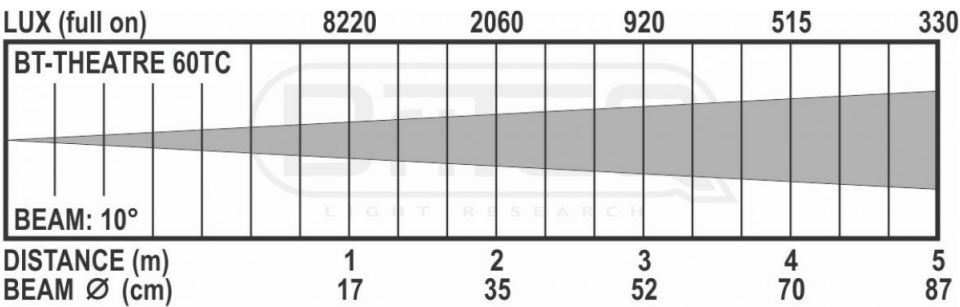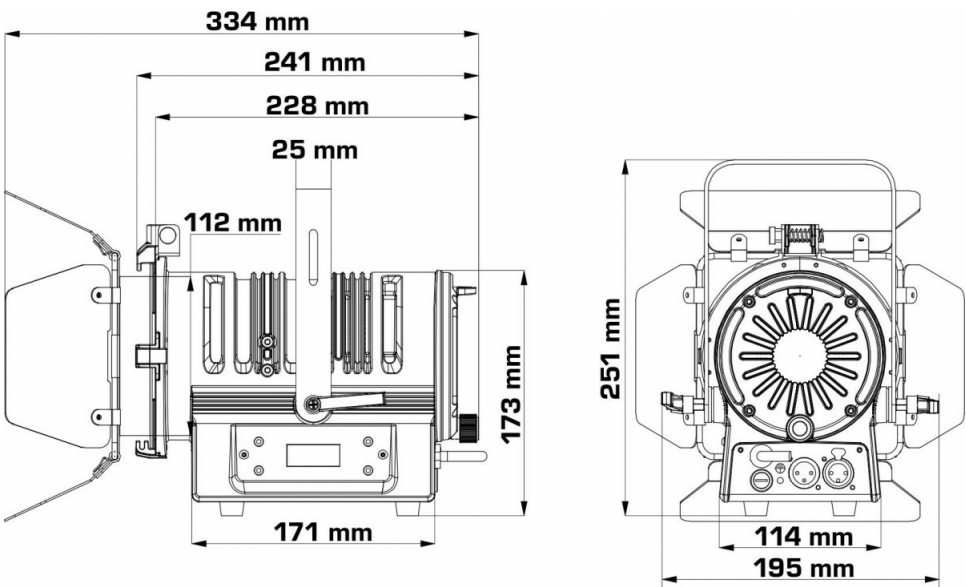

YOUR DEALER



[www.briteq-lighting.com](http://www.briteq-lighting.com) | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.