



DK80T

Loudspeaker ideal for high-fidelity audio reproduction designed ceiling and wall fixing.

LOUDSPEAKERS

- System type: wall speaker

COMPONENTS

- Full range: 4"

FEATURES

- AES/program power: 10/20W
- Input 100 V: 2.5/5/10V

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 91dB @1W/1m (free field)
- Constant voltage: 70/100V
- Frequency response: 150÷16.000Hz (±3dB)

INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

PHYSICAL

- Weight: 1.56kg



DC64T

Aluminium column speaker, reproducing speech with great intelligibility.

LOUDSPEAKERS

- System type: column loudspeaker with transformer

COMPONENTS

- Full range: 8x3"

FEATURES

- AES/program power: 40/80W
- Input 100 V: 20/40V

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 94dB @1W/1m (free field)
- Constant voltage: 70/100V
- Frequency response: 180÷16.000Hz (±3dB)

INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

PHYSICAL

- Dimensions (WxHxD): 105x690x75mm
- Weight: 3.52kg



DC63T

Aluminium column speaker, reproducing speech with great intelligibility.

LOUDSPEAKERS

- System type: column loudspeaker with transformer

COMPONENTS

- Full range: 6x3"

FEATURES

- AES/program power: 30/60W
- Input 100 V: 15/30V

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 92dB @1W/1m (free field)
- Constant voltage: 70/100V
- Frequency response: 200÷16.000Hz (±3dB)

INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

PHYSICAL

- Dimensions (WxHxD): 105x550x75mm
- Weight: 2.74kg



DC62T

Aluminium column speaker, reproducing speech with great intelligibility.

LOUDSPEAKERS

- System type: column loudspeaker with transformer

COMPONENTS

- Full range: 4x3"

FEATURES

- AES/program power: 20/40W
- Input 100 V: 10/20W

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 90dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 250÷16.000Hz (±3dB)

INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

PHYSICAL

- Dimensions (WxHxD): 105x402x75mm
- Weight: 1.98kg



HD63T

Compact horn speaker with a driver, high directivity and efficiency, ideal for intelligible sound and vocal reproduction.

LOUDSPEAKERS

- System type: compact horn speaker

COMPONENTS

- High frequency: 1.7"

FEATURES

- AES/program power: 30/60W
- Input 100 V: 15/30W

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 108dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 250÷10000Hz (±3dB)

INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

PHYSICAL

- IP rating: 66
- Dimensions (WxHxD): 285x280x227mm
- Weight: 1.36kg



HD62T

Compact horn speaker with a driver, high directivity and efficiency, ideal for intelligible sound and vocal reproduction.

LOUDSPEAKERS

- System type: compact horn speaker

COMPONENTS

- High frequency: 1.7"

FEATURES

- AES/program power: 15/30W
- Input 100 V: 7.5/15W

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 106dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 275÷7000Hz (±3dB)


INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire


PHYSICAL

- IP rating: 66
- Dimensions (WxHxD): 222x166x232mm
- Weight: 1.36kg


DK30T - Technical Drawings




DK90T - Technical Drawings




DK80T - Technical Drawings

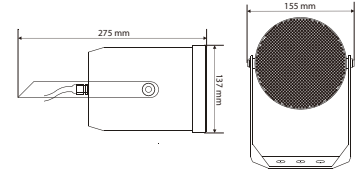


DK88T - Technical Drawings

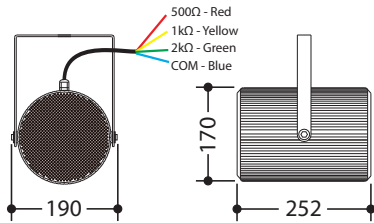


DC62T / DC63T / DC64T - Technical Drawings

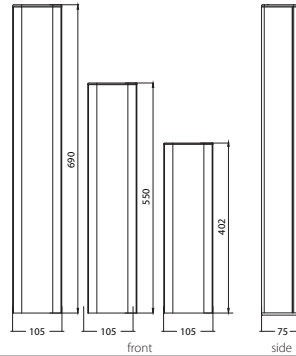

HD100T - Technical Drawings

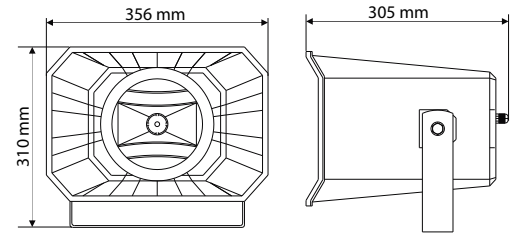

GS62T / GS63T - Technical Drawings

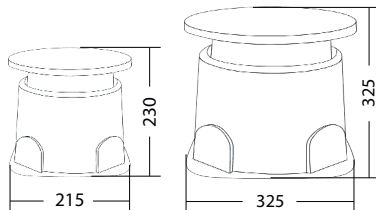

GR62T / GR63T - Technical Drawings

