

Product Guide**A 4911** 2 Channel Mixer With Vox Muting

A 4911 2 Channel Mixer With Vox Muting

**Overview**

This two channel mixer features 2 balanced mic inputs and 2 line inputs. Both inputs 1 and 2 can accept either balanced mic or line level. Microphone connections are via 3 way pluggable euro block and line connections are via stereo RCA socket (converted to mono internally). Two outputs are provided, one balanced output 3mV and one 1V line level.

Inputs and Outputs

Microphone inputs consist of a 3 way Euro block and auxiliary inputs consist of a Stereo RCA socket (converted to mono internally). Two output sockets are available; either balanced microphone 3mV 3 way Euro block or line level 1V Stereo RCA sockets.

VOX Muting

The system can be configured for VOX muting which operates with microphone 1 and Auxillary 1 inputs. This function is has a sensitivity adjustment on the front panel and is switch selectable via the rear panel DIP switch. It can also be used to activate the 24V DC output for control of external devices

Key Features

- ✓ Australian made
- ✓ 10 year manufacturer warranty with local product support
- ✓ 2 balanced microphone / 2 auxiliary inputs
- ✓ VOX muting on both mic 1 and aux 1 inputs
- ✓ Adjustable VOX sensitivity
- ✓ Phantom power on mic inputs
- ✓ 24V DC operation via 2.1mm DC Jack
- ✓ VOX operated 24V DC output for control of external devices
- ✓ Easy to set up and operate
- ✓ Separate volume controls for each input
- ✓ Australian designed & assembled
- ✓ Compact design
- ✓ Solid extruded aluminium case with mounting flanges

About Redback® Public Address Mixers

Redback® mixers are proudly designed, engineered and manufactured in Australia.


Each unit is covered by a comprehensive 10 year parts and labour warranty. Redback® offers rock solid reliability from over 30 years experience in the commercial sound industry. Redback® offer locally available servicing and parts, plus the ability to offer feedback direct to the manufacturer.

Product Guide


A 4911 2 Channel Mixer With Vox Muting



Front Panel

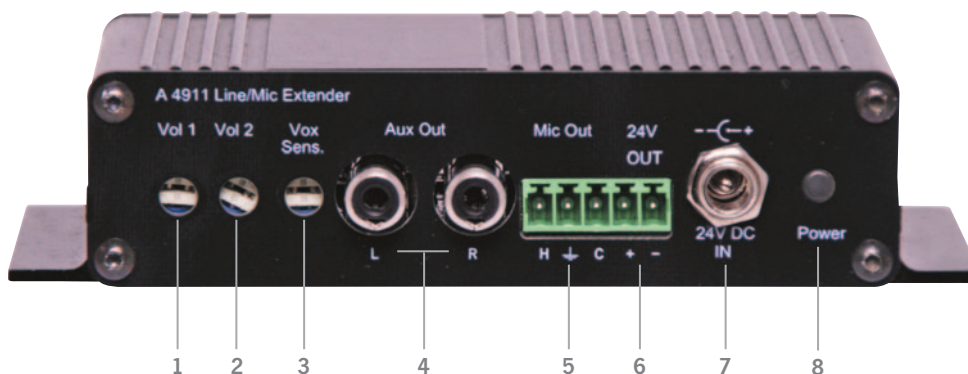

Rear Panel

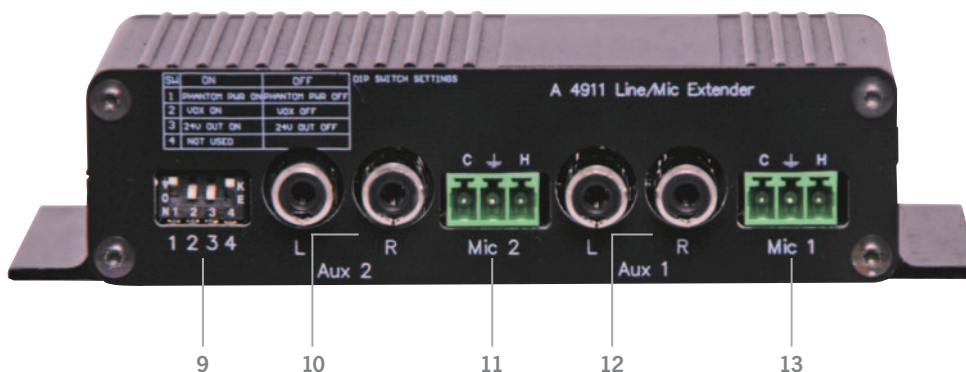

| | | | | | |
|---|-------------------------------|----|--------------------------|----|-----------------------------------|
| 1 | Channel 1 volume adjust | 6 | 24V Output | 11 | Balanced microphone input (Mic 2) |
| 2 | Channel 2 volume adjust | 7 | 24V DC Input | 12 | RCA stereo input (Aux 1) |
| 3 | Vox muting sensitivity adjust | 8 | Power switch | 13 | Balanced microphone input (Mic 1) |
| 4 | RCA stereo line output | 9 | DIP switch settings | | |
| 5 | Balanced microphone output | 10 | RCA stereo input (Aux 2) | | |

Specifications

Inputs

Microphone 1 & 2: 3 pin screw terminals (balanced)

Line 1 & 2: Stereo RCA

Outputs

Mic Output: 3 pin screw terminals (balanced)

Line Output: Stereo RCA

Controls: Ch 1 Volume, Ch 2 Volume, Vox Sensitivity

Indicators: Power

Mechanical

Dimensions: 102W x 27H x 80D mm

Weight: ≈0.21kg

Connections

| | | |
|---------|---------------------------------|---------------------------------|
| Inputs | Mic 1-2 | Line 1-2 |
| | 3 pin screw terminal (balanced) | Stereo RCA |
| Outputs | Line Out | Mic Out |
| | Stereo RCA | 3 pin screw terminal (balanced) |



Made in Australia by Altronic Distributors Pty. Ltd.

Ph: 1300 780 999 Fax: 1300 790 999 Internet: www.altronics.com.au

© 2016 Altronic Distributors Pty. Ltd. Specifications subject to change without notice. E&OE. Revision date: 06/07/2016.