



## DC62T

Aluminium column speaker, reproducing speech with great intelligibility.

### LOUDSPEAKERS

- System type: column loudspeaker with transformer

### COMPONENTS

- Full range: 4x3"

### FEATURES

- AES/program power: 20/40W
- Input 100 V: 10/20W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 90dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 250÷16.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- Dimensions (WxHxD): 105x402x75mm
- Weight: 1.98kg



## HD63T

Compact horn speaker with a driver, high directivity and efficiency, ideal for intelligible sound and vocal reproduction.

### LOUDSPEAKERS

- System type: compact horn speaker

### COMPONENTS

- High frequency: 1.7"

### FEATURES

- AES/program power: 30/60W
- Input 100 V: 15/30W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 108dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 250÷10000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- IP rating: 66
- Dimensions (WxHxD): 285x280x227mm
- Weight: 1.36kg



## HD62T

Compact horn speaker with a driver, high directivity and efficiency, ideal for intelligible sound and vocal reproduction.

### LOUDSPEAKERS

- System type: compact horn speaker

### COMPONENTS

- High frequency: 1.7"

### FEATURES

- AES/program power: 15/30W
- Input 100 V: 7.5/15W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 106dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 275÷7000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- IP rating: 66
- Dimensions (WxHxD): 222x166x232mm
- Weight: 1.36kg



## HD100T

2-way horn coaxial speaker with 6.5" LF driver and 1.5" HF driver, compact size and high acoustic performance.

### LOUDSPEAKERS

- System type: coaxial horn loaded

### COMPONENTS

- Low frequency: 6.5"
- High frequency: 1"

### FEATURES

- AES/program power: 50/100W
- Input 100 V: 2.6/4.5/9/12.5/25/50W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 86dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 250÷10000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- IP rating: 65
- Dimensions (WxHxD): 362x252x310mm
- Weight: 4kg



## GS63T

Outdoor speaker, ideal for background music reproduction.

### LOUDSPEAKERS

- System type: garden speaker

### COMPONENTS

- Low frequency: 6.5"
- High frequency: 1"

### FEATURES

- AES/program power: 25/50W
- Input 100 V: 12.5/25W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 94dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 130÷15.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- IP rating: 55
- Weight: 3.45kg



## GS62T

Outdoor speaker, ideal for background music reproduction.

### LOUDSPEAKERS

- System type: garden speaker

### COMPONENTS

- Low frequency: 6"
- High frequency: 1"

### FEATURES

- AES/program power: 20/40W
- Input 100 V: 10/20W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 94dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 130÷15.000Hz (±3dB)


### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire


### PHYSICAL

- IP rating: 55
- Weight: 2.8kg


DK30T - Technical Drawings




DK90T - Technical Drawings




DK80T - Technical Drawings

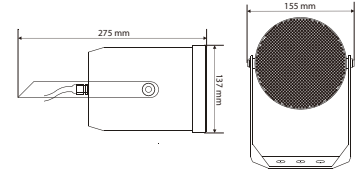


DK88T - Technical Drawings

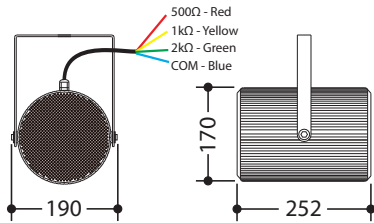


DC62T / DC63T / DC64T - Technical Drawings

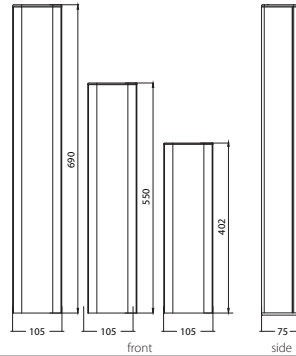

HD100T - Technical Drawings

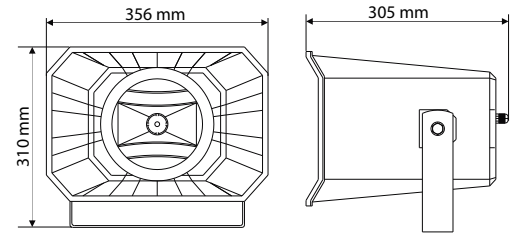

GS62T / GS63T - Technical Drawings

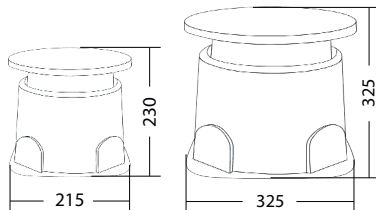

GR62T / GR63T - Technical Drawings

