PHILIPS Lighting



MSD Platinum (Touring/Stage)

MSD Platinum 11 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Color Rendering Index (Nom) -	
Cap-Base	- [-]		
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Main Application	Stage/Touring	Power (Nom)	250 W
Life to 50% Failures (Nom)	2000 h	Voltage (Max)	80 V
System Description	Reflector-E20.9	Voltage (Min)	55 V
Light Technical		Controls and Dimming	
Color Code	2	Dimmable	Yes
Luminous Flux (Nom)	12000 lm		
Chromaticity Coordinate X (Nom)	0.300	Mechanical and Housing	
Chromaticity Coordinate Y (Nom)	0.305	Cap-Base Information -	
Correlated Color Temperature (Nom)	7800 K		

MSD Platinum (Touring/Stage)

Luminaire Design Requirements			
Pinch Temperature (Max)	350 °C		
Product Data			
Full product code	871869653976700		
Order product name	MSD Platinum 11 R 1CT/8		
EAN/UPC - Product	8718696539767		

Order code	928191705314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928191705314
Net Weight (Piece)	85.000 g


Dimensional drawing




 Product
 D (max)
 T (max)
 O
 C (max)

 MSD Platinum 11 R 1CT/8
 51.5 mm
 10 mm
 0.95 mm
 53 mm

Photometric data

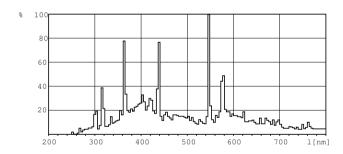

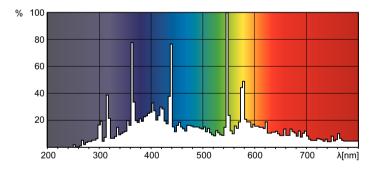



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, March 19 - data subject to change