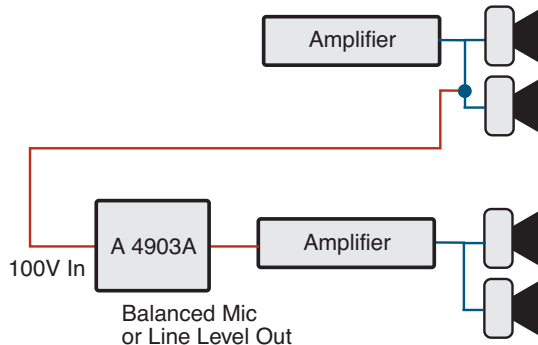


Product Guide**A 4903A** 100V Line to Low Level Adaptor

A 4903A 100V Line to Low Level Adaptor

**Overview**

This useful adaptor receives a 100V signal from one amplifier and reduces the level down to either balanced mic level or line level to feed into the input of a second amplifier. Especially useful for expanding existing systems where additional amplifiers are being installed away from the signal source. This revised version adds an additional XLR output socket with a high level output.

System Diagram**Key Features**

- ✓ **Australian made**
- ✓ **10 year manufacturer warranty with local product support**
- ✓ Volume control
- ✓ Screw terminals for 100V input
- ✓ 3 pin XLR mic sockets
- ✓ 2 x RCA line input socket
- ✓ Requires no power
- ✓ Minimal loading or signal loss
- ✓ Balanced or unbalanced output

About Redback® Public Address Products

Redback® products are proudly designed, engineered and manufactured in Australia.

Each unit is covered by a comprehensive 10 year parts and labour warranty. Redback® offers rock solid reliability from over 30 years experience in the commercial sound industry. Redback® offer locally available servicing and parts, plus the ability to offer feedback direct to the manufacturer.

Product Guide

A 4903A 100V Line to Low Level Adaptor



Front Panel



1	100V line input	3	Stereo RCA auxiliary output	5	XLR 3 pin high level balanced output
2	Volume adjustment	4	XLR 3 pin low level balanced output		

Specifications

Electrical

Input:	100V line
Output:	XLR 3mV or 1V, Stereo RCA 1V
Power supply:	None required

Mechanical

Dimensions:	105W x 25H x 81D mm
Weight:	≈0.20kg

Connections

Input	100V Line
	2 Way Screw Terminal
Outputs	Balanced / Unbalanced
	Stereo RCA auxiliary output 3 Pin XLR low or high level output



Made in Australia by Altronic Distributors Pty. Ltd.

Ph: 1300 780 999 Fax: 1300 790 999 Internet: www.altronics.com.au

© 2016 Altronic Distributors Pty. Ltd. Specifications subject to change without notice. E&OE. Revision date: 11/07/2016.