

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Ceiling Loudspeaker

Metal ceiling loudspeakers with built-in 100V transformer, steel grill and steel fire dome.


EVAC5

Voice evacuation speaker EVAC5 is designed for mounting in false ceilings or panels. Loudspeaker complies with EN54-24 standard and is equipped with ceramic terminal and thermal fuse. These speakers are used wherever intelligible speech announcements are the main requirement.


However, this versatile unit works just as well in background music applications.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

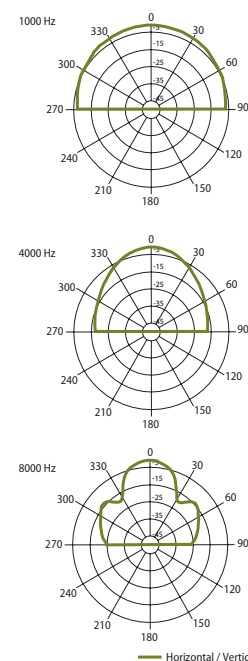

FREQUENCY RESPONSE

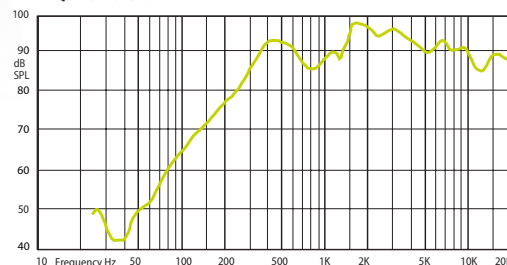

IMPEDANCE

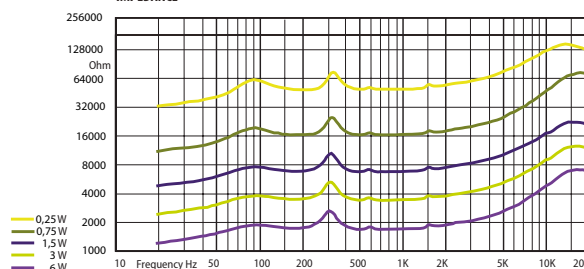

Technical Specifications	EVAC 5
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	106 dB (Pmax/1 m) at 1584 Hz
Frequency response	240 Hz – 20 kHz
Dispersion at 1000 Hz	170° conical
Driver dimensions	5" (127 mm)
Dimensions	ø 185 mm x 118 mm
Weight	1,3 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - black (RAL 9005)