

## SOUND PROJECTORS

# SP Voice Evacuation Projector EN54-24 Certified




Voice evacuation sound projectors with built-in 100V line transformer, ceramic terminal, thermal fuse, certified according to EN54-24 standard.

# SP 10EN


SP 10EN is designed for use in the voice evacuation and paging applications. The clear and intelligible voice announcements will follow installation of these speakers in any application. U-bracket for mounting and position adjustment of the speaker is included in the delivery. The sound projectors are equipped with ceramic terminal and thermal fuse. The speakers are certified according to EN54-24 standard by Intertek.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

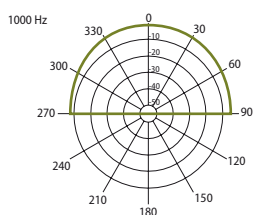


— Horizontal / Vertical



FREQUENCY RESPONSE

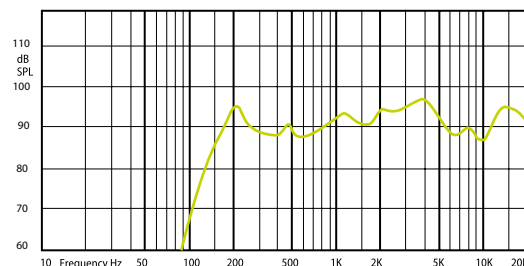

IMPEDANCE

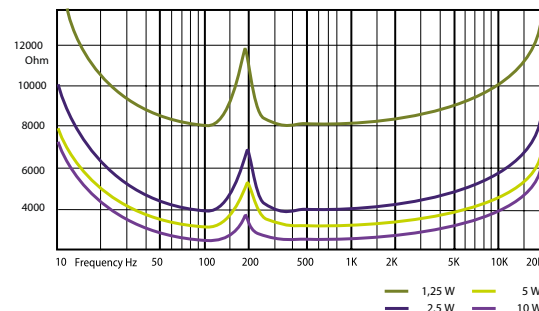

Technical Specifications	SP 10EN
Rated power	10 W
Transformer power taps	10 W - 7,5 W - 5 W - 2,5 W - 1,25 W
Sensitivity	90 dB (1W / 1m)
Maximum SPL	100 dB (Pmax / 1m) at 1 kHz
Frequency response	120 Hz – 18 kHz
Dispersion at 1000	103° (H), 109 (V)
Protection	IP 33
Dimensions	ø 138 mm x 204 mm
Weight	1,3 kg
Material	Plastic housing with aluminium grill, stainless steel U bracket
Colour	White (RAL 9016)