

USB-DI Q Specifications

Input Connector USB type B port

Codec 24 bit High Resolution, 44.1 and 48 KHz

Output Impedance 300 Ohms Transformer Balanced

Output Level 0dB max

Output Noise

- USB - System dependent
- ISO transformer - Environment sensitive

Power Operating current via USB Port 80mA

Headphone output specs:

Max. output level 300mW @ 32 Ohms

Frequency Response 20–20 KHz ± 0.5 dB

Dynamic range 90dB 'A' Weighted

Balanced Output Frequency Response 20 - 20 KHz ±0.5 dB

Output Connectors

1 x Male XLR, wired Pin 2 + Hot, Pin 3 – Cold. Pin 1 Chassis Ground

Construction

All-steel powdercoated chassis, fibreglass PCB, epoxy printing, slip-resistant rubber basepad

System Requirements

Windows PC running Windows XP, 7/8/10 or Mac running OS X or later

USB port

INTERNATIONAL LIMITED WARRANTY

ARX Systems (ARX) warrants to the first purchaser of this Audibox™ product that it is free from defects in materials and workmanship under normal use and service. ARX's sole obligation under this warranty shall be to provide, without charge, parts and labour necessary to remedy defects, if any, which appear within twelve (12) months from date of purchase; and to replace faulty parts only (if still available) for two years from purchase to the original purchaser. Original sales receipt will be required.

This is our sole warranty. It does not cover finish or appearance items, nor does it apply if the Audibox™ has been, in ARX's sole judgement:

- Subjected to misuse, abuse, negligence or accident;
- Repaired, worked on, or altered by persons not authorized by ARX,
- Connected, installed, adjusted or used otherwise than in accordance with the instructions supplied by ARX.

This warranty gives you and us specific legal rights, and you may also have other rights which can vary from country to country and state to state.

To obtain warranty service for your Audibox, please contact ARX or the dealer you purchased it from. If it is necessary to return the unit to the factory, they will give you the correct return address to send your unit to. Have your sales receipt showing date of purchase handy, and include a copy of it with your Audibox. Please pack the unit well - we are not responsible for any damage caused by unsuitable packing during shipment. Send the unit to us pre-paid, by a delivery service like FedEx, UPS, DHL or any other service that can track the shipment. We will return it to you freight paid.

If you have any questions, or any part of this is unclear, please contact ARX Systems as below:

Email : info@arx.com.au
or mail to: PO Box 15, Moorabbin,
Victoria 3189, Australia.

The **USB DI-Q** installs as a fully compatible generic USB audio device, requiring no special driver program installation on Mac OSX, Windows XP, 7/8/10. A quick visit to our USB Audio Knowledge Base page will give you a very good idea of what USB audio can and can't do and common

Plug and Play

The **USB DI-Q** includes a premium quality USB-A to USB-B cable, and is hand made in Australia

The **USB DI-Q** allows the user to monitor and Cue audio files in a closed headphone environment and switch/enable the audio output to a Public address / sound system as required.

The **USB DI-Q** is housed in a heavy duty all-steel chassis finished in attractive matt blue textured powdercoat, with hardwearing epoxy screen printing and slip resistant rubber basepad. It is ideal for interfacing any USB equipped computer (especially notebook computers) with the balanced inputs of professional sound systems.

ARX is excited to present the new **ARX USB DI-Q**. The **USB DI-Q** is an application specific USB – Analogue interface for interfacing and monitoring the playback of audio files in a Court Room or similar environment.


Audiobox™

USB DI-Q


Owner's Manual

The front panel features an overall Playback Volume control for both headphone and XLR outputs and an "enable audio to Court" Switch and indicator LED.

The rear panel has a Type B USB input socket & LED status LED, Summed (mono) Output XLR with Groundlift switch and a 6.5mm / 1/4" Headphone Output socket.

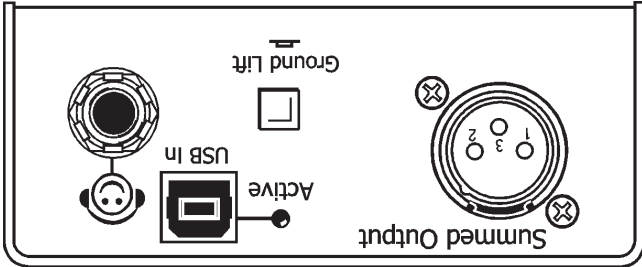

Rear

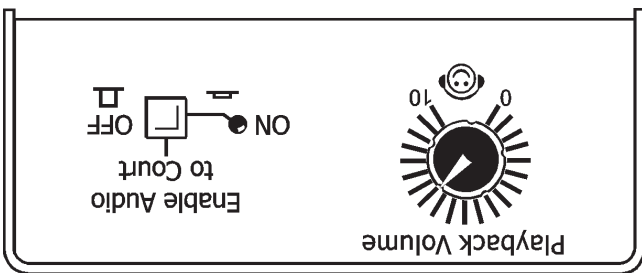

Front



ARX Systems Pty Ltd, PO Box 15,
Moorabbin, Victoria 3189, Australia
www.arx.com.au
Email: info@arx.com.au



Manufactured in Australia