



Name: four-wire square flat copper guide  
 Colour: Black/White  
 Input voltage: 11 V-25 V  
 Specification: 1M/1.5M/2M/3M  
 Suitable for lamps: guide lamp  
 Places of use: large shopping malls, exhibition halls, jacket shops lighting, clothing chain stores, brand counters, footwear stores, jewelry, automobile

Technical parameters of four-wire Guide					
Voltage	Electric current	Fire rating	Bearing	Rice weight	Material Science
220-250V	10A	V0	10KG/M	0.75KG/M	Copper Wire, PVC, Aluminum

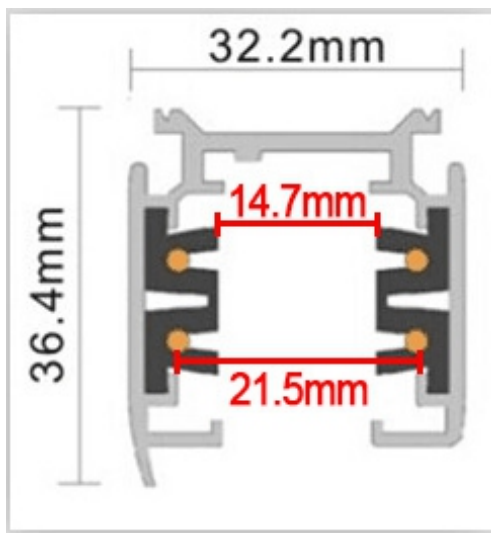

#### Four-wire three-loop square guide rail(including power connector and head and tail)

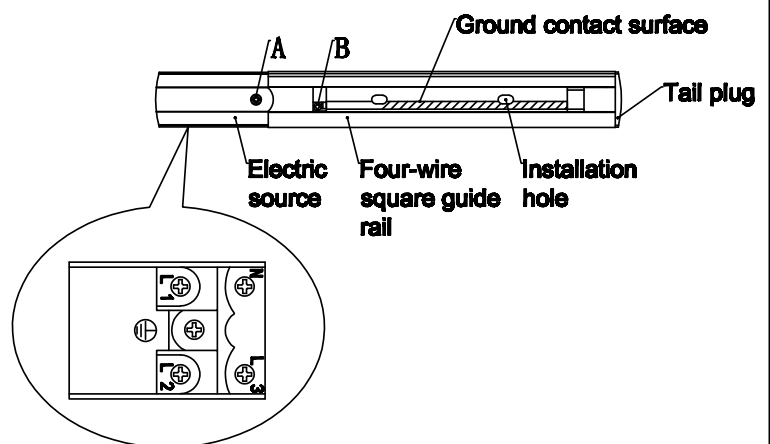

1. According to the installation hole of the guide rail, the guide rail is fixed on the installation surface with the glue plug and self-tapping screw in the accessory package.
2. Remove screw A with a screwdriver, turn on the power connector cover, and connect the power supply connector with the guide rail. After confirming that the fuse(L1, L2, L3), zero line(N) and ground line(⊕) are reliably connected, the upper cover is reloaded~ Finally tighten screw B.