

BT-PROFILE WW

DESCRIPTION

Very compact 3200K WHITE LED profile with 4 blades and 25°-50° zoom






FEATURES

- A very compact but powerful “ALL-IN-1” white LED profile with:
 - Integrated manual 25° ~ 50° zoom
 - 4 blade shutter framing system to make sharp beam cuts
 - The **included gobo holder** guarantees crisp gobo projections
- High quality white with extremely high CRI > 96
- Based on a 150watt WHITE LED 3200K
- Very silent operation with low noise cooling fan and different presets (live, studio, ...).
- Can be used in full standalone mode without any need for DMX (museums, exhibition booths, ...).
- DMX-controlled: 3 different channel modes for maximum flexibility.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- Flicker free TV-recordings thanks to the adjustable high LED-refresh rate!
- Four dimmer settings with different behavior & speed.
- Manual control for dimming, strobe & zoom.
- OLED-display to navigate easily through the setup menu!
- In case of DMX failure, you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- Lightweight but rugged.
- 5pin DMX in/outputs + PowerCON TRUE1 compatible in/outputs for easy daisy chaining.



TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	22.4 x 19.1 x 56.8 (b x h x l)
General : Weight (kg)	6.5
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	170
General : Color	black
General : Display	OLED
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : Modes	standalone fixed, manual, DMX, Master/Slave
Control : Protocol	DMX, RDM
Control : programmable	No
Control : upgradable software	Yes
Control : minimum DMX channels	1
Control : maximum DMX channels	4
Light : lamp socket	No
Light : Lux	816 (beam 25° @5m)
Light : lamp	LED
Light : min. color temperature (K)	3200
Light : max. color temperature (K)	3200
Light : CRI	96
Light : colors	White, Warm white
Light : mix colors	No
Light : functions	manual focus, manual zoom
Light : fixed gobos	1
Light : min. beam angle (°)	25
Light : max. beam angle (°)	50
Light : max. refresh rate (kHz)	25
Connections : input	5 pin XLR, PowerCon® TRUE1 or compatible
Connections : output	5 pin XLR, PowerCon® TRUE1 or compatible
Brand	BRITEQ
EANCode	5420025660501
SKU	B06050

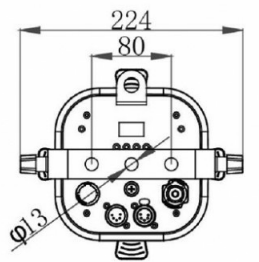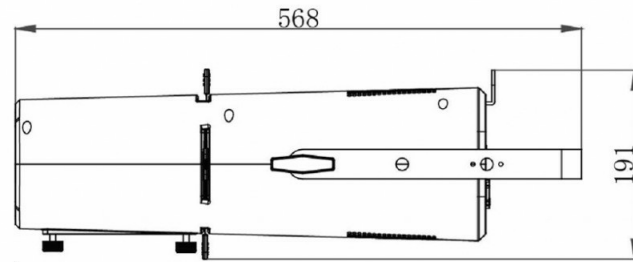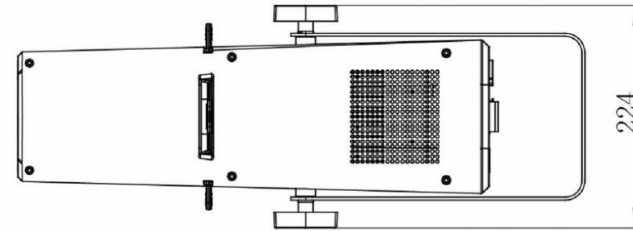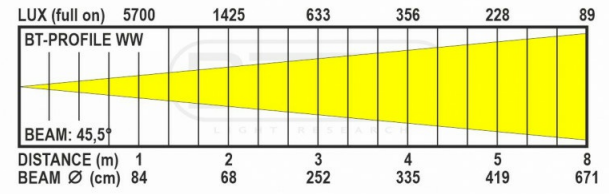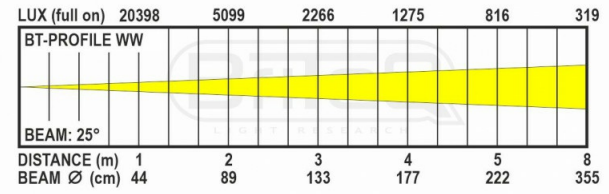

YOUR DEALER



WWW.BRITEQ-LIGHTING.COM | WWW.FACEBOOK.COM/BRITEQ

BEGLEC NV HAS THE RIGHT TO CHANGE PRODUCTS AND SPECIFICATIONS WITH AND WITHOUT NOTICE. MAJOR AS WELL AS MINOR CHANGES CAN BE INVOLVED. THIS LEAFLET CAN CONTAIN ERRORS, THEREFORE WE ADVISE TO CONSULT YOUR LOCAL DEALER TO ENSURE THAT ACTUAL FEATURES AND SPECIFICATIONS MATCH YOUR REQUIREMENTS. COPYRIGHT © 2023 BY BEGLEC NV. ALL RIGHTS RESERVED.