

BT-ORBIT


B04423

DESCRIPTION

Successor of the extremely popular BT-W19L10 ZOOM with increased (65%) output!

FEATURES

- This successor of the extremely popular BT-W19L10 ZOOM is ready to serve stages, rental jobs and discotheques all over the planet!
- The 19pcs 4in1 RGBW 15W leds, combined with redesigned optics **increase the output of the original BT-W19L10 ZOOM by 65% !!!** (8400 lux @5m /10°)
- Extremely bright beam with 3 individually controlled LED-rings and 10° to 60° zoom with perfect color mixing for maximum creativity.
- Prepared for wireless DMX: just plug-in an optional WTR-DMX DONGLE ! (Briteq® order code: 4645)
- Perfect color consistency and extremely smooth dimming from 0% to maximum output!
- High speed pan/tilt movements with 16bit resolution assure dynamic show programming.
- Calibrated color macros for easy and fast show programming
- Two different 14ch DMX channel modes which are 100% compatible with the BT-W19L10 ZOOM.
- Additional 27ch DMX channel mode for full 3 LED-ring control, including all kinds of effect macros.
- Automatic X/Y re-positioning
- Procon in/outputs: easy daisy chaining of several units up to 16A.
- 3pin & 5pin DMX in/outputs for maximum flexibility in a professional environment
- Easy firmware updates keep your machine up-to-date at all times (optional firmware updater needed)
- The LCD-display assures easy navigation in the different setup menus
- High efficiency and low power consumption, only 290W
- Noise level at 1m (no movement): 30.8 dB
- Noise level at 1m (with pan/tilt movement): 35.7 dB
- Equipped with omega brackets for fast installation



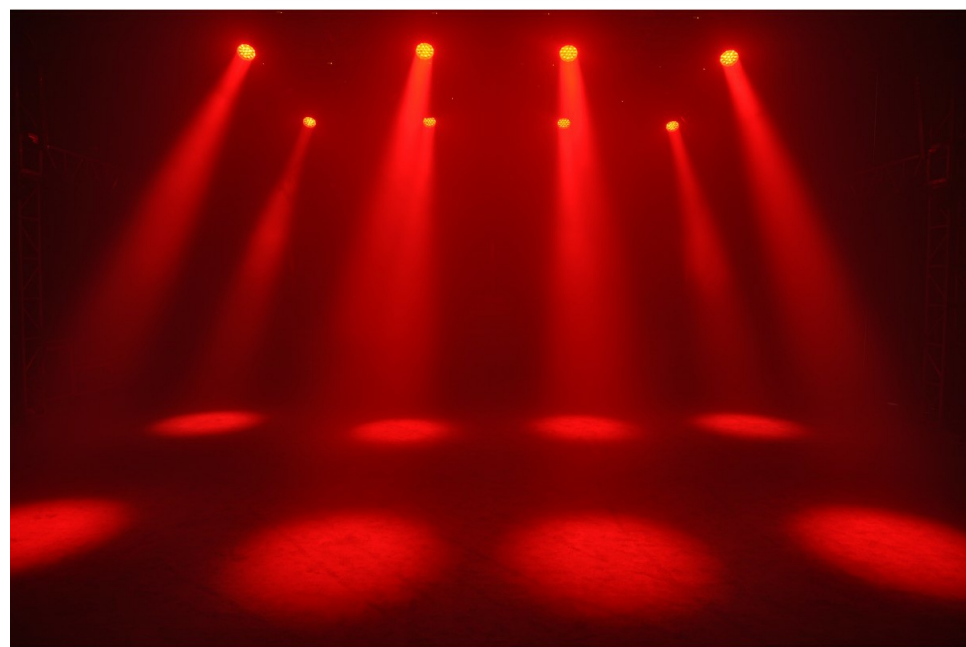


www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2023 by BEGLEC NV. All rights reserved.

TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	39.5 x 32.5 x 22.5 cm
General : Weight (kg)	9.2
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	290
General : Color	black
General : Display	LCD
General : Fixation	optional omega bracket
General : IP rating	indoor
Control : Modes	standalone sound, standalone automatic, manual, DMX, Master/Slave
Control : Protocol	DMX, Wireless DMX
Control : programmable	No
Control : upgradable software	Yes
Control : minimum DMX channels	14
Control : maximum DMX channels	27
Light : lamp socket	No
Light : Lux	577 lux @ 60°@ 5m, 8400 lux @ 10° @ 5m
Light : lamp	LED
Light : colors	RGBW
Light : mix colors	Yes
Light : functions	motorized zoom
Light : min. beam angle (°)	10
Light : max. beam angle (°)	60
Light : max. refresh rate (kHz)	No
Connections : input	3 pin XLR, 5 pin XLR, wireless DMX optional, usb, PowerCon® or compatible
Connections : output	3 pin XLR, 5 pin XLR, PowerCon® or compatible
Brand	BRITEQ
EANCode	5420025644235

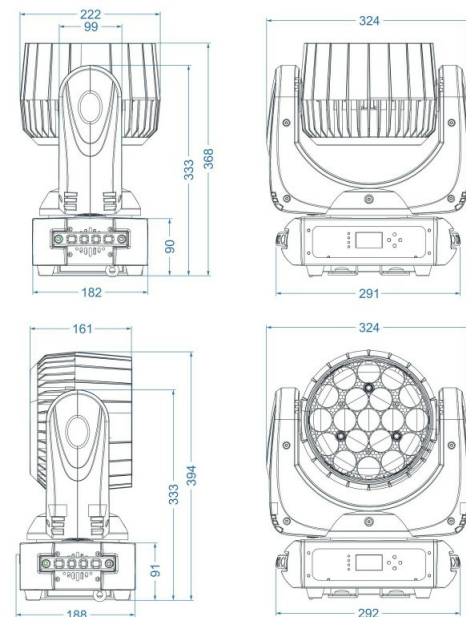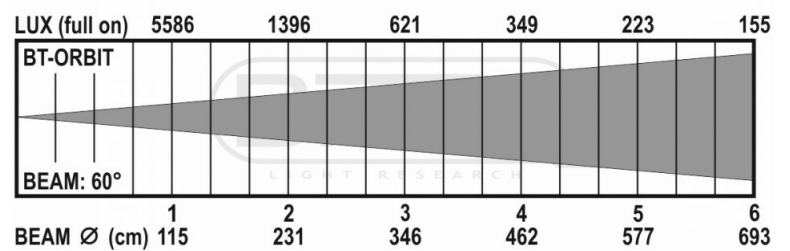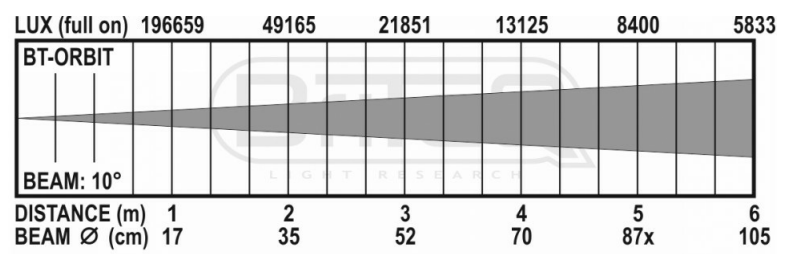

www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2023 by BEGLEC NV. All rights reserved.