

# BT-VENUELITE 4

## DESCRIPTION

Stylish and fanless 3000K white light "HI CRI" 4-cell projector with "evacuation light function" for use in auditoriums, concert halls, art galleries, museums, ...


## FEATURES

- This stylish 4-cell white projector has some very interesting features that make it extremely suitable for lighting in auditoriums, concert halls, art galleries, museums, and many more.
- Equipped with an **Evacuation light function**: in case of power failure, the projector still works for at least 2 hours on the (optional) internal battery (with built-in charger).
- Also, the perfect tool for rental companies: solid battery-powered lighting while breaking down your equipment after a show or automatic lighting during a power outage.
- The robust die-cast aluminum housing provides cooling via natural convection: no fans and therefore **completely silent**.
- 4 cells, each with a 3000K COB with high CRI >90
- Thanks to the high efficiency, it combines high light output with low consumption!
- The standard 45° reflectors can easily be replaced by optional reflectors with different beam angles: 24°, 60°.
- The cells can be controlled in different configurations: 4 together, 4 separate or 2x 2cells
- Wired DMX/RDM or wireless DMX dongle for easy remote control.
- Can also work independently (on/off via switch)
- The standard PowerCON TRUE1 / XLR 3pin connections can be converted quickly to XLR 5pin or fixed wire connections.



## TECHNICAL SPECIFICATIONS

<b>General : Dimensions (cm)</b>	42.3 x 11.2 x 17.9
<b>General : Weight (kg)</b>	5.6
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Works on battery</b>	yes
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	160
<b>General : Color</b>	black
<b>General : Display</b>	OLED
<b>General : Fixation</b>	optional omega bracket
<b>General : IP rating</b>	indoor
<b>Control : Modes</b>	standalone fixed, DMX
<b>Control : Protocol</b>	DMX, Wireless DMX, RDM
<b>Control : programmable</b>	No
<b>Control : upgradable software</b>	No
<b>Control : minimum DMX channels</b>	1
<b>Control : maximum DMX channels</b>	4
<b>Light : lamp socket</b>	No
<b>Light : Lux</b>	620 (beam 45° @ 5m)
<b>Light : lamp</b>	COB
<b>Light : min. color temperature (K)</b>	3000
<b>Light : max. color temperature (K)</b>	3000
<b>Light : CRI</b>	90
<b>Light : colors</b>	Warm white
<b>Light : mix colors</b>	No
<b>Light : functions</b>	manual zoom
<b>Light : min. beam angle (°)</b>	24
<b>Light : max. beam angle (°)</b>	60
<b>Light : max. refresh rate (kHz)</b>	3.6
<b>Connections : input</b>	3 pin XLR, wireless DMX optional, usb, rdm, PowerCon® TRUE1 or compatible
<b>Connections : output</b>	3 pin XLR, rdm, PowerCon® TRUE1 or compatible
<b>Brand</b>	BRITEQ
<b>EANCode</b>	5420025651806
<b>SKU</b>	B05180

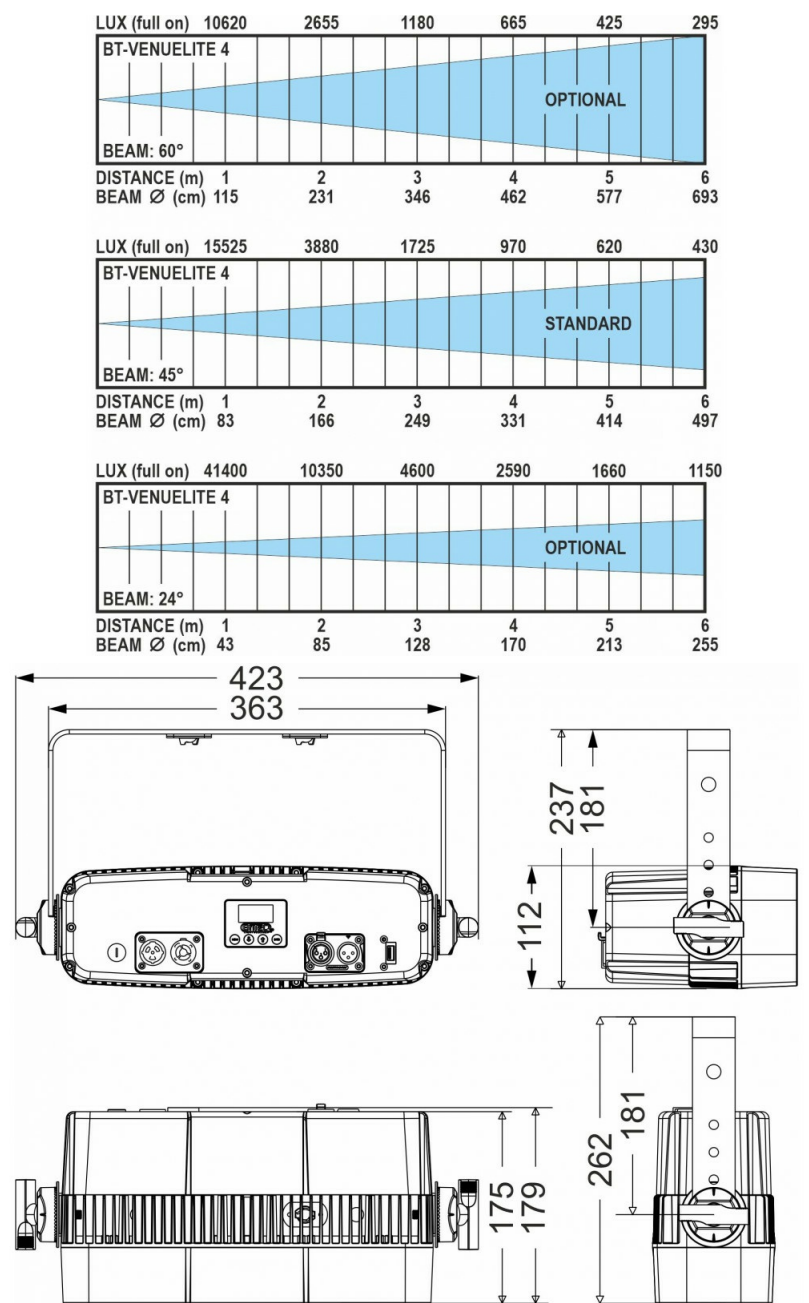

YOUR DEALER

