




Colour option list



High-quality flexible 2 twisted conductors
 professional speaker cable
 Applicant fields: Audio connections
 Conductors: Bare copper OFC(oxygen free copper)
 Electrical Resistance: 24.2/12/12/7.4/7.4/4.5 Ω /km@20°C
 Electrical Capacitance: <130pf/km@1kHz
 Operating Temperature: -20°C/+70°C
 Working Tension: 300/500V
 Minimum Bending Radius: 10x overall diameter
 Packaging: 100m per spool

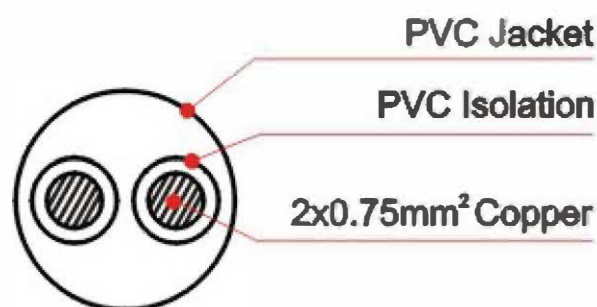

Technical Information

Reference	Conductor Section	AWG	Cable outer Diameter
SC501	2*0.75mm ²	18AWG	O.D.5.5mm
SC502	2*1.3mm ²	16AWG	O.D.6.0mm
173665	2*1.5mm ²	15AWG	O.D.7.0mm
SC504	2*2.0mm ²	14AWG	O.D.7.5mm
176666	2*2.5mm ²	13AWG	O.D.8.0mm
176667	2*4.0mm ²	11AWG	O.D.9.0mm
SC506-1	2*3.0mm ²	12AWG	O.D.8.5mm