

# BTI-BLIZZARD PROFILE

## DESCRIPTION

Powerful IP65 600W LED moving head equipped with full featured framing module, CMY, CTO, IRIS and much more... Low noise operation: perfect for both indoor and outdoor use!



## FEATURES

- › BTI-BLIZZARD PROFILE is a very powerful moving profile projector.
- › Based on a **600W LED** light source.
- › **IP65 protection and low noise operation:** perfect for both outdoor and indoor use!
- › **A real allrounder** that does it all: BEAM, SPOT, WASH and FRAMING!
- › Very high light output: 60610 lux @5m (7°) - 1713 lux @5m (50°).
- › **Perfect for: concerts, events, theme parks, (outdoor) theatres, ...**
- › Wide range 16bit electronic zoom, from 7° to 50° with 16bit motorized (auto) focus.
- › 16bit adjustable iris: 5 → 100%
- › Full featured framing module with 4 individually controlled blades and +/-60° rotation.
- › CMY color system, including several color macros.
- › Gradual CTO: 2700K → 6800K
- › 6+1 fixed colors, including UV.
- › 7+1 replaceable rotating glass gobos with fine indexing.
- › 10+1 fixed static glass gobos for gobo layering.
- › Nonstop rotating animation wheel with indexing.
- › Bi-rotating 4 facet prism.
- › 2 gradual frost filters: 1 light + 1 medium frost.
- › Accurate strobe with built in random, pulse and burst effects.
- › Smooth 16bit dimmer with fast and slow dimming mode.
- › Four dimmer curves: linear, square, inverse square, S-curve.
- › Fast 16bit pan/tilt movements with position correction and pan/tilt speed channel.
- › Super silent fan mode for theater applications.
- › Uses 35, 41 or 44 DMX channels + RDM-functionality for easy remote setup.
- › Full support for Art-Net™ and sACN!
- › Internal webserver for additional remote setup.
- › The matrix LCD-display assures easy navigation in the different setup menus.
- › 5pin DMX in/outputs + RJ45 in/out + PowerCON TRUE1 compatible.
- › DMX in/outputs compatible with BT-XLR5TO3 kit.
- › Equipped with omega brackets for fast installation.
- › Dimensions: 42x36x73cm
- › Weight: 34kg



## TECHNICAL SPECIFICATIONS

<b>General : Dimensions (cm)</b>	42 x 36 x 73 (WxDxH)
<b>General : Weight (kg)</b>	34
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	750
<b>General : Color</b>	black
<b>General : Display</b>	LCD
<b>General : Fixation</b>	included omega bracket
<b>General : IP rating</b>	indoor, outdoor
<b>Control : Modes</b>	standalone fixed, manual, DMX
<b>Control : Protocol</b>	Art-Net, sACN, DMX, Wireless DMX, RDM
<b>Control : programmable</b>	Yes
<b>Control : upgradable software</b>	Yes
<b>Control : minimum DMX channels</b>	35
<b>Control : maximum DMX channels</b>	44
<b>Light : lamp socket</b>	No
<b>Light : Lux</b>	60610 @5m (beam 7°)
<b>Light : lamp</b>	LED
<b>Light : max. color temperature (K)</b>	6800
<b>Light : CRI</b>	75
<b>Light : colors</b>	CMY
<b>Light : mix colors</b>	Yes
<b>Light : functions</b>	motorized focus, motorized zoom, iris, motorized frost, linear frost, 4 facet round prism
<b>Light : fixed gobos</b>	10
<b>Light : rotating gobos</b>	7
<b>Light : min. beam angle (°)</b>	7
<b>Light : max. beam angle (°)</b>	50
<b>Light : max. refresh rate (kHz)</b>	25
<b>Connections : input</b>	5 pin XLR, wireless DMX optional, wifi, artnet, RJ45, rdm, PowerCon® TRUE1 or compatible
<b>Connections : output</b>	5 pin XLR, artnet, RJ45
<b>Brand</b>	BRITEQ
<b>EANCode</b>	5420025655712
<b>SKU</b>	B05571

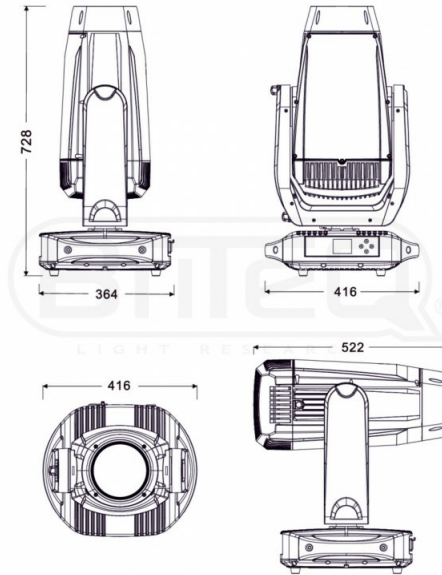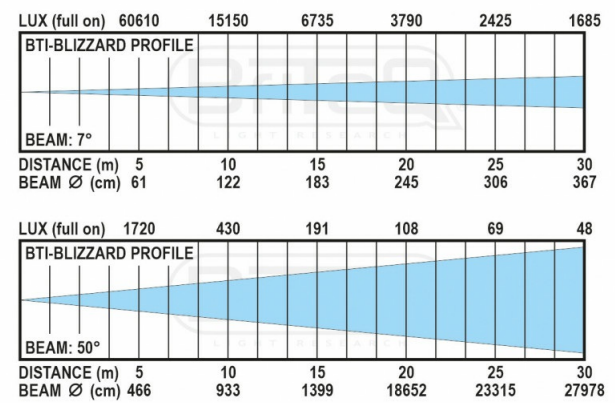

YOUR DEALER



[WWW.BRITEQ-LIGHTING.COM](http://WWW.BRITEQ-LIGHTING.COM) | [WWW.FACEBOOK.COM/BRITEQ](http://WWW.FACEBOOK.COM/BRITEQ)

BEGLEC NV HAS THE RIGHT TO CHANGE PRODUCTS AND SPECIFICATIONS WITH AND WITHOUT NOTICE. MAJOR AS WELL AS MINOR CHANGES CAN BE INVOLVED. THIS LEAFLET CAN CONTAIN ERRORS, THEREFORE WE ADVISE TO CONSULT YOUR LOCAL DEALER TO ENSURE THAT ACTUAL FEATURES AND SPECIFICATIONS MATCH YOUR REQUIREMENTS. COPYRIGHT © 2024 BY BEGLEC NV. ALL RIGHTS RESERVED.