

EclPanel IPHard2x1

2x1 Hard Source LED Panel, IP65 with 550W power and 6 colors source

ORDER CODE: **ECLPANELIPHARD2X1**



The **EclPanel** IPHard2x1 is a 2x1 format IP65 Hard Light, featuring an LED source optimized for long throw film applications. This unit is designed to deliver quality lighting in all weather conditions. Its optical system, equipped with a 6-color LED array and collimator lenses controllable in 8 sections, producing a 20° native beam angle. This configuration enhances lux intensity for long throw uses and broadens the light spectrum, resulting in superior light quality. The **EclPanel** IPHard can be transformed into a soft light source by attaching optical modifiers to its accessory points.

Constructed with durable die-cast magnesium alloy, the IP65 rating of the housing makes the unit water and dust resistant, suitable for challenging environments and sets. The fixture incorporates an onboard power supply and processing unit, facilitating easy setup and operation. It features a 3.5" large display, a user-friendly interface, and comprehensive connectivity options, including both wired and wireless capabilities.

Further enhancing its versatility, the unit supports per-section control for custom or desk-created effects. For added portability, the **EclPanel** IPHard accepts power via 24-36V batteries and a 48V DC input. Its flexibility extends to control options, compatible with DMX & RDM, Ethernet protocols, remote operation via ControlGo, and wireless CRMX.

MAIN FEATURES

- 550W 6 color Hard Light in 2x1 format with 20° beam angle
- IP65 water and dust resistant
- 8 section pixel control and built-in lighting effects for film applications
- Silent operation with multiple fan modes

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 550W 6 colour LEDs source
- Luminous flux: (HB) 36'904 lm - (HQ) 35'755 lm @3.200 K
- Luminous flux: (HB) 38'770 lm - (HQ) 33'409 lm @5.600 K
- Lux: (HB) 5'072 lx - (HQ) 4'962lx @5 m 3.200 K
- Lux: (HB) 5'359 lx - (HQ) 4'700lx @5 m 5.600K
- CRI: 95,5 @3.200 K; 96,3 @5.600 K
- R9: up to 92
- TLCI: 90 @3.200 K; 95 @5.600 K
- TM30 Rf: >91 @3.200 K; > 92 @5.600 K
- TM30 Rg: < 101 @3.200 K; < 102 @5.600 K
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: 20°
- Field angle: 48°
- Lens type: TIR lenses
- Additional optics: Dome diffuser - see available accessories

COLOUR SYSTEM

- Colour control: XY, CCT, Gel, HSI, Source Emulation
- CCT: CCT control range from 1.850K to 20.000K, + / - green correction, tungsten emulation
- White presets: 1.850 K - 20.000K
- Colour wheel: virtual colour wheel with macros
- Macros: Gels library on-board

DYNAMIC EFFECTS

- Control Resolution: 16-bit dimmer, colours
- Pixel patterns: pre-programmed pixel macros and cinema lighting effects patterns
- Special features: color space selection, linear crossfade channel from any white to any colour; virtual CTO on colours

BODY

- Body: weatherproof IP65 construction with die-cast magnesium alloy
- Body colour: black

CONTROL

- Protocols: DMX512, RDM, ArtNet, sACN, CRMX
- Stand Alone: selectable mode through 4 RGB backlight push-encoders
- Pixel control: 8 section control

- Wireless Control: included, LumenRadio TimoTwo DMX/RDM compatible with both CRMX, CRMX2 (Lumen Radio) and W-DMX (Wireless DMX), Bluetooth capable
- RDM: RDM for remote monitoring and settings
- Display: 3.5" with new UI
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX1) not included
- Other: Ethernet pass through in case of failure

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 6 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Display battery: self-charging battery backup
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 1282 ~ 40.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 550W
- Output (at 230V): 4 units on a single power line
- Power factor: > 0,95

PHYSICAL


- IP rating: 65 for temporary outdoor application, not for fixed installations
- Cooling: active, silent operation
- Suspension and fixing: bracket for truss rigging and hardware for connection of more units
- Signal connection: IP65 Seetronic XLR 5p IN/OUT connectors
- Data connection: IP65 Seetronic RJ45 IN/OUT
- Power connection: IP65 Seetronic powerCON TRUE IP65 IN/OUT
- Low Voltage DC connector: XLR 3p for 48V and XLR 4p for 24V-36V
- Dimensions (WxHxD): 819x433x142mm / 32.24"x17.05"x5.59"
- Weight: 19,8kg / 43.65lbs

CERTIFICATIONS / APPROVALS

ACCESSORIES & RELATED PRODUCTS

- FCLPANELIP2X13U Flight case for 3 pcs of ECLPANELIP2X1HARD or ECLPANELIP2X1SOFT
- EPIPH2X1DD Dome Diffuser for ECLPANELIPHARD2X1 series
- EPIP2X1X1RMP2U Rigging metal plate for ECLPANELIP series to mount the products in arrays, 2U
- EPIP2X1X1RMP4U Rigging metal plate for ECLPANELIP series to mount the products in arrays, 4U
- EPTWCBAG1U Bag for 1 pc of ECLPANELTWC
- EPTWCBHEAD Ball head joint for center mount bracket EPTWCBRK series
- EPTWCBRKL Center mount bracket for ECLPANELTWC and ECLPANELTWCJR4X1
- ECLPANELPOYO Pole operated aluminium yoke bracket for ECLPANELTWC
- EPTWCFILTERINT Front intensified diffusion filter for
- EPTWCFILTERHD Front high diffusion filter (less output)
- EPTWCFILTERMD Front medium diffusion filter (included)
- EPTWCFILTERLD Front low diffusion filter (more output)
- ECLFRSPG Spigot for PROLIGHTS Fresnel series (included)
- EPTWCJREC30/60 30/60 degree egg crate for ECLPANELTWCJR
- EPTWCJREC8C 8 chamber egg crate for ECLPANELTWCJR
- EPTWCBDR2 Barn door with 4 directional flaps to adjust the light beam
- EPTWCSB21 SnapBag 2x1 for ECLPANELTWC by DoP choice
- EPTWCJRSG4SB2140 40° SnapGrid for SnapBag, 2x1 by DoP choice
- EPTWCJRSG2140 40° SnapGrid, 2x1 by DoP choice
- EPSRER Rabbit-Ears 2x1 Rectangular for ECLPANELTWC by DoP choice
- EPSBRL5 Snapbag Lantern 5' for Rabbit-Ears by DoP. Incl. Lantern, Carry Bag
- EPSBRL3 Snapbag Lantern 3' for Rabbit-Ears by DoP choice Incl. Lantern, Backcovers, Carry Bag
- EPSBRL5C4 Cover for Snapbag Lantern 5' (EPSBRL5) by DoP choice; 4 sides, adj. with zipper
- EPSBRL3C4 Cover for Snapbag Lantern 3' (EPSBRL3) by DoP choice; 4 sides, adj. with zipper
- EPSBRM SnapBag Medium to be mounted on Rabbit Ears by DoP choice
- EPSGCM40 40° SnapGrid, to be mounted on Snap Bag Medium (EPSBRM)
- EPSBRO3 Snapbag Octa 3' to be mounted on Rabbit-Ears by DoP choice
- EPSGC3W40 40° SnapGrid, to be mounted on Snap Bag Octa 3' (EPSBRO3)
- EPSBRO5 Snapbag Octa 5' to be mounted on Rabbit-Ears by DoP choice
- EPSGC5W40 40° SnapGrid, to be mounted on Snap Bag Octa 5' (EPSBRO5)
- EPSBRO7 Snapbag Octa 7' to be mounted on Rabbit-Ears by DoP choice
- EPSGC7W40 40° SnapGrid, to be mounted on Snap Bag Octa 7' (EPSBRO7)
- EPSBCFNMS Diffusion MAGIC cloth for Snapbag 60x90cm (EPTWCSB21) by DoP choice
- EPSBCFNFS Diffusion FULL Grid cloth for Snapbag 60x90cm (EPTWCSB21) by DoP choice
- EPSBCFNSH Diffusion HALF Grid cloth for Snapbag 60x90cm (EPTWCSB21) by DoP choice
- EPSBCFNSQ Diffusion QUARTER Grid cloth for Snapbag 60x90cm (EPTWCSB21) by DoP choice
- EPSBCFNMQM Diffusion cloth SET(1/4,1/1,MAGIC) for Snapbag 60x90cm (EPTWCSB21) by DoP choice
- EPSBCFNMQHF Diffusion cloth SET (1/4, 1/2,1/1) for Snapbag 60x90cm (EPTWCSB21) by DoP choice
- EPTWCJRLANT21 Snapbag Lantern for ECLPANELTWC by DoP. Incl. Lantern, Backcovers, Carry Bag
- SPGM12 28mm spigot for fixtures, M12 bolt
- SPGM10 28mm spigot for fixtures, M10 bolt
- TIMOUPG Wireless PCB upgrade kit from Tiny PCB to TimoFX PCB
- TOUR53415L03 Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR (f) 5p, L.3m
- 958225L03 3x2.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L. 3m
- 9513FXWL03 Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m
- 9533FXWL03 Ass. 3x2.5mm TH07 cable, SCHUKO plug, MENAC3FXW socket, L.3m
- RSR0630B Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black
- C6002B Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
- C6040B Aluminum clamp for 28mm spigot, 200kg load, 48-51mm tubes
- LRLUNA Single Universe DMX transceiver with Bluetooth
- UPBOX1UP5 Firmware uploader kit, USB IN, 5pin XLR DMX OUT, USB OUT
- UPBOXPRO Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

TECHICAL DRAWINGS

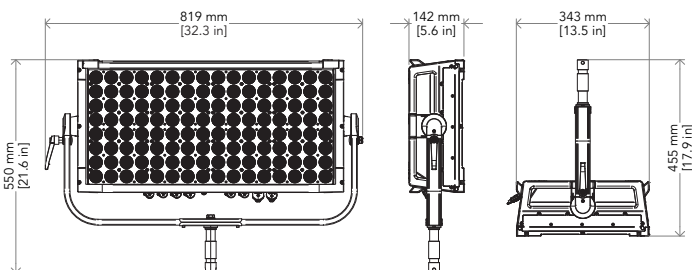

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website for specifications and tech documentations

