



QuikPunch is a high-output, battery-driven and zoomable Fresnel-based spotlight with a dedicated ChargingPlate and PrepBox, removable yoke and SafetyLink-ready barndoors.



Max 20h



Wireless DMX



IP65



App

SPECIFICATIONS

Order Code	AST-QUKPN
LED Engine	Titan LED Engine
Colors	RGBMintAmber
Output Gain	Yes
LED Power Draw	75 W
Tungsten Equivalent	650 W
CRI (Ra)/ TLCI 3200- 6500 K*	≥96
Strobe	0 - 25 Hertz
Battery Runtime	up to 20 hours
Battery Runtime (max. Brightness)	4 hours 30 min
Battery Lifetime	70 % after 500 cycles
Charging Time (nominal)	5 hours 15 min
AC Input	100 - 240 VAC, 50 / 60 Hertz 115 VAC - 0.6 A / 230 VAC - 0.3 A
AC Connector	PowerCON TRUE1 IN / OUT
Power Consumption (max.)	100 W
Wired DMX	Yes
CRMX Receiver	Built-in
BluetoothBridge BTB	Built-in
Wireless Protocols	CRMX, UHF, Bluetooth, WiFi
Wireless Range	CRMX/UHF up to 300 m / 330 yds Bluetooth up to 3 m / 3.3 yds
RDM Support	Wireless and wired
Infrared Control	Yes
PrepBox compatible	Yes
IP Rating wired / unwired	IP65
Ambient Operating Temperature	0 - 40 °C / 32 - 104 °F
Weight	6.567 kg / 14.48 lbs
Dimensions (L x W x D)	237.5 mm x 195.8 mm x 309 mm / 9.35" x 7.71" x 12.17"
Mounting Options	AirlineTrack, 3/8" - 16 UNC thread, Yoke (with 3/8" - 16 UNC thread, 1/2" hole)




All specifications provided are typical values and may be subject to change without prior notice.

RF CHARACTERISTICS

***General allocation of frequencies for use by short-range radio applications


DRAWING

Wireless Modules		EU: UHF*** (863-870MHz)	USA: UHF (917-922.20MHz)	AUS: UHF (922.30-927.50MHz)	SGP: UHF (920.50-924.50MHz)	50.4 mm	KOR: UHF (917.9-921.5MHz)
Modulation	FHSS		FHSS	FHSS	FHSS		FHSS
Power (Transmitter)	<25mW		<25mW	<25mW	<25mW		<25mW
Channel Count	47		53	53	41		10
Wireless Modules		RUS: UHF (863-870MHz)	JPN: UHF (922.80-927.50MHz)	Bluetooth 5.0 LE (2402-2480MHz)	WiFi (2412-2472MHz)		
Modulation	FHSS		FHSS	FHSS	OFDM		
Power (Transmitter)	<25mW		<25mW	<25mW	10mW BLE		
Channel Count	6		1	79	40		
					13		

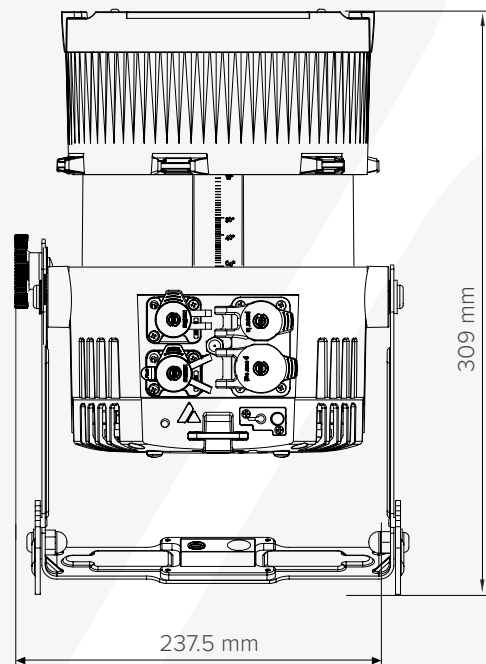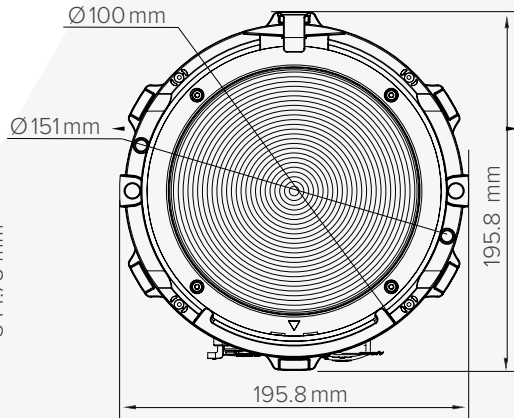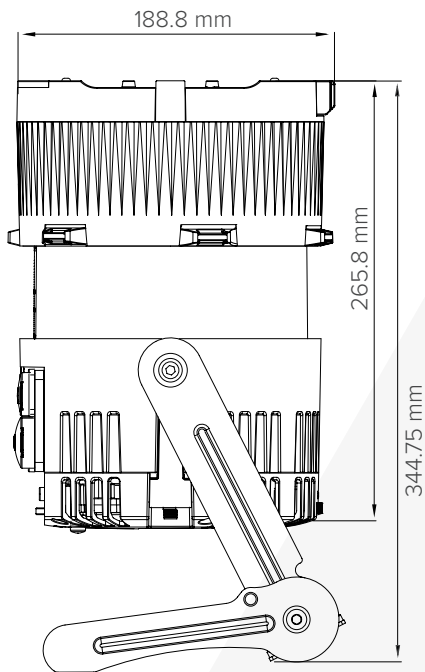


QUIK TURN

Rotate barrel counter-clockwise to zoom in. Zoom range: 13° to 60°

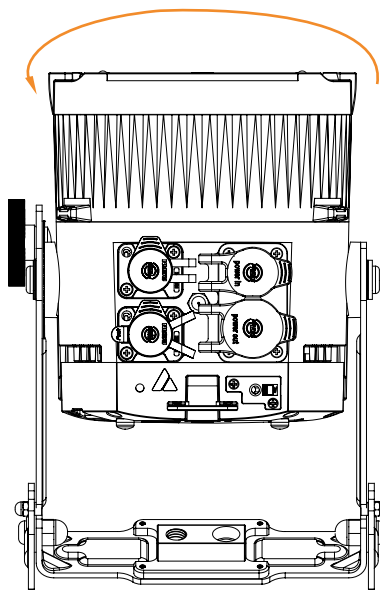


60° Zoom out

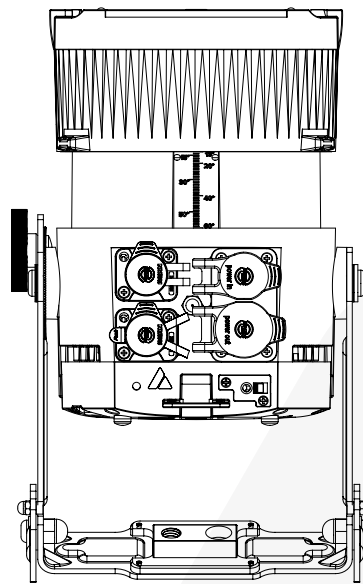

13° Zoom in


BACKSIDE

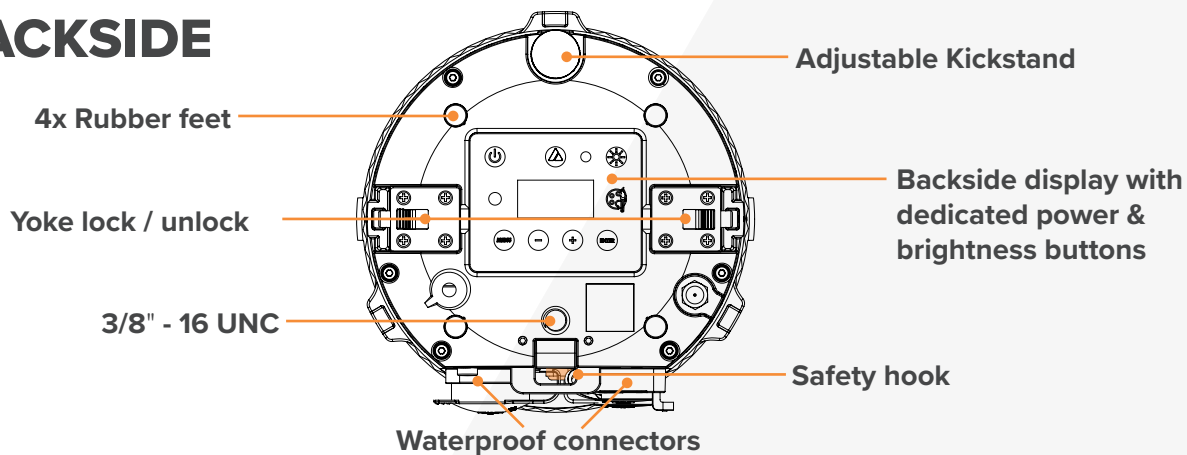

PowerCON TRUE1 IN/OUT, XLR 5 PIN DMX IN/OUT

ACCESSORIES

ChargingPlate
AST-QUKPN-CHRPLT



PrepBox
AST-PRPBX



Barndoor
AST-QUKPN-BD



TrackPin Compact
AST-TPC



FlexCover White
AST-QUKPN-FLXCVR-WT-8



FlexCover Mirror
AST-QUKPN-FLXCVR-MIR-8




EdgeSoftener Filter
AST-QUKPN-ES




Rotatable Filter 17°x46°
AX9-ROTAD




Yoke AST-QUKPN-YK

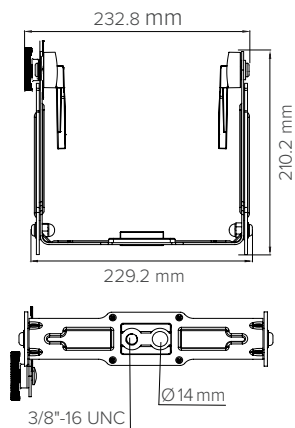


Foldable



Yoke with
TrackPin Compact



Removeable

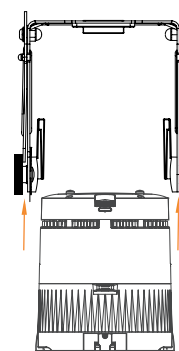

TYPICAL SPECTRAS

