

BTI-AKKUBEAMER

DESCRIPTION

Compact, powerful and extremely versatile battery-powered IP65 projector for outdoor use, equipped with 7x 10W RGBL LEDs



FEATURES

- This compact, battery operated outdoor IP65-projector is equipped with 7pcs 10W RGBL LEDs.
- A real workhorse that can be used for different applications:
 - Battery uplighter: thanks to the double brackets, batteries, and built-in wireless DMX
 - Compact LED-par: the bracket can be equipped with optional truss clamps and/or omega brackets
- The standard 14° beam (2420lux @ 5m) can be changed using optional filters (1 frost filter included).
- The **wireless transceiver** (transmitter + receiver) is 100% compatible with the **W-DMX G4S protocol**.
- Very smooth RGBL color changes.
- The 7800 mAh Li-ion batteries guarantee +/-10hrs use in fading mode!
- The internal battery charger charges the battery while the projector is working on mains power.
- Different working modes for maximum flexibility:
 - **Standalone:** custom colors, color + CCT presets or automatic color changes
 - **Master/slave mode:** the master controls the slaves wirelessly or via XLR cabling, creating wonderful light shows
 - **DMX-controlled:** wired and wireless (4 modes: 3ch HSV, 4ch RGBL, 4ch LEDCON02 and 8ch STAGE for extended control)
 - **IR remote control:** simple control using a cheap (optional) remote, even in master/slave mode
- The graphic OLED display shows a lot of important information, such as the remaining time of the battery. Combined with the touch keys, it also provides smooth setup menu operation.
- Completely silent “passive” cooling (NO cooling fans!).
- Seetronic PowerCON TRUE1 compatible mains in- and output for easy daisy chaining.
- The standard weatherproof 5-pin XLR in- and output connectors can be easily converted in 3-pin XLR with the optional conversion kit “BT-XLR5TO3 KIT”.
- Can be secured with standard laptop “Anti-theft Cable Lock” (available from different brands).
- An optional 120x60cm flight case is available in which up to 8 projectors can be recharged.



TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	17 x 23.4 x 27.9
General : Weight (kg)	5.3
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Works on battery	yes
General : Energy Label	No
General : Power consumption W	75
General : Color	black
General : Display	OLED
General : Fixation	optional omega bracket
General : IP rating	outdoor
Control : Modes	standalone fixed, standalone automatic, remote, manual, DMX, Master/Slave
Control : Protocol	DMX, Wireless DMX, RDM
Control : optional remote	IR-4
Control : programmable	No
Control : upgradable software	Yes
Control : minimum DMX channels	3
Control : maximum DMX channels	8
Light : lamp socket	No
Light : Lux	2420 @5m (beam 14°)
Light : lamp	LED
Light : min. color temperature (K)	2500
Light : max. color temperature (K)	6000
Light : colors	Lime, RGBL
Light : mix colors	Yes
Light : functions	optional frost
Light : min. beam angle (°)	14
Light : max. refresh rate (kHz)	7
Connections : input	5 pin XLR, wireless DMX, rdm, PowerCon® TRUE1 or compatible
Connections : output	5 pin XLR, wireless DMX, rdm, PowerCon® TRUE1 or compatible
Brand	BRITEQ
EANCode	5420025651844
SKU	B05184

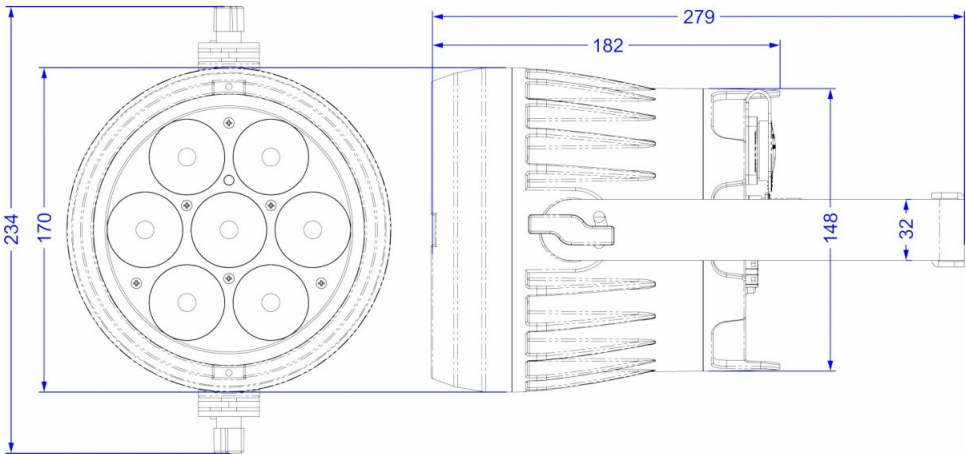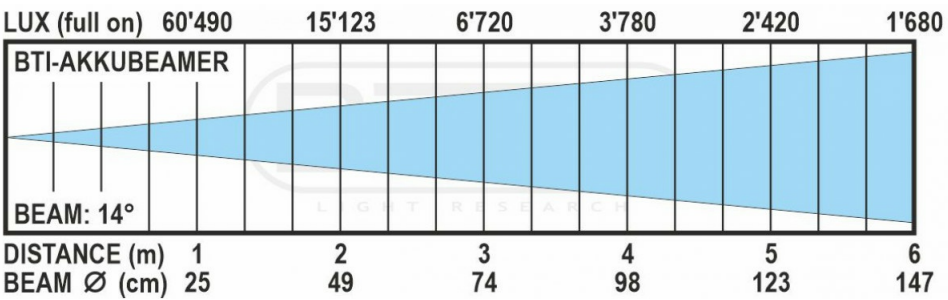

YOUR DEALER



WWW.BRITEQ-LIGHTING.COM | WWW.FACEBOOK.COM/BRITEQ

BEGLEC NV HAS THE RIGHT TO CHANGE PRODUCTS AND SPECIFICATIONS WITH AND WITHOUT NOTICE. MAJOR AS WELL AS MINOR CHANGES CAN BE INVOLVED. THIS LEAFLET CAN CONTAIN ERRORS, THEREFORE WE ADVISE TO CONSULT YOUR LOCAL DEALER TO ENSURE THAT ACTUAL FEATURES AND SPECIFICATIONS MATCH YOUR REQUIREMENTS. COPYRIGHT © 2025 BY BEGLEC NV. ALL RIGHTS RESERVED.