

EclPar IPLVW

IP65 single source 300W VariWhite LED spotlight, 15° optics included

ORDER CODE: **ECLPARIPLVWBK**



The **EclPar** IPLVW stands as a high-performance, IP-rated single source LED spotlight, tailored for grand-scale events such big shows, large exhibitions, and high-ceiling studio applications. This robust fixture is powered by a 300W Variable White light source, capable of producing up to 15,000 fixture lumens with remarkable efficiency and advanced control.

EclPar IPLVW excels in delivering superior white light reproduction with variable CCT, boasting high output and high CRI and TM30 values. Its compact and silent design renders the **EclPar** IPLVW an indispensable tool for both indoor and outdoor stages, blending seamlessly into various environments. The fixture's versatility is further enhanced by its flexible optical system, accommodating a broad range of lenses. These include a narrow 15° lens (onboard), medium 30°, and a wide 60° flood option. Additionally, it supports asymmetric filters and optical modifiers, all swiftly attachable via dedicated accessory holders, allowing for swift adaptation to diverse lighting requirements.

MAIN FEATURES

- 300W Variable White LED delivering high CRI, TLCI, TM30 values
- Flex lens system: 15° on-board - 30°, 60° and asymmetric optional
- IP65 for exterior application

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 300W Variable White LED
- Luminous flux: (15°) TBD; (30°) TBD; (60°) TBD @full
- Lux: (15°) TBD; (30°) TBD; (60°) TBDlx @5 m full
- CRI: 97,6 @full; 97,1 @2'700K; 96,4 @6'500K
- R9: 95 @full; 83,7 @2'700K; 94,1 @6'500K
- TLCI: 99 @full; 97 @2'700K; 98 @6'500K
- TM30 Rf: 93,3 @full; 93,7 @2'700K; 91,5 @6'500K
- TM30 Rg: 100,5 @full; 97,1 @2'700K; 98,1 @6'500K
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: (on-board) 15° - (opt) 30°, 60°
- Field angle: (on-board) 24°
- Lens diameter: 172mm / 6.77"
- Lens type: parabolic reflector in combination with HD fresnel lens
- Additional optics: (opt) 30°, 60°
- Other: possible to mount lens both on the internal side and on the external side

COLOUR SYSTEM

- Colour mixing: tunable white
- CCT: CCT control through dedicated DMX channel
- White presets: 2.700 K ~ 6.500K
- Macros: built-in white presets

DYNAMIC EFFECTS

- Static mode: selection of static dimmer and color temperature
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

BODY

- Body: sturdy die-cast aluminium body
- Body colour: black
- Other: Front mount holder for accessories as barn door, filter frame

CONTROL

- Protocols: DMX512, RDM, CRMX
- Stand Alone: 3 RGB backlight push-encoders

- DMX channels: 1 / 2 / 4 / 5 / 9 / 11channel
- Wireless Control: optional, LumenRadio Timo Fx DMX/RDM compatible with both CRMX (Lumen Radio) and W-DMX (Wireless DMX)
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 40.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 310W
- Output (at 230V): 8 units on a single power line
- Power factor: > 0,94

PHYSICAL

- IP rating: 65 for temporary outdoor use (*)
- Cooling: active, with IP low noise fan
- Suspension and fixing: hanging bracket with baby pin and quick lock system designed for use with OMEGA bracket or floor stand (accessory), hanging system through eye bolt
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Dimensions (WxHxD): TBDmm / 0"
- Weight: kg / 0lbs
- (*) NOTE: Suitable for permanent outdoor use, provided installation and maintenance cycles by qualified technicians are carried.

CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

ACCESSORIES & RELATED PRODUCTS


▪ FCLECLPARIPL	Flight case for 6 pcs of ECLPARIPL series	▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black
▪ EPIPLLENS15/30/60	ECLPARIPL series lens 15°, 30°, 60°	▪ C6002B	Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
▪ EPIPLFHBK	Filter holder for ECLPARIPL series	▪ TOUR53415L03	Dmx cable HC5340. CANS5MXX XLR 5p->CANS5FXX XLR (f) 5p, L.3m
▪ EPIPLFILT1020/1040/1060/3060	Light diffusion filter for ECLPARIPL series, asymmetric 10°x20° 10°x40°, 10°x60°, 30°x60°	▪ 9533FXWL03	Ass. 3x2.5mm TH07 cable, SCHUKO plug, MENAC3FXW socket, L.3m
▪ ECLPARIPLBDBK	Barn door with 8 directional flaps to adjust the light beam for ECLPARIPL	▪ 9513FXWL03	Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m
▪ EPIPLFSNOOTBK	Full snoot for ECLPARIPL series	▪ 958215L03	3x1.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L. 3m
▪ EPIPLHLOUVREBK	Honeycomb louvre for ECLPARIPL series	▪ UPBOX1	Firmware uploader kit, USB IN, 5pin XLR DMX OUT, USB OUT
▪ EPIPLCLOUVREBK	Concentric louvre for ECLPARIPL series	▪ UPBOXPRO	Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector
▪ ECLPARIPMWKBK	CRMX Timo Fx kit for ECLPARIP serie		
▪ SBLFLXFLR	Floor bracket for SUNBLASTFLX		
▪ OS25PLUS	Quick-lock omega bracket, M12 hole		
▪ SPGM12	28mm spigot for fixtures, M12 bolt		
▪ SPGM10	28mm spigot for fixtures, M10 bolt		

PRESET FULL ON

Beam angle 50%: 73°



TECHNICAL DRAWINGS

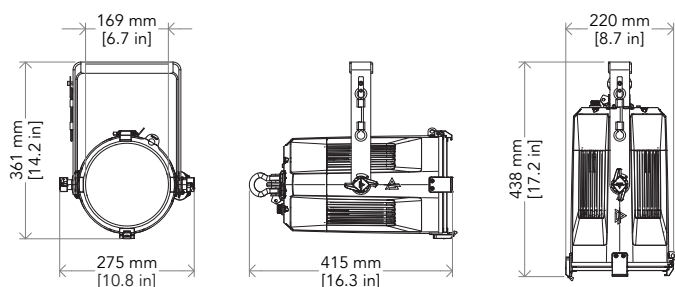

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website
for specifications and
tech documentations

