

# VersaPar

12x10W RGBW/FC LED compact zoom PAR

ORDER CODE: **VERSAPAR**



**VersaPar** is a LED zoom PAR designed for rental companies. The multi-purpose concept combining high brightness, wide zoom range and advanced colour mixing make this a unique fixture. **VersaPar** is equipped with 10° - 60° unrivalled zoom range, high efficiency, perfect chromatic uniformity, HD dimming technology and totally silent operation.

## MAIN FEATURES

- 12x10W RGBW/FC LED
- Wide zoom range from 10° - 60° (1:6 zoom)
- HD dimming with selectable PWM
- Silent operation for studio application

## TECHNICAL SPECIFICATION

### LIGHT SOURCE

- Source: 12x10W RGBW / FC LEDs
- Luminous flux: (10°) 1'450 lm - (60°) 1'786lm
- Lux: (10°) 3'144 lx - (60°) 249lx @5 m full
- Source life expectancy: > 50.000 h

### OPTICS

- Zoom: 10° - 60° motorised linear zoom
- Lens type: plano-convex lens path

### COLOUR SYSTEM

- Colour mixing: RGBW / FC
- Colour wheel: virtual colour wheel with macros
- Macros: built-in white presets

### DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

### BODY

- Body: sturdy die-cast aluminium body
- Body colour: black

### CONTROL

- Protocols: DMX512
- DMX channels: 5 / 7 / 10channel
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

### ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 28 Hz, electronic
- Operating temperature: -10° ~ +40°
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 25.000 Hz

### ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 120W
- Output (at 230V): 12 units on a single power line
- Power factor: > 0,94

### PHYSICAL

- IP rating: 30
- Cooling: active, silent operation
- Suspension and fixing: double hanging bracket suitable for safe hanging and for floor positioning
- Signal connection: XLR 3p + 5p IN/OUT connectors
- Power connection: Neutrik powerCON IN/OUT connectors
- Dimensions (WxHxD): 262x350x261mm
- Weight: 5,5kg

### CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM

## ACCESSORIES & RELATED PRODUCTS

- |                |   |                |   |
|----------------|---|----------------|---|
| ▪ 9513FCAL03   | Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FCA socket, L.3m       | ▪ TOUR53415L03 | Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR (f) 5p, L.3m                |
| ▪ 9533FCAL03   | Ass. 3x2.5mm TH07 cable, SHUKO plug, MENAC3FCA socket, L.3m                 | ▪ FCLPAR4190   | Flight case for 8 STUDIOCOB, VERSAPAR                                       |
| ▪ 958025L03    | 3x2.5mm TH07 Cable, 20A 3p PwCon FCA, 20A 3p PwCon FCB, L. 3m               | ▪ FCLPAR4190E  | Flight case with internal compartments to contain 6 pcs STUDIOCOB, VERSAPAR |
| ▪ C6002B       | Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black          | ▪ STUDIOCOBBD  | Barn door 4 directional flaps to adjust the light beam, f. frame included   |
| ▪ RSR0630B     | Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black | ▪ UPBOX1U      | Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT                    |
| ▪ TOUR53413L03 | Dmx cable HC5340. CANC3MXX XLR 3p->CANC3FXX XLR (f) 3p, L.3m                |                |   |


**PRESET FULL ON**

Beam angle 50%: 10°

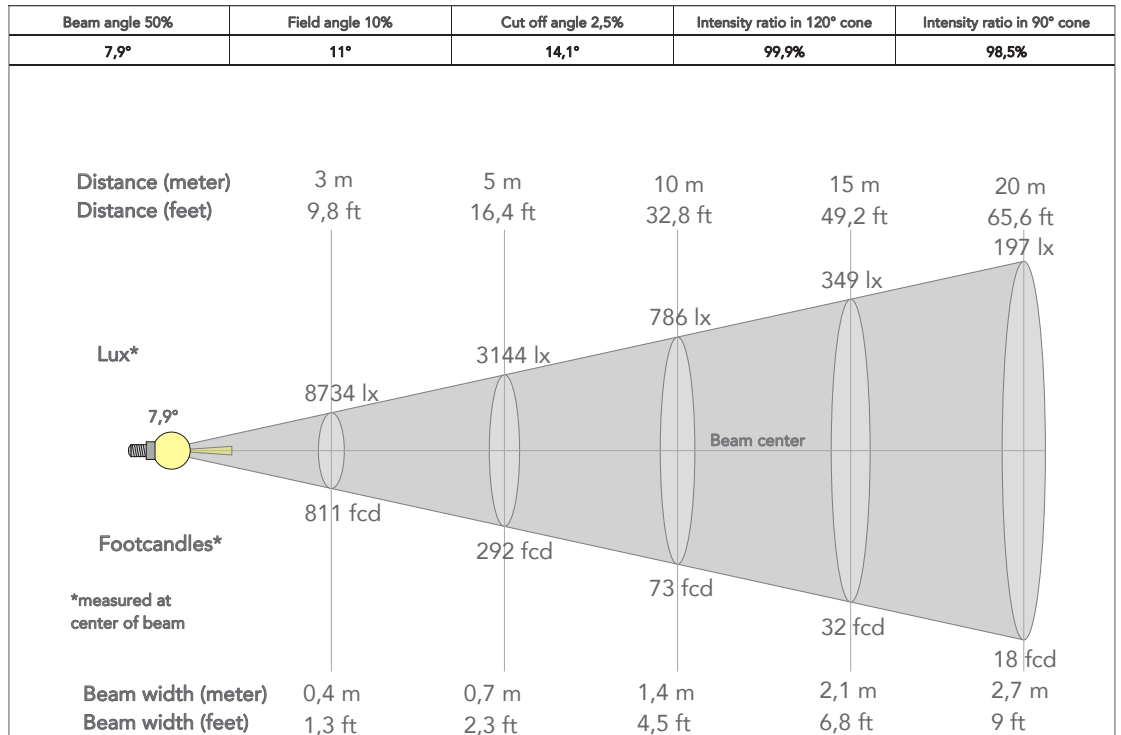


**PRESET FULL ON**

Beam angle 50%: 60°

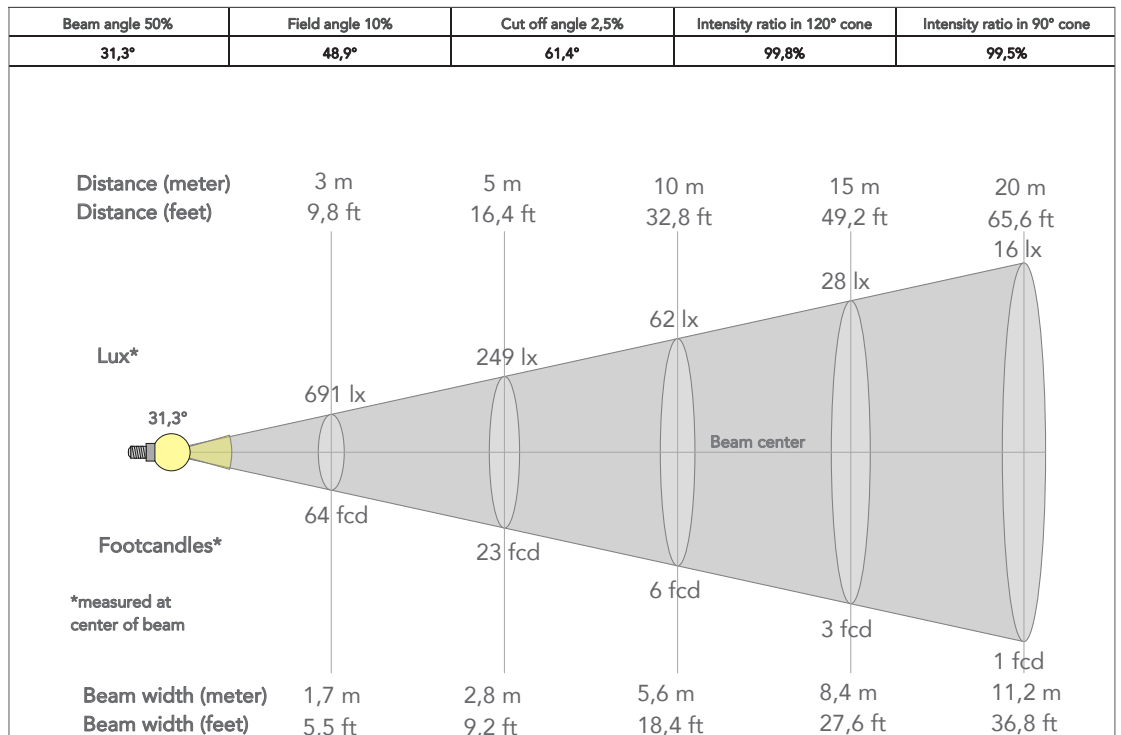

**TECHNICAL DRAWINGS**

**CERTIFICATIONS / APPROVALS**

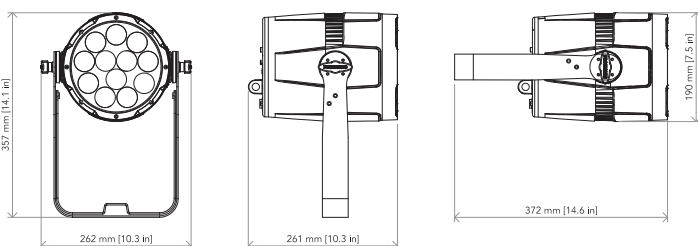

Visit our website for specifications and tech documentations

