

AVM-2

800241

DESCRIPTION

Class-D amplifier module for installation inside the VIBE15 Mk2, VIBE30 Mk2 and VIBE15-SUB Mk2 speakers.

FEATURES

- Class-D amplifier module for installation inside the VIBE15 Mk2, VIBE30 Mk2 and VIBE15-SUB Mk2 speakers
- All you need is a screwdriver and 5 minutes of your time to make the transformation, no technical skills required!
- High output power: 500Wrms @ 8ohm ~ 800Wrms @ 4ohm
- Balanced / unbalanced line input/output (XLR) with volume control.
- 90-250Hz adjustable hi-cut filter for use in active subwoofers.
- Speakon output for optional passive 8ohm cabinet. (preferable same model)
- IEC input mains connector with integrated switch.






TECHNICAL SPECIFICATIONS

General : Application	DJ & Club, Stage & Rental
General : Dimensions (cm)	32 x 16 x 7.8 cm
General : Weight (kg)	2.79
General : Color	black
General : Powerinput	AC 240V, 50Hz
General : Energy Label	No
General : Power consumption W	1000
General : Display	none
General : IP rating	indoor
Audio : amplifier class	D
Audio : min. frequency (Hz)	20
Audio : max. frequency (Hz)	20000
Audio : frequency range	... Hz - ... Hz
Audio : S/N ratio (> dB)	88
Audio : damping factor (>...)	350
Audio : Wrms 4Ω stereo, per channel	800
Audio : Wrms 8Ω stereo, per channel	500
Audio : functions	limiter
Connections : input	3 pin XLR, IEC
Connections : output	3 pin XLR, speakon
Brand	JB SYSTEMS
EANCode	5420025602419

YOUR DEALER

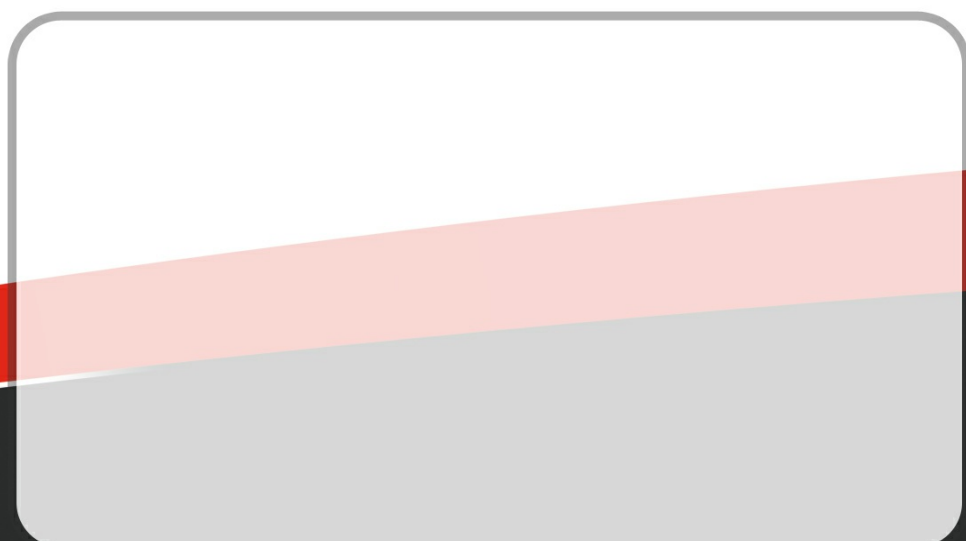

www.jb-systems.eu | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2019 by BEGLEC NV. All rights reserved.

