

BT-THEATRE 100EC MK2 06008

DESCRIPTION

Cost effective LED theater spot with manual 10° ~ 50° zoom.

FEATURES

- Cost effective LED theater spot with manual 10° ~ 50° zoom.
- Not only for use in theatres but also perfect for showrooms, shops, exhibition booths, rental, ...
- The powerful 100W white COB makes it a perfect replacement for a traditional 1000W halogen theater spot: max 7800 lux @2m (beam angle: 10°)
- Color frame for use of color filters and **barn doors included**
- No more heavy and expensive dimmer packs needed!
- Color temperature 3200K with high CRI-factor: 85 for natural colors
- LCD-display to select different working modes:
 - Standalone (master) Mode : set dimmer + strobe (if needed)
 - Master/slave mode: connect several projectors together, the first projector controls the others.
 - DMX-controlled, 1CH: dimmer
 - DMX-controlled, 2CH: dimmer, strobe
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- Partly extruded black anodized aluminium housing with strong bracket
- Neutrik PowerCon in/outputs: easy daisy chaining of several units.
- Both 3pin & 5pin DMX in/outputs for maximum compatibility
- Forced very low noise fan cooling (31dB @ 1m)






www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.

SPECIFICATIONS

General : Application	Stage & Rental, Theatre
General : Dimensions (cm)	27.8 x 30.5 x 33.6
General : Weight (kg)	6.2
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	125
General : Color	black
General : Display	LCD
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : manual	No
Control : Master/Slave	Yes
Control : DMX M/S	No
Control : Standalone	fixed
Control : Type included remote	-
Control : optional remote	-
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	2
Light : lamp socket	none
Light : Lux	7800 lux @ 2m (beam angle : 10°)
Light : lumen	-
Light : lamp	COB
Light : min. color temperature (K)	3200
Light : max. color temperature (K)	3200
Light : CRI	85
Light : colors	White, Warm white
Light : mix colors	No
Light : fixed gobos	-
Light : rotating gobos	-
Light : focus	None
Light : zoom	Manual
Light : iris	No
Light : prism (# facets + rotating y/n)	-
Light : frost filter	No
Light : min. beam angle (°)	10
Light : max. beam angle (°)	50
Light : min. refresh rate (kHz)	3.6
Light : max. refresh rate (kHz)	3.6
Connections : input	3 pin XLR, 5 pin XLR, powercon
Connections : output	3 pin XLR, 5 pin XLR, powercon
Brand	BRITEQ
EANCode	5420025660082
Discontinued	No

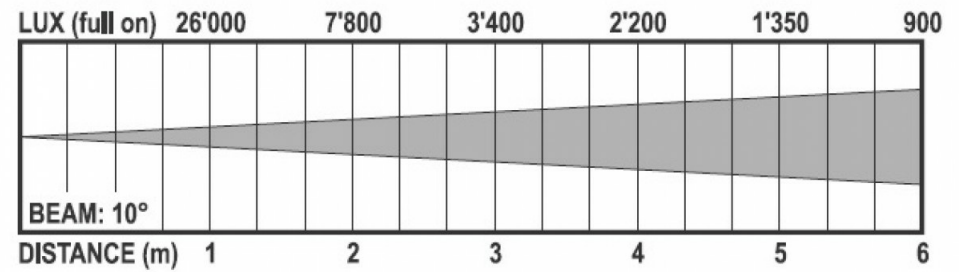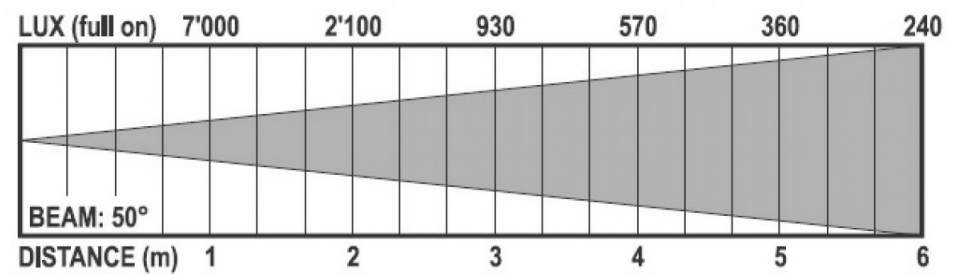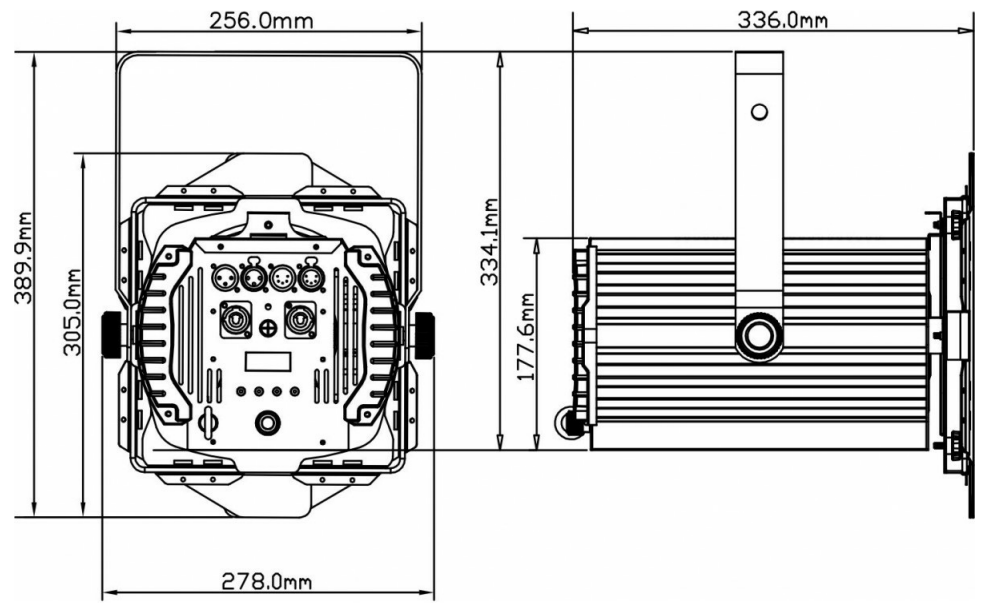

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.