


RGBW Pixel Tape (8PX)

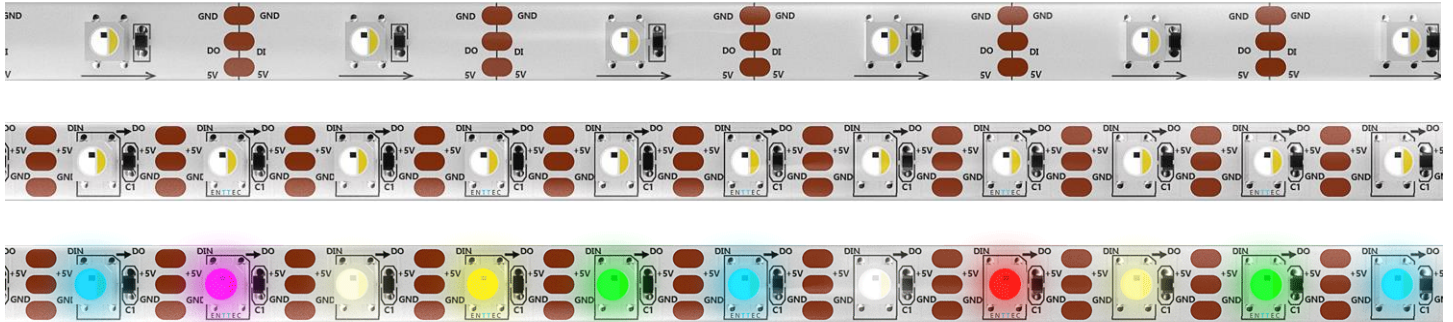

Features


- RGBW, 4 in 1 full colour LED
- Individually addressable, suitable for both stage and architectural applications
- Available in two different densities: 30 and 60 pixels/Metre
- Designed for use with ENTTEC Pixel Link System
- Total wattage - up to 14.1 Watt/Metre
- Up to 400 Lumens/Metre
- WS2812B chips built into 5050 RGBW LEDs
- Each pixel can achieve 4,294,967,296 colours and scan frequency not less than 400Hz
- 3M adhesive double side tape at the back
- Built-in data signal reshaping circuit
- 5V DC input supply voltage
- Flexible construction material
- Front Polymer encapsulation seal
- Small LED pitch
- Can be joined together
- Can be cut to a smaller length
- IP20 Indoor use only

Safety


- Do not expose the units to rain
- Do not allow water or other liquids to build up around the tape.
- Do not exceed the rated 5V DC power supply.
- This unit is intended for indoor use only, use of this product outdoors voids all warranties.

Physical Dimensions

30 Pixels/meter

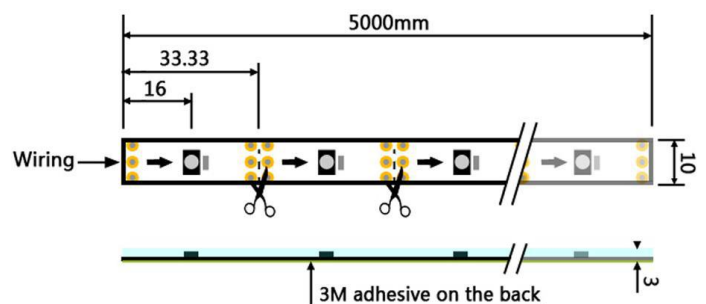

60 Pixels/meter

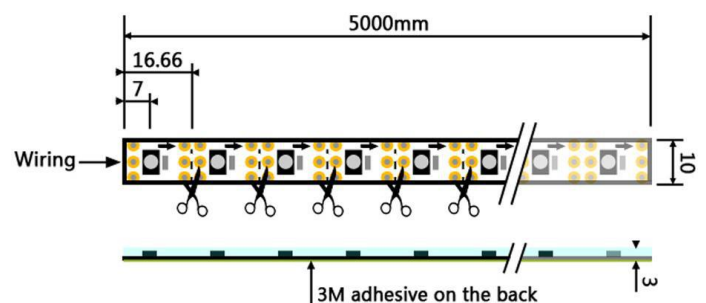


Specifications

Item	8PX30	8PX60
Input Voltage	+4.8V ~ +5.2VDC	
Data line Voltage	-0.5V ~ VCC+0.5V	
Watts/meter (max)	RGB: 4.5W W: 2.5W Total: 6.5W	RGB: 9W W: 5.1W Total: 14.1W
Lumens/meter	RGB: 87 W: 114 Total: 201	RGB: 174 W: 228 Total: 402
DMX Channels/LED	4	
Color temperatures	White LED: 4350K RGB White: 15700K	
Beam angle	120 °	
Control protocol	WS2812B	
Connector	JST SM connectors	
Weight	258 g	
Operating temperature	5 to 50°	
Pixel Mapping Order	GRBW	

Connections with Pixie Driver:


The below diagram shows a standard connection between 8PX and ENTTEC Pixie Driver. It is important to turn off the mains to the devices before doing any connections.

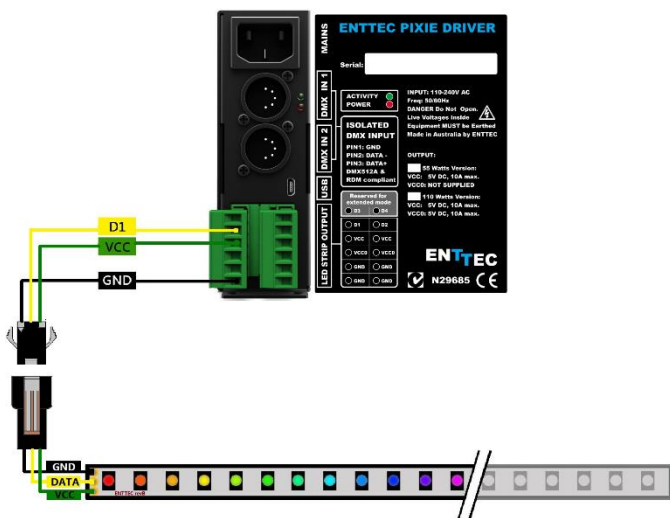

Note:

- The wire in the middle of a JST connector is always DATA regardless of color
- It is important to turn off the mains to the devices before doing any led tape connections.

Connections with Plink Injector:

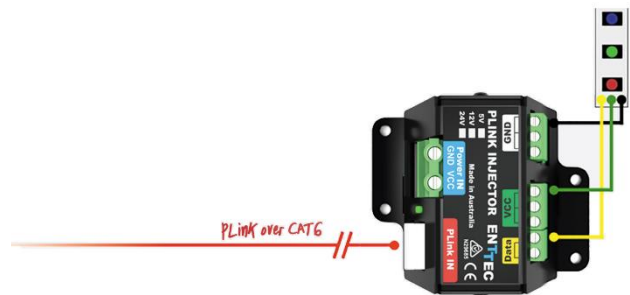

Note:

- The wire in the middle of a JST connector is always DATA regardless of color
- It is important to turn off the mains to the devices before doing any led tape connections.

Ordering Information

The ENTTEC RGBW Pixel strips and compatible products can be ordered from our website or through your ENTTEC dealer.

Item	Value
73540	PIXIE DRIVER 5V (110 WATTS)
73541	PIXIE DRIVER 5V (55 WATTS)
73546	Plink Injector 5V
8PX60-4	RGBW PIXEL TAPE 60 LEDS/METER 5V - 4M Roll
8PX30-F	RGBW PIXEL TAPE 30 LEDS/METER 5V - 5M Roll

enttec.com

MELBOURNE AUS / LONDON UK / HILLSBOROUGH NC, USA