



## 9C Series Commercial Grade LED Tape



### Features

- Minimum 8mm pitch
- Supplied in 50 meter reels
- Standard size 11mm(W) x 2.3mm(H)
- Customized Length available
- 120 LEDs per meter
- High light output L70-50000 hours
- High- quality LEDs with 2 step binning for maximum color consistency and longevity
- Dimmable by ENTTEC CV Driver or DIN-LED4PX
- Can be joined together
- Can be cut to a smaller length
- Minimum cut length 50mm(except for 9CY)
- Input and output connections (loose cable)
- Constant current control, consistent brightness along the full length.
- 9CL series maximum continuous operating length up to 17M from a single power source
- IP20 Indoor use only

### Specifications


Item	Value
<b>Input Voltage (VCC)</b>	+24 VDC
<b>Consumption (W/m)*</b>	
<b>9CL</b>	6.4
<b>9CM</b>	9.6
<b>9CH</b>	14.64
<b>9CU</b>	20.4
<b>9CY</b>	11.8
<b>Output Luminance (lm/m)</b>	
<b>9CL</b>	562
<b>9CM</b>	840
<b>9CH</b>	1385
<b>9CU</b>	1704
<b>9CY</b>	488(3000k)+570(5500k)
<b>Operation Temperature</b>	-10° to 50° C
<b>Connection (In/Out)</b>	Loose Cable

\*Please Note: Operating the strip without a proper heat-sink can permanently damage the electronics and void the warranty. Several of heatsink extrusions can be purchased from ENTTEC website.




## Dimensions

All except for 9CY

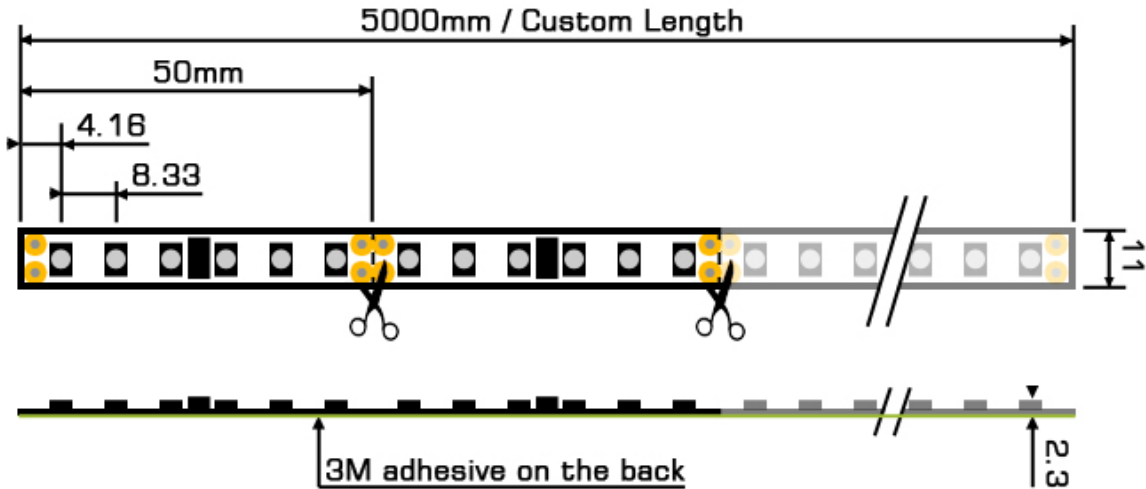

9CY Only

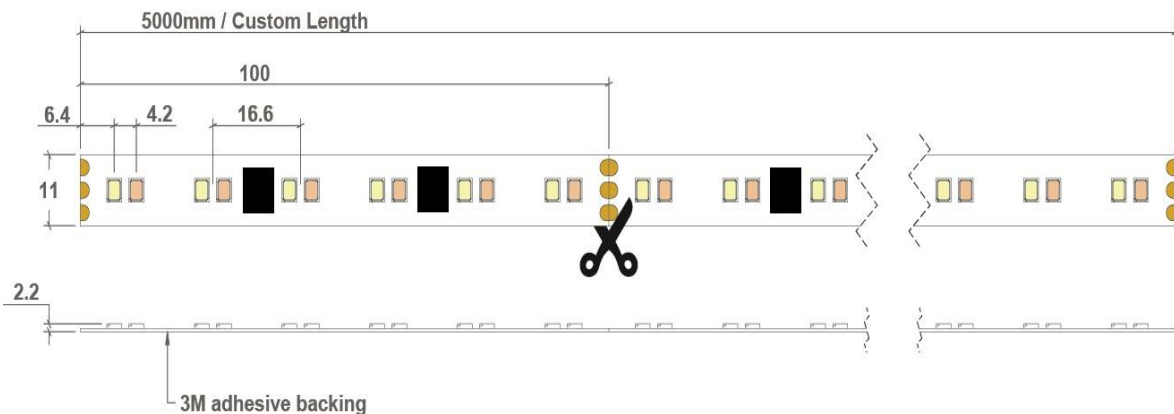

## Continuous operating length

Item	Value
<b>Type</b>	<b>*Maximum continuous operating length (m)</b>
9CL	17
9CM	13
9CH	9
9CU	6
9CY	9.2

\*Please Note: The maximum continuous operating length is measured with a single 24V power supply and it only injects power to one end of the product. At any point of maximum continuous operating length, the light intensity remains the same.

Due to continuous improvements and innovations of all ENTTEC products, specifications and features are subject to change without notice.



## Ordering Information

The ENTTEC LED strips and compatible products can be ordered from our website or through your ENTTEC dealer.

Item	Value
<b>73520</b>	ALEPH 1 CV DRIVER (24V)
<b>79324</b>	24V 60W Constant Voltage LED PSU
<b>71003</b>	DIN-LED4PX
<b>9CL1</b>	Cool White (6000K CRI>80**) Standard Output Strip
<b>9CL2</b>	Neutral White (4000K CRI>80**) Standard Output Strip
<b>9CL3</b>	Warm White (3000K CRI>80**) Standard Output Strip
<b>9CM1</b>	Cool White (6000K CRI>80**) Medium Output Strip
<b>9CM2</b>	Neutral White (4000K CRI>80**) Medium Output Strip
<b>9CM3</b>	Warm White (3000K CRI>80**) Medium Output Strip
<b>9CH1</b>	Cool White (6000K CRI>80**) High Output Strip
<b>9CH2</b>	Neutral White (4000K CRI>80**) High Output Strip
<b>9CH3</b>	Warm White (3000K CRI>80**) High Output Strip
<b>9CY</b>	Colour Temperature Adjustable Strip(3000k-5500K CRI>80**)
<b>9CU1</b>	Cool White (6000K CRI>80**) Ultra High Output Strip
<b>9CU2</b>	Neutral White (4000K CRI>80**) Ultra High Output Strip
<b>9CU3</b>	Warm White (3000K CRI>80**) Ultra High Output Strip

\*\*Tolerance of Color Rendering Index:  $\pm 2$

### ENTTEC PTY LTD

7 Macro Court  
Rowville Victoria  
3178 Australia

T: +61 3 9763 5755

F: +61 3 9763 5688

Email:

[sales@enttec.com](mailto:sales@enttec.com)

### ENTTEC AMERICAS

604A Cornerstone Ct.  
Hillsborough NC 27278  
USA

T: (888) 454-5922

F: (888) 454-5922

Email:

[sales.americas@enttec.com](mailto:sales.americas@enttec.com)

### ENTTEC EUROPE

B23 Parkhall Business Centre  
40 Martell Road  
London SE21 8EN  
United Kingdom

T: +44(0) 2070616210

Email:

[sales@enttec.co.uk](mailto:sales@enttec.co.uk)