


**EX3
DRIVE**

DL4


DIRECT CONTROL



FRONT VIEW

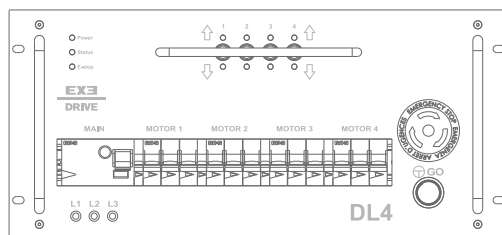

BACK VIEW

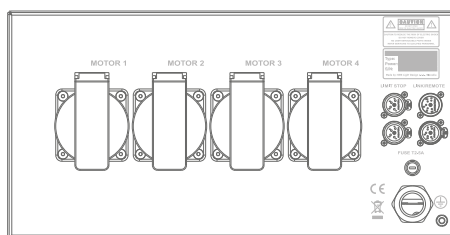

XDDL4

4-CHANNEL MULTILINK CONTROLLER

KEY FEATURES

- 3 Bicolor Led Light Green/Red for Phase Rotation indication 123 – 321
- GFI 40A (30mA)
- 4 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal Cut off
- 4 x direction contactor reversal
- Emergency Stop button
- White GO button with light indication
- 4 x 3-position travel direction switches (UP-OFF-DOWN)
- 4 x green LED lights indicating channel UP preselection
- 4 x white LED lights indicating channel DOWN preselection
- XLR 5-pole OUT Link panel socket
- XLR 5-pole IN Link + REMOTE panel socket
- 2x XLR 4-pole for load cell / limit switch / E-stop
- The unit is supplied with a 1 meter link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

Power Supply:	1 plug CEE 230/400VAC 32A 6H 3 P+N+E with mechanical phase inverter
Outputs:	4 x CEE 400VAC 16A 6H 3 P+E panel sockets
Dimensions:	5U rack box 300mm depth
Weight:	21 kg / 46.3 lbs