

BS series

Full range cabinets

The BS series has been designed to offer an affordable yet reliable series of cabinets which not only deliver high performance but have a sleek & attractive design and finish so that they not only sound great but also look impressive in any install.

The series comprises 4 full range cabinets, all designed for a wide range of applications from fixed installations, nightclubs & bars, houses of worship, corporate events, as front fill and as stage monitoring. The four two-way, passive full range cabinets include a single 8", 10", 12" and 15" with the series offering a tremendous sound and clarity over short/mid distances.



Subwoofers

The series is complemented by two passive subwoofer cabinets in 12" and 18" designed to extend low frequency support to the four BS series full range cabinets.



BS-8



Components	LF: 8" speaker, 2" (50 mm) copper wire voice coil, waterproof cone with treatment on both sides HF: 1" exit throat, (25 mm) voice coil, PETP dome compression driver
Frequency Response	70 Hz - 18 KHz (± 3 dB)
Sensitivity	93 dB
Max. SPL / Peak	118 dB / 124 dB
Rated Power (AES)	300W AES, 600W program, 1200W peak
Dispersion	90° x 60° rotatable
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4, Pin connections: +1 / -1 input, +1 / -1 link
Finish	Polyurea coating
Material	15 mm premium birch plywood
Dimensions	456 x 255 x 259 mm (H x W x D)
Weight	12 Kg (26.4 lbs)
Fittings	5 x M8, single pole-mount, ergonomic handle on the back position
Accessories	U bracket horizontal & vertical, M8 eyebolts, wall bracket
Enclosure type	Multi angle enclosure

BS-12



Components	LF: 12" speaker, 3" (75 mm) copper wire voice coil, waterproof cone with treatment on both sides HF: 1" exit throat, (25.4 mm) voice coil, annular diaphragm driver
Frequency Response	60 Hz - 20 KHz (± 3 dB)
Sensitivity	96 dB
Max. SPL / Peak	122 dB / 128 dB
Rated Power (AES)	400W AES, 800W program, 1600W peak
Dispersion	90° x 60° rotatable
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4, Pin connections: +1 / -1 input, +1 / -1 link
Finish	Polyurea coating
Material	15 mm premium birch plywood
Dimensions	589 x 350 x 348 mm (H x W x D)
Weight	19 Kg (41.8 lbs)
Fittings	5 x M8, double pole-mount with 10° angle, ergonomic handle on the back position
Accessories	U bracket horizontal & vertical, M8 eyebolts, wall bracket
Enclosure type	Multi angle enclosure

BS-112



Components	LF: 12" speaker, 3" (75 mm) copper wire voice coil, waterproof cone with treatment on both sides
Frequency Response	40 Hz - 90 Hz with preset
Sensitivity	93 dB
Max. SPL / Peak	120 dB / 126 dB
Rated Power (AES)	500W AES, 1000W program, 2000W peak
Dispersion	Quasiomnidirectional
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4, Pin connections: +1 / -1 input, +1 / -1 link
Finish	Polyurea coating
Material	15 mm premium birch plywood
Dimensions	406 x 655 x 400 mm (H x W x D)
Weight	29 Kg (63.9 lbs)
Fittings	2 integrated ergonomic handles, 4 rubber feets right side for vertical install, M-10 fly point
Accessories	M-20 connector pole, M-10 eyebolt
Enclosure type	Band pass subwoofer

BS-10

Components	LF: 10" speaker, 2" (50 mm) copper wire voice coil, waterproof cone with treatment on both sides HF: 1" exit throat, (25 mm) voice coil, PETP dome compression driver
Frequency Response	65 Hz - 18 KHz (± 3 dB)
Sensitivity	94 dB
Max. SPL / Peak	119 dB / 125 dB
Rated Power (AES)	300W AES, 600W program, 1200W peak
Dispersion	90° x 60° rotatable
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4, Pin connections: +1 / -1 input, +1 / -1 link
Finish	Polyurea coating
Material	15 mm premium birch plywood
Dimensions	505 x 300 x 301 mm (H x W x D)
Weight	14 Kg (30.8 lbs)
Fittings	5 x M8, single pole-mount, ergonomic handle on the back position
Accessories	U bracket horizontal & vertical, M8 eyebolts, wall bracket
Enclosure type	Multi angle enclosure



BS-15


Components	LF: 15" speaker, 3" (75 mm) copper wire voice coil, waterproof cone with treatment on both sides HF: 1" exit throat, (25.4 mm) voice coil, annular diaphragm driver
Frequency Response	55 Hz - 20 KHz (± 3 dB)
Sensitivity	98 dB
Max. SPL / Peak	124 dB / 130 dB
Rated Power (AES)	400W AES, 800W program, 1600W peak
Dispersion	90° x 60° rotatable
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4, Pin connections: +1 / -1 input, +1 / -1 link
Finish	Polyurea coating
Material	15 mm premium birch plywood
Dimensions	664 x 425 x 420 mm (H x W x D)
Weight	24 Kg (52.9 lbs)
Fittings	5 x M8, double pole-mount with 10° angle, ergonomic handle on the back position
Accessories	U bracket horizontal & vertical, M8 eyebolts, wall bracket
Enclosure type	Multi angle enclosure



BS-118

Components	LF: 18" speaker, 3" (75 mm) copper wire voice coil, waterproof cone with treatment on both sides
Frequency Response	38 Hz - 100 Hz with preset
Sensitivity	98 dB
Max. SPL / Peak	126 dB / 132 dB
Rated Power (AES)	600W AES, 1200W program, 2400W peak
Dispersion	Omnidirectional
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4, Pin connections: +1 / -1 input, +1 / -1 link
Finish	Polyurea coating
Material	15 mm premium birch plywood
Dimensions	533 x 660 x 570 mm (H x W x D)
Weight	33 Kg (72.7 lbs)
Fittings	2 integrated ergonomic handles, 4 rubber feet right side for vertical install, M-10 fly point
Accessories	M-20 connector pole, M-10 eyebolt
Enclosure type	Bass reflex direct radiation subwoofer



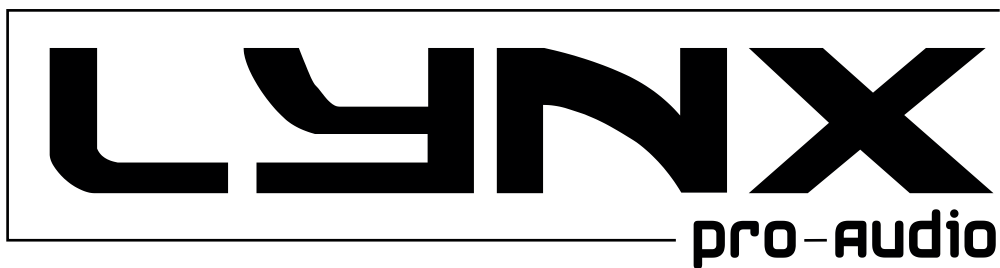

CULTURE OF SOUND

Lynx Pro Audio S.L.
Calle 1 - Pol. Ind. Picassent
46220 Picassent (Valencia)
SPAIN - EU
Tel.: (+34) 961 10 96 01
www.lynxproaudio.com

about us

We are a relatively young company that has been able to quickly establish its product among the best options in the market. We have distributors in more than 36 countries and we export about 80% of our total production.

Our mission is to design the most advanced and innovative sound systems available in the market, with good value for money and using the best components of the market so that our professional audio systems stay the same as the first day.

We fully trust in the ability of our R&D team, responsible for updating and renewing the software and technology of our products.

Follow us on



facebook.com/lynxproaudio



[@lynxproaudio](https://www.instagram.com/@lynxproaudio)



[Lynx Pro Audio](https://www.linkedin.com/company/Lynx-Pro-Audio)



[@lynx_pro_audio](https://www.twitter.com/@lynx_pro_audio)



[youtube.com/lynxproaudio](https://www.youtube.com/lynxproaudio)