

AIR series

AIR series outdoor loudspeakers present superior performance and durability with full sound over a large listening area. Thanks to their elegant style and sturdy structure, they are the ideal speakers for listening to music in the pool, on the veranda or even in the boat. The adjustable mounting brackets supplied, allow to set up them vertically or horizontally, so as to integrate them perfectly into the surrounding environment. The IP46 / IP56 structure (depending on the model) is designed to withstand the rigours of the climate all year round due to the outdoor installation.

- Vertically or horizontally mounted with the brackets /supplied supports
- Tested to withstand snow, rain and salt
- Suitable for use on the boat
- The AIR 2-way full-range loudspeaker with IP46 waterproof protection is ideal for small outdoor or indoor installations and can be used in combination with DAD ARK208 divers.
- Equipped with a transformer for use in 100V systems.
- The polypropylene cabinet guarantees complete protection against ultraviolet rays.
- The grid is in perforated aluminium, internally covered in waterproof fabric and open cell expanded polyurethane.
- The PROAUDIO logo can be rotated for vertical or horizontal installation.



AIR04T



BK



WH

2-way passive loudspeaker, 50W AES, 109dB SPL

LOUDSPEAKERS

- System type: passive 2 way

COMPONENTS

- Low frequency: 4" woofer/1"v.c.
- High frequency: 1" dome tweeter/0.8"v.c.

FEATURES

- AES/program power: 50/100W
- Input 100 V: 12.5/25/50W
- SPL max: 109dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 88dB
- Impedance: 16
- SPL cont/peak: 103/109dB
- Frequency response: 75-20.000Hz
- Coverage angle HxV: 120x90°
- Cross over frequency: 3500Hz
- Protection: H.F. signal compression
- Suggest HPF range: 160/180Hz
- Recommended amplifier up to: 200W

INPUT/OUTPUT CONNECTORS

- Input signal: Phoenix IN/OUT

CABINET CONSTRUCTION

- Cabinet material: polypropylene
- Sospension system: wall brackets (included)

PHYSICAL

- IP rating: 46 for outdoor events
- Dimensions (WxHxD): 141x230x170mm
- Weight: 3.2kg



AIR04X



BK



WH

2-way passive loudspeaker, 50W AES, 109dB SPL

LOUDSPEAKERS

- System type: passive 2 way

COMPONENTS

- Low frequency: 4" woofer/1"v.c.
- High frequency: 1" dome tweeter/0.8"v.c.

FEATURES

- AES/program power: 50/100W
- SPL max: 109dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 88dB
- Impedance: 16
- SPL cont/peak: 103/109dB
- Frequency response: 75-20.000Hz
- Coverage angle HxV: 120x90°
- Cross over frequency: 3500Hz
- Protection: H.F. signal compression
- Suggest HPF range: 160/180Hz
- Recommended amplifier up to: 200W

INPUT/OUTPUT CONNECTORS

- Screw terminal IN/OUT: phoenix


CABINET CONSTRUCTION

- Cabinet material: polypropylene
- Sospension system: wall brackets (included)

PHYSICAL

- IP rating: 46 for outdoor events
- Dimensions (WxHxD): 141x230x170mm
- Weight: 2.6kg


AIR04T / AIR04X - Technical Drawings

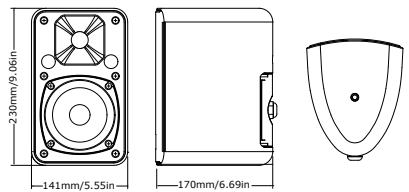

Optional accessories

AIRWB46: Wall-mount ABS support for AIR04/AIR06 acoustic speakers.


AIR06T / AIR06X - Technical Drawings

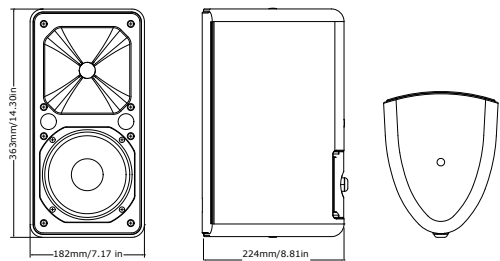

Optional accessories

AIRWB46: Wall-mount ABS support for AIR04/AIR06 acoustic speakers.

AIR08T / AIR08X - Technical Drawings

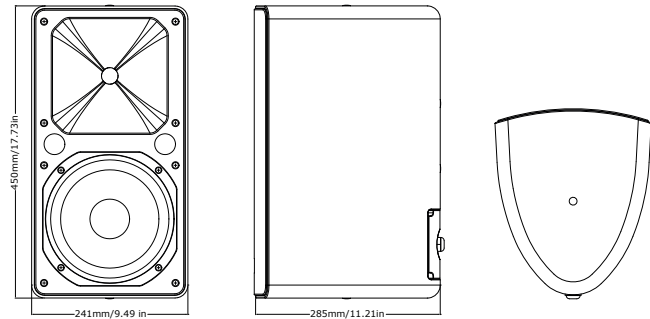

Optional accessories

AIRWB80: Wall-mount metal support for AIR08 acoustic speakers.

AIR08TCOAX - Technical Drawings

