




WIFIUSB (optional) LUMIPARIRCH (optional)

## LUMIPIX12UT

LUMIPIX12UT is a linear colour changer fitted with luminous high-efficiency 12x3W RGB LED. The management system is fully customisable in line with the user requirements, from 3 to 41 channels management mode pixel control and for the independent control of each individual LED. LUMIPIX12UT offers advanced capabilities for effects generation such as video or LED arrays-activated music. LUMIPIX12UT can be also controlled wireless through the optional USB WIFI transceiver in combination with WIFIBOX and SmartColor app.

- Source: 12x3W RGB LEDs
- Luminous flux: 1247lm
- Beam angle: 15°
- Colour mixing: RGB/FC
- Colour wheel: virtual colour wheel with presets
- Sound mode: music activation through internal microphone and sensitivity control
- Protocols: DMX512
- DMX channels: 3/4/6/7/8/9/12/18/36/41channel
- Pixel control: pixel2pixel control
- IR: infrared sensor controlled by remote
- Power consumption (at 230V): 50.5W
- Output (at 230V): 47 units on a single power line
- Data: USB port for USB WIFI transmitter (optional)
- Signal connection: XLR 3p IN/OUT connectors
- Power connection: IEC IN/OUT connectors
- IP rating: 33
- Dimensions (WxHxD): 987x49x157mm
- Weight: 2.8kg

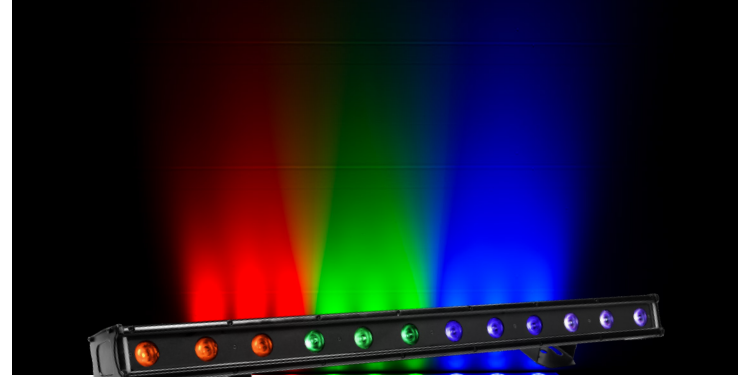

## LUMIPIX12TRIIP

LUMIPIX12TRIIP is a 1 m long outdoor linear colour changer equipped with 12 high-efficiency RGB/full colour LED (3W each). The control system is fully customisable allowing pixel control and independent selection of each LED from 3 to 36 channels. LUMIPIX12TRIIP offers advanced possibilities in effect generation as LED video or sound activated arrays.

- Source: 12x3W RGB LEDs
- Beam angle: 16°
- Colour mixing: RGB/FC
- Colour wheel: virtual colour wheel with presets
- Protocols: DMX512
- DMX channels: 3/4/6/7/9/12/18/36 channel
- Pixel control: pixel2pixel control
- Power consumption (at 230V): 40W
- Output (at 230V): 16 units on a single power line
- Signal connection: moulded IP signal IN/OUT connectors
- Power connection: moulded IP power IN connector
- IP rating: 67
- Dimensions (WxHxD): 993x100x173mm
- Weight: 6.5kg