

PanoramaIP AirBeam

440 W IP65 moving beam light with colour mixing

ORDER CODE: PANORAMAIPAB



PanoramaIP AirBeam is a stunning IP65 moving beam light which delivers an unbelievable bright, fat 2° beam ideal for an outdoor searchlight and big air look. Designed to make a statement, the **PanoramaIP** AirBeam can truly make an event stand out or fill a large outdoor space with spectacular beams.

MAIN FEATURES

- Powerful 440 W S Osram HTI lamp combined with 167 mm HD front lens for bright 2° beam
- IP65 rated for temporary outdoor application, not for fixed installation
- Extensive set of effects including linear CMY mixing, rotating gobo wheel, static gobo wheel, circular and linear prisms, linear frost and focus

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 440 W S Osram Sirius HRI
- CT: 7.000 K
- CRI: 80
- Luminous flux: 12'457 lm
- Lux: 1'270'259 lx @5 m
- Lux: 317'565 lx @10 m
- Source life expectancy: 1.500 h

OPTICS

- Beam angle: 2°
- Lens diameter: 167 mm
- Lens type: high-quality glass lens optics
- Focus: motorised with auto-focus

COLOUR SYSTEM

- Colour mixing: CMY colour system on 3 gradually fading colour wheels
- CTC: on wheel 2500 K and 3200 K + CTB
- Colour wheel: 13 dichroic filters + open on 3 independent colour wheels

DYNAMIC EFFECTS

- Rotating gobos: 9 rotating gobos + open, interchangeable, indexing
- Gobo size: outer: 15,8 mm - image: 9 mm - thickness: 0,3 mm
- Fixed gobos: 15 fixed gobos + open
- FX generator: prisms overlap for spectacular aerial effects
- Circular prism: 16 f with bi-directional rotation, indexing
- Linear prism: 6 f with bi-directional rotation, indexing
- Frost: linear 0 - 100% frost filter

BODY

- Pan angle: 630° - 540°
- Tilt angle: 230°
- Pan/Tilt resolution: 16 bit
- Feedback: automatic repositioning after accidental movement
- Body: aluminium structure with hi-resistance polycarbonate cover
- Body colour: black

CONTROL

- Protocols: DMX512, RDM, Art-Net, W-DMX
- DMX channels: 19 / 22 / 28 channel
- W-DMX: included, wireless solution receiver
- RDM: RDM ready for fixture remote monitor and settings
- Display: LCD high resolution colour display with autoflip
- Firmware upgrade: via menu with internal memory or via USB - DMX interface (UPBOX2) not included
- Hibernation: power safe mode when lost DMX

ELECTRONICS

- Dimmer: linear 0 ~ 100% mechanical dimmer
- Strobe / shutter: 1 - 28 flash(s), mechanical
- Operating temperature: -20° ~ +40°

ELECTRICAL

- Power supply: 100-240 V – 50/60 Hz
- Power consumption (at 230 V): 522 W
- Power consumption (at 120 V): 522 W

PHYSICAL

- Cooling: forced air with low noise fan
- Suspension and fixing: any position with quick-lock omega brackets
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Data connection: Art-Net RJ45 IN/OUT
- Power connection: Neutrik powerCON TRUE1 IN connector
- IP rating: 65 for temporary outdoor application, not for fixed installation
- Dimensions (WxHxD): 441x746x327 mm
- Weight: 39 kg


ACCESSORIES & RELATED PRODUCTS

- FCLP440AB: Flight case for 2x PANORAMAIPAIRBEAM
- UPBOX2: Firmware uploader kit, USB IN, 3-pin XLR DMX OUT


- OSIP: IP65 quick-lock omega bracket compatible with IP65 moving heads

COLOUR PRESET FULL ON

Beam angle 2°

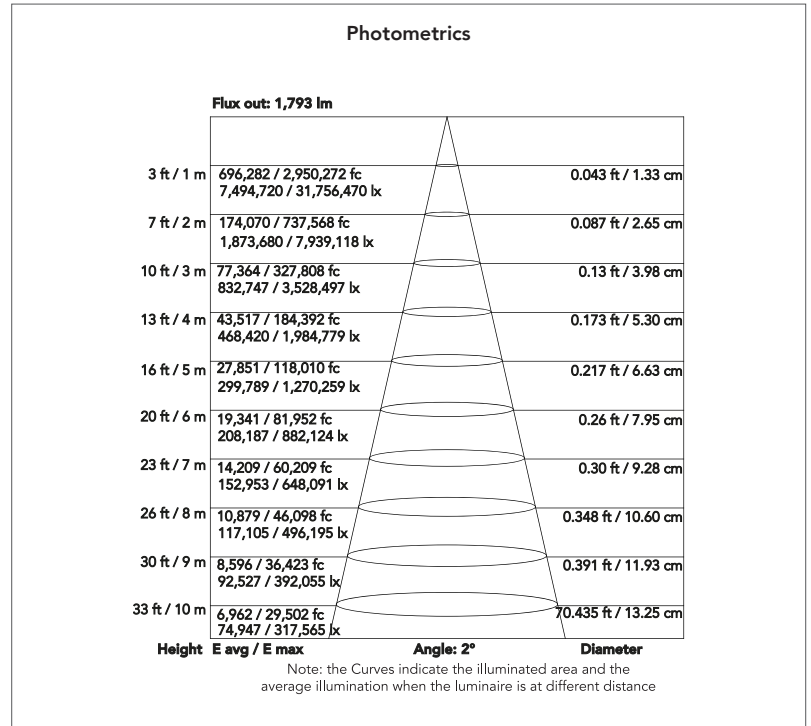

TECHICAL DRAWINGS

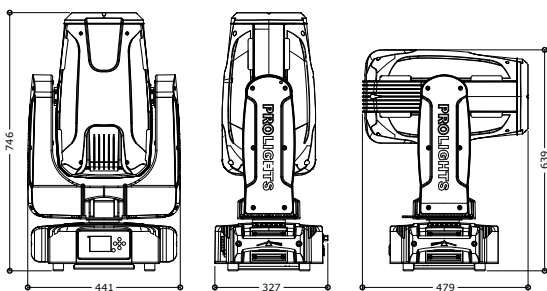

PROLIGHTS is a trademark of
MUSIC & LIGHTS S.r.l.
musiclights.it

Via A. Olivetti snc
04026 - Minturno (LT) ITALY
Tel: +39 0771 72190



For more product
info and downloads
visit our website



prolights.it
info@prolights.it