

Product datasheet

HO 54 W/940

LUMILUX DE LUXE T5 HO | Tubular fluorescent lamps 16 mm, high output, with G5 base

- Industry Shops Supermarkets and department stores
Ideal where color rendering is an important factor



- Excellent color rendering Natural colors Perfect color matching
- Product features Very good color rendering group: 1A ($R_a \geq 90$) Very good lumen maintenance: 90 % throughout the service lifetime of the lamp Long average lifetime: up to 24,000 h (with QUICKTRONIC® ECG) DimmableProduct benefits Excellent color rendering Natural colors Perfect color matchingAreas of application Industry Shops Supermarkets and department stores Ideal where color rendering is an important factorSystem guaranteeOSRAM System+ Guarantee in combination with OSRAM ECGsSafety adviceIn case of lamp breakage: www.ledvance.com/brokenlampReferences / LinksFor more information on the system guarantee and the terms and conditions of the guarantee visit www.ledvance.com/system-guarantee



Technical data

Electrical data

Nominal voltage	120 V
Nominal wattage	54.00 W
Rated lamp efficacy (HF data 25 °C)	66 lm/W
Rated wattage	54.10 W

Photometrical data

Color rendering index Ra	≥90
Rated luminous flux	3800 lm
Luminous flux at	3800 lm
Luminous flux at	4250 lm
Light color	940
Rated color temperature	4000 K
Nominal luminous flux	3800 lm
Light color (designation)	LUMILUX DE LUXE Cool White
Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.93
Rated LLMF at 6,000 h	0.92
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.90
Rated LLMF at 16,000 h	0.90
Rated LLMF at 20,000 h	0.89

Dimensions & weight



Tube diameter	16 mm
Length	1149 mm
Length with base excl. base pins/connection	1149.00 mm

Product datasheet

Diameter	16.0 mm
----------	---------

Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	35.0 °C
--	---------

Lifespan

Service life	19000 h ¹⁾
Lifespan	24000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.97
Rated lamp survival factor at 20,000 h	0.85
Operation mode LLMF/LSF	HF
Rated lamp life time	24000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	G5
Mercury content	1.7 mg
Product remark	Suitable for ECG operation only/Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C
Appropriate disposal acc. to WEEE	Yes

Capabilities


Suitable for indoor	Yes
---------------------	-----

Certificates & standards

Energy efficiency class	A
Energy consumption	60 kWh/1000h

Product datasheet

Light Distribution

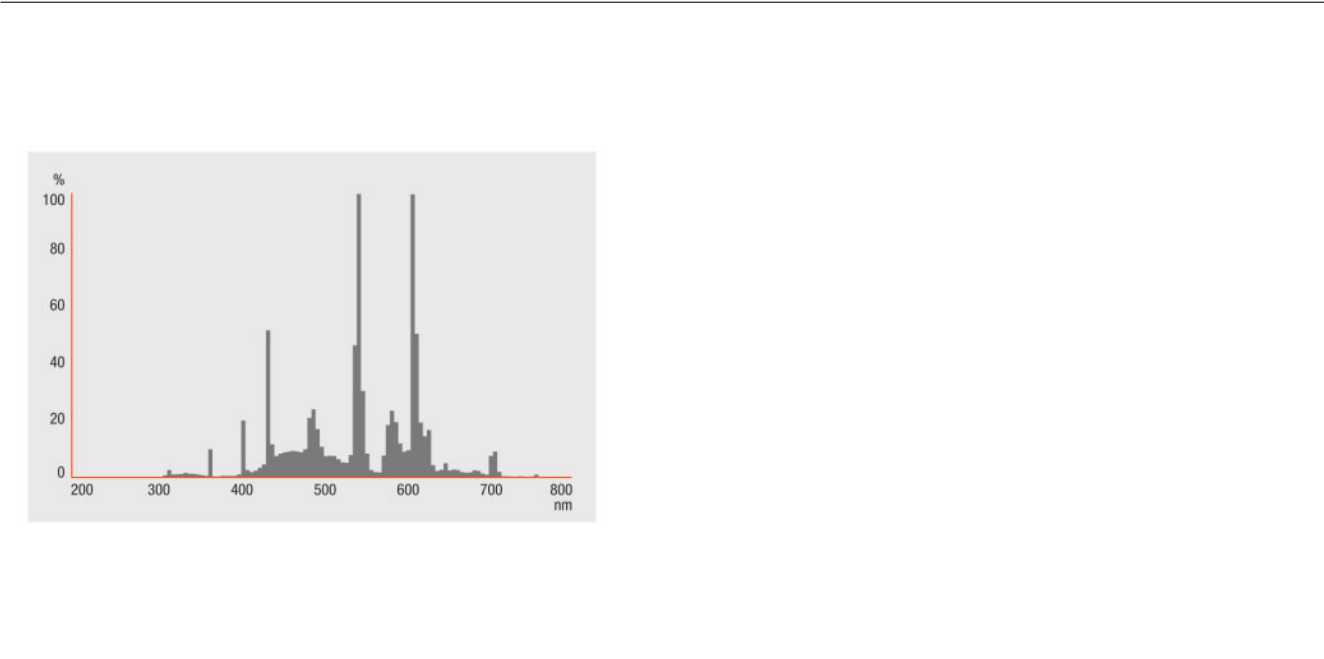

Spectral power distribution

System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321233929	HO 54 W/940	Shipping carton box 10 Pieces Sleeves	1182 mm x 104 mm x 42 mm	5.16 dm ³	1440.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit
▶ www.osram.com/system-guarantee

For more information on QUICKTRONIC electronic control gear go to
▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany