


LTECH

DMX512 DECODER

LT-924-OLED

24



OLED display
8 bit / 16 bit
4 kinds of DMX interfaces
Dimming Curve: 0.1-9.9
Short circuit/Over current/Over-heat protection

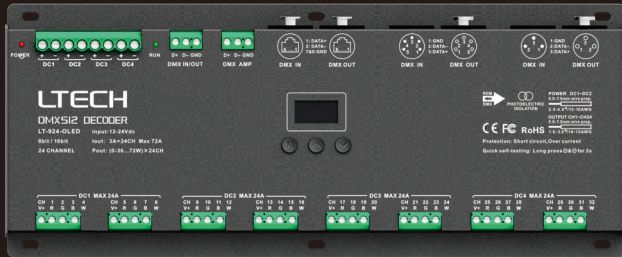

www.ltech-led.com

Product introduction

1. Designed for Hi-power multiple channels application, 24 channels output, and Max. 3A current per channel, up to 1728W output power.
2. Easy operation with OLED screen and touch buttons.
3. 3 kinds of mode optional: single color, color temperature and RGB
4. Support 4 kinds of DMX ports with signal isolation function: 3-pin XLR, 5-pin XLR, RJ45 and green terminal (with signal amplifier function).
5. With RDM remote management protocol, the operations can be completed via the RDM master console, such as parameters browsing & setting, DMX address setting, equipment recognition, etc.
6. With firmware upgrade function.
7. With short circuit, over current and over-heat protection, as well as warning function when fault.
8. With power-on state management and fast self-testing function.
9. 16bit (65536 levels) / 8bit (256 levels) grey level optional.
10. Optional for standard, linear, LOG or custom 0.1-9.9 dimming curve.

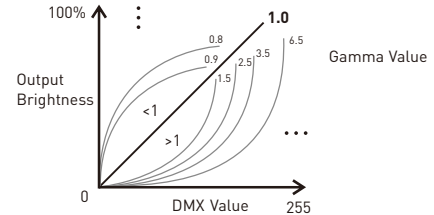


Technical specs:

Model :	LT-924-0LED
Input Signal :	DMX512/RDM
Input Voltage :	12-24Vdc
Current Load :	3A × 24CH Max 72A
Output Power :	(0-36W...72W) × 24CH Max. 1728W
DMX Interface :	3-pin XLR, 5-pin XLR, RJ45, Green terminal
Control Mode :	Dimming/CT/RGB
Dimming Curve :	0.1-9.9
Grey Level :	8bit (256 levels) / 16bit (65536 levels)
Photoelectric Isolation :	Yes
Protection:	Short circuit / Over current / Over-heat
Working Temperature :	-30°C-65°C
Dimensions :	L300×W122×H39mm
Package Size :	L313×W127×H41mm
Weight (G.W.) :	1180g






Product size

Unit: mm

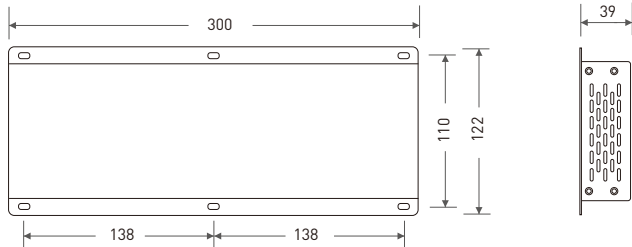

Main component description:

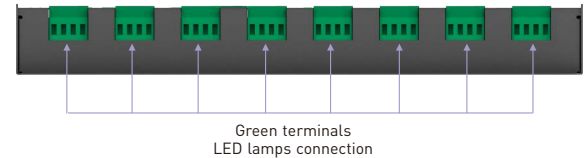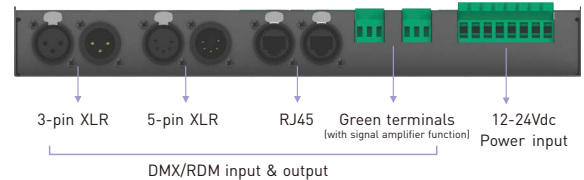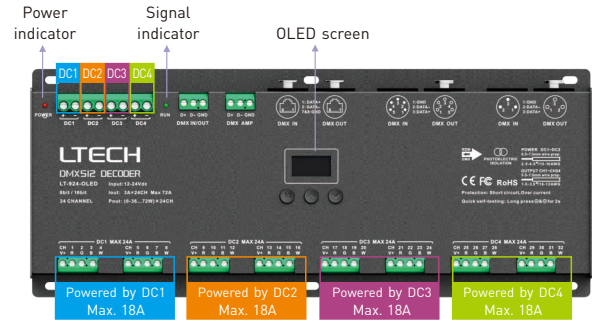


OLED screen interface:



Press "M" key, switch entries.
 Long press "M" key, back to main page.
 Press "^" or "v" key, parameter adjustment.
 Exit: back to previous page.

1. DMX address setting



Main page

Press "^" or "v" key to set DMX address.
 Range: 001-512


2. PWM frequency



Press "^" or "v" key to choose. **No flicker in video camera.**
 Optional : Std (standard) High Mid (middle) Low

Smooth and exquisite, human eye is comfortable. * It is recommended to use standard.

3. Mode




Press "^" or "v" key to choose.
 Optional : Dim CT RGB

4. Grey scale




Press "^" or "v" key to choose.
 Optional : 8bit 16bit (choose it if the master controller support this function)

5. Dimming curve



Press "^" or "v" key to choose.
 Optional : Standard Linear LOG 0.1-9.9
 It is recommended to use standard, 0.1-9.9 is for special requirements.

6. Enhance Dimming






Press "^" or "v" key to choose.

Optional : Std (standard) Smo (smooth)


* It is recommended to use standard.

Smo: This option with smooth processing, realize the dimming flicker-free and dynamic effects more downy.

7. Tool



Brightness setting (range: 0-255)
 Press "^" or "v" to next page
 Press "v" to exit



Change all value simultaneously (on the last page)



Screen: ON+Addr
 Screensaver open and display address if undo for 2 minutes.



Screen: ON+black
 Screensaver open and black if undo for 2 minutes.





Screen: OFF
 Screensaver not enable.


* Fast self-testing function: press "^" or "v" keys simultaneously for 2-3 seconds under any page, decoder will enter self-testing function.

Wiring diagram

1 Connecting LED lights:

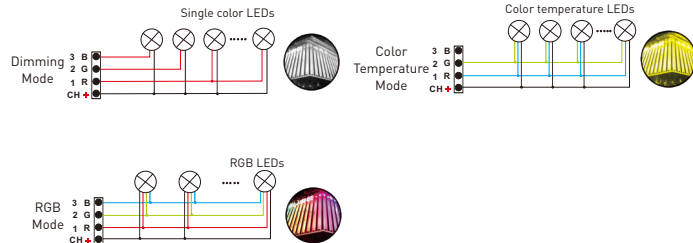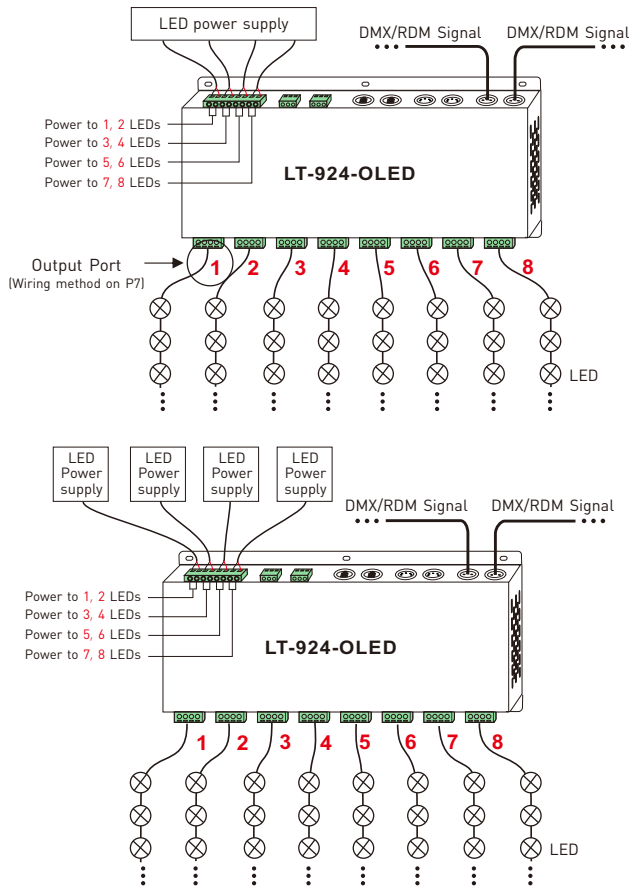


2. DMX console connection:

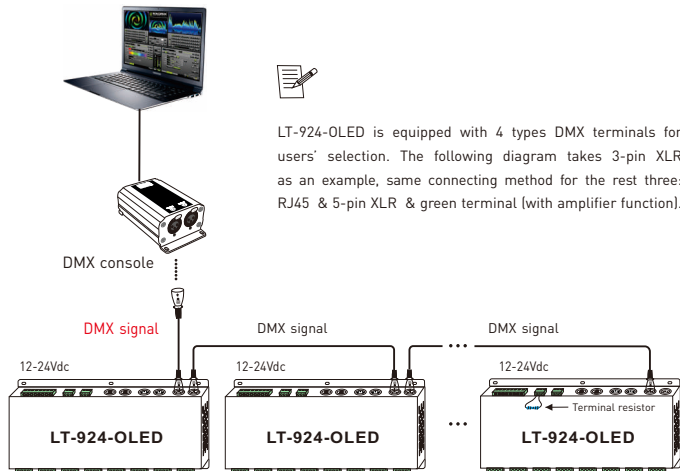

* If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each line.

3. The connection diagram of 4 kinds of DMX/RDM terminals:

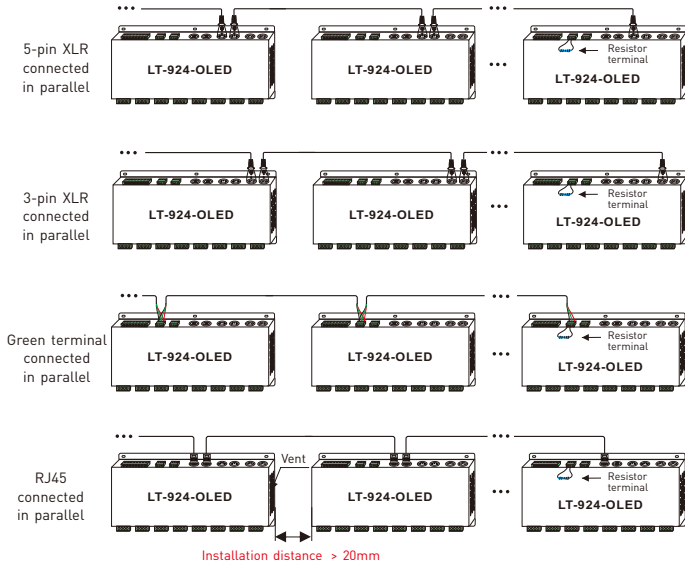


These 4 terminals can be connected in a mixed way.

*** Installation Attention :** please reserve enough ventilation distance between decoders (>20mm), be sure not to block the vent, or will affect lifetime of decoder for poor heat dissipation.

4. The connection diagram of AMP signal amplifier terminal:

*** Connecting with green terminal or an extra amplifier will be needed when more than 32 decoders are connected or use overlong signal wire (as shown below). Signal amplifier should not be more than 5 times continuously.**





Address setting table

Mode	DIM	CT	RGB	
Address Quantity	8	16	24	
Resolution	8bit	8bit	8bit	
Channel	1	001	001	001
	2	001	002	002
	3	001	002	003
	4	002	003	004
	5	002	004	005
	6	002	004	006
	7	003	005	007
	8	003	006	008
	9	003	006	009
	10	004	007	010
	11	004	008	011
	12	004	008	012
	13	005	009	013
	14	005	010	014
	15	005	010	015
	16	006	011	016
	17	006	012	017
	18	006	012	018
	19	007	013	019
	20	007	014	020
	21	007	014	021
	22	008	015	022
	23	008	016	023
	24	008	016	024

Mode	DIM	CT	RGB	
Address Quantity	16	32	48	
Resolution	16bit	16bit	16bit	
Channel	1	001 002	001 002	001 002
	2	001 002	003 004	003 004
	3	001 002	003 004	005 006
	4	003 004	005 006	007 008
	5	003 004	007 008	009 010
	6	003 004	007 008	011 012
	7	005 006	009 010	013 014
	8	005 006	011 012	015 016
	9	005 006	011 012	017 018
	10	007 008	013 014	019 020
	11	007 008	015 016	021 022
	12	007 008	015 016	023 024
	13	009 010	017 018	025 026
	14	009 010	019 020	027 028
	15	009 010	019 020	029 030
	16	011 012	021 022	031 032
	17	011 012	023 024	033 034
	18	011 012	023 024	035 036
	19	013 014	025 026	037 038
	20	013 014	027 028	039 040
	21	013 014	027 028	041 042
	22	015 016	029 030	043 044
	23	015 016	031 032	045 046
	24	015 016	031 032	047 048

Work with RDM editor


LT-924-OLED can work with LTECH RDM editor (Model: WiFi-RDM01) to realize changing the parameters by long-range setting, wiring diagram as below:

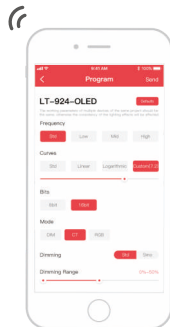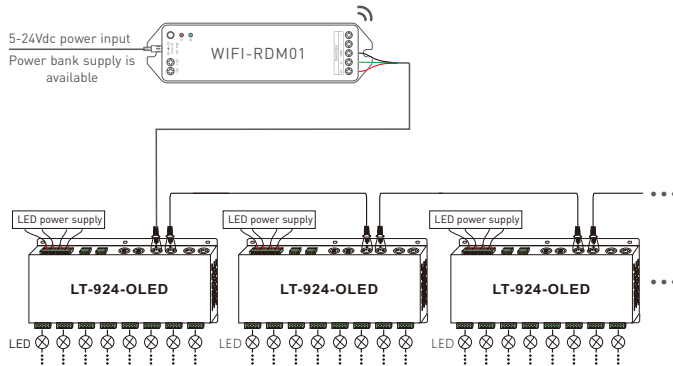

RDM editor App interface instruction

Download the App, setting the LT-924-OLED parameters (frequency, bit, curve, modes, dimming range, screensaver, etc.) after well connecting the RDM editor, more details, please check the manual of WiFi-RDM01.

Well installation of products first, then working with WiFi-RDM01 to realize setting parameters and firmware upgrade by App.

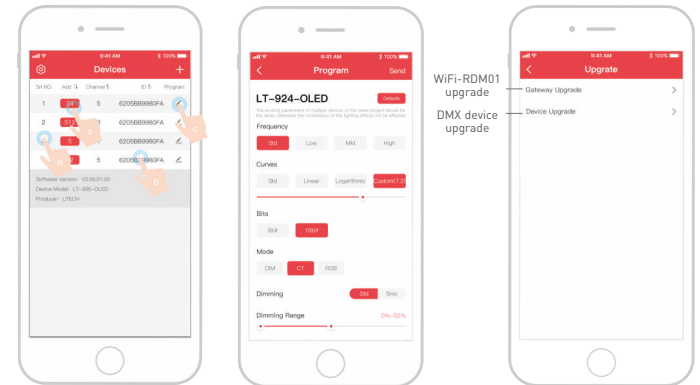

- click "Add", edited the address in corresponding box.
- Click "ID", get more product details.
- Click "ID", enter edited interface
- Click "No.", issue the recognizing command.

Supporting WiFi-RDM01 upgrade and DMX driver upgrade.