


● Warning And Notes

1. The environment should be kept dry and ventilated when using the light.
2. Please do not let the device be exposed to rain or moisture, to avoid circuit problem.
3. Please do not use the light with over- rated voltage.
4. It's normal the fixture will be a little hot when working.
5. During transportation and installation process, please do not hit against other items, or else it may cause deformation to the lamp shade and damage to the light.
6. Please do not directly look at the light bulb with naked eyes when the light is on.
7. Please do not place the light near by such as alcohol or gasoline and other flammable or volatile solvents.
8. Please use the soft dry cloth to clean the light. You can wash with a cloth with some neutral detergent to remove the dirt that is difficult to remove, and then dry with a soft cloth.
9. Keep the light out of reach from children.
10. Please do not work when over-current.
11. Do not disassemble equipment. Touch the product's internal part could result in injury. In the event of malfunction, the product should be repaired only by a qualified technician.
12. Please cut off power when the light isn't used for long time.
13. Please note the precautions, or could result in injury.



SBL Kompakt 36W LED lys

SKU:156795

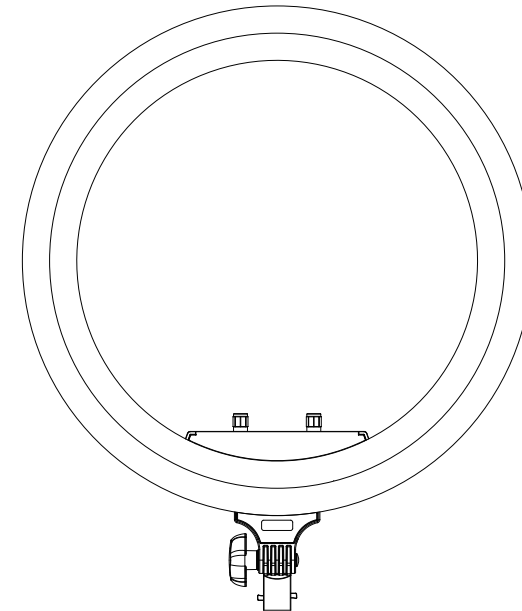


● Product Information

The bi-color 19" LED Ring Light is an ideal way to achieve soft, nearly shadowless light quality that's flattering to skin, makeup, and close-up portraiture. The gimbal can be mounted on the light fixture with the L bracket, and the handle mounts allow you to handheld the light while shooting in the middle of it. You may recharge your smartphone via the 5V2A USB port while shooting. The light intensity from 10-100% is controlled by a simple knob and color temperature is adjustable from 3000K-6500K. The fixture has dual power design, it comes with UL certified power adapter and accept 110V-240V voltage, and the battery mounts accept Sony type NP-F750/960 batteries.

● Model Parameter List

Output Power	36W
Luminous Flux	2500LM
LED Quantity	240 pcs
Color Temperature	3000K-6500K
Dimmer	10%-100%
Light Source	0.2W high brightness Smd LED
DC power input	DC 15V 2.4A
Color Reading Index	≥85
Size	Outer diameter 487mm, Inner diameter 435mm, Thickness 46.6mm

● Overview

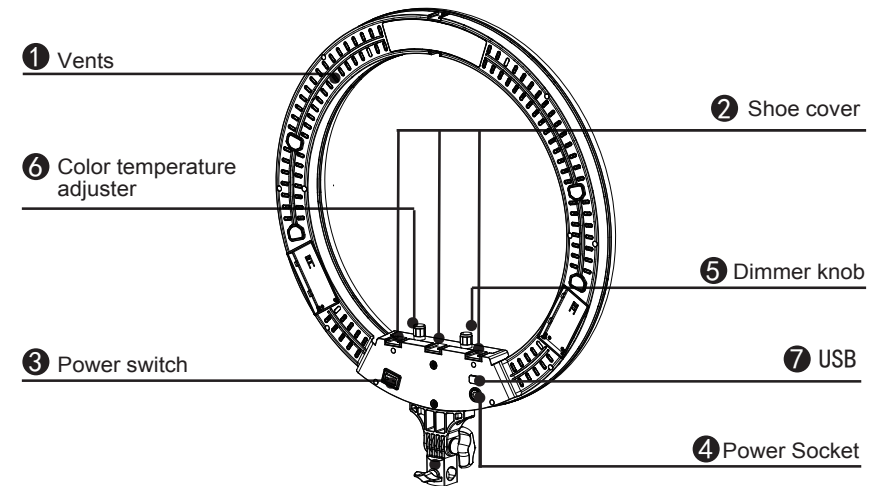

① Vents

② Shoe cover

③ Power switch

④ Power Socket

⑤ Dimmer knob

When turned on, the brightness range is 10-100%.

⑥ Color temperature adjuster

When turned on, the CCT range is 3000-6500K.

⑦ USB