


SBL Mini 50TW Fresnell

Photometric


WW(lx)	6419	2986	946	543	352	240
CW(lx)	8804	2843	1312	759	495	329
Full on(lx)	7063	2216	1069	610	396	270

WW(lx)	1955	602	291	165	114	80
CW(lx)	2688	866	395	230	155	110
Full on(lx)	2150	698	319	185	126	90

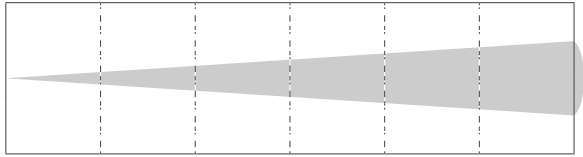

Distance(m)	1	2	3	4	5	6
Spot Diam(m)	0.50	1.00	1.50	2.00	2.50	3.00


Min. Spot

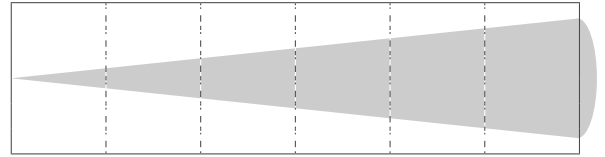


Distance(m)	1	2	3	4	5	6
Spot Diam(m)	1.25	2.5	3.75	5	6.25	7.5

Max. Spot

Color Rendition

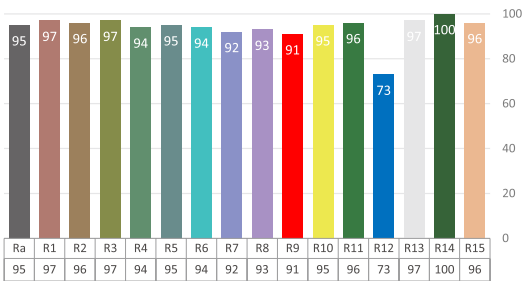

Spectrum

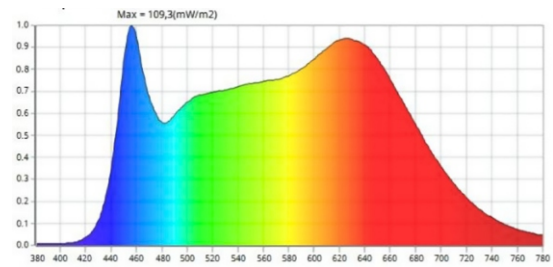

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	50W WW + 50W CW
Color temperature:	2700K~6500K tunable
Zoom range:	25°- 80° manual zoom
Color Rendition:	CRI 95, R9≥90, TLCI 98, CQS 96
Power connection:	PowerCON in
Signal connection:	3-pin XLR in&out(5-pin optional)
Control channels:	1/2/3/5
Control mode:	DMX, RDM, Rotary

Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
Package(carton):	335 x 218 x 220mm
N.W.:	2.2 kg(barn door incl.)
G.W.:	2.8 kg
Accessories(incl.):	Power cable, barn door, Gel frame
Accessories(opt.):	Clamp, Safety rope
Compliance:	CE
Environment:	IP20

