

# DTW 2216 LED STRIP

## Applications

- Cove lighting
- Backlight/edge lighting for signage
- Architectural lighting for corridor, canopy, archway
- Path and contour lighting
- Decorative lights for holiday, event, show, exhibitiong
- Suitabte for cove and contour lighting etc. in KTV, hotel, shopping mall, home, cabinet and so on

## Features


- Dim to warm, CCT gets warmer when brightness goes down
- CCT range: 1800K-3000K, 3000K-6000K
- One bin selection, SDCM≤3
- High CRI, Ra90
- Compatible with 0/1-10V, PWM, Triac constant voltage driver and dimmer
- IP rating: IP20, IP65, IP67, IP68
- Certification: CE, RoHS

## Installation



- Easy installation with double-sided adhesive tape
- May installation and fixing options available with the minimum bending diameter as 5cm

## Warranty

- 2 years


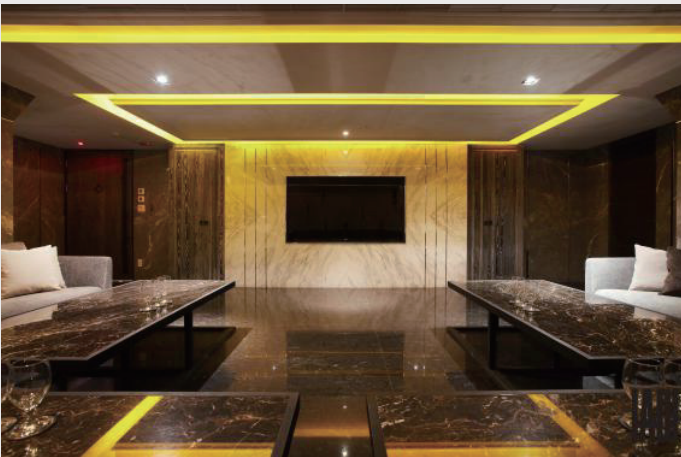


P/N	Color	Color temperature(K) Wavelength(nm)	LED Qty (pcs/m)	Luminous Flux(lm/m)	Power(W/M)	Luminous Efficaly(lm/w)	CRI	Working Voltage(V DC)	Standard Length(m)	Beam Angle(°)
KD-2216-224DTW	Warm White	1800K	224	28	0.48	58	≥90	24	5	120
KD-2216-224DTW	Warm White	3000K	224	1083	15	72	≥90	24	5	120

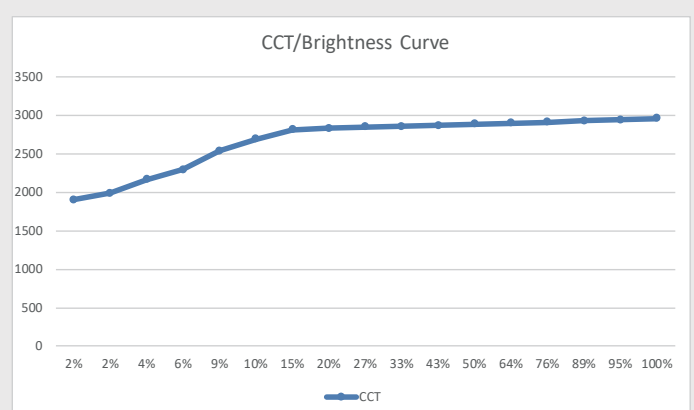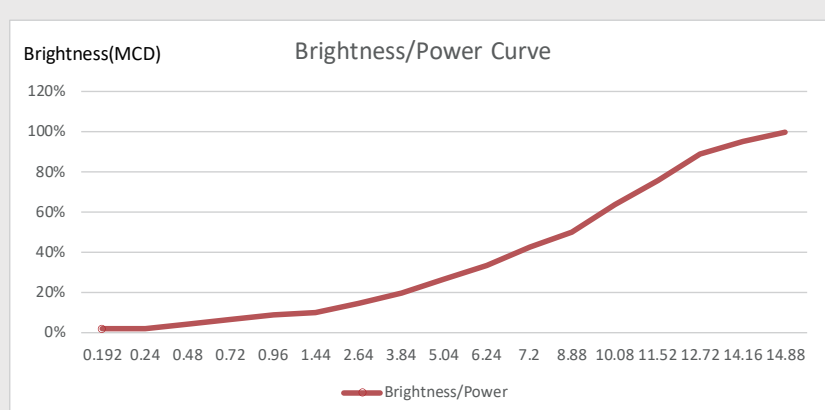

# Build the light light your life


P/N	Color	Color temperature(K) Wavelength(nm)	LED Qty (pcs/m)	Luminous Flux(lm/m)	Power(W/M)	Luminous Effically(lm/w)	CRI	Working Voltage(V DC)	Standard Length(m)	Beam Angle(°)
KD-2216-224DTW	Warm White	3000K	224	34	0.48	71	≥90	24	5	120
KD-2216-224DTW	White	6000K	224	1152	15	72	≥90	24	5	120

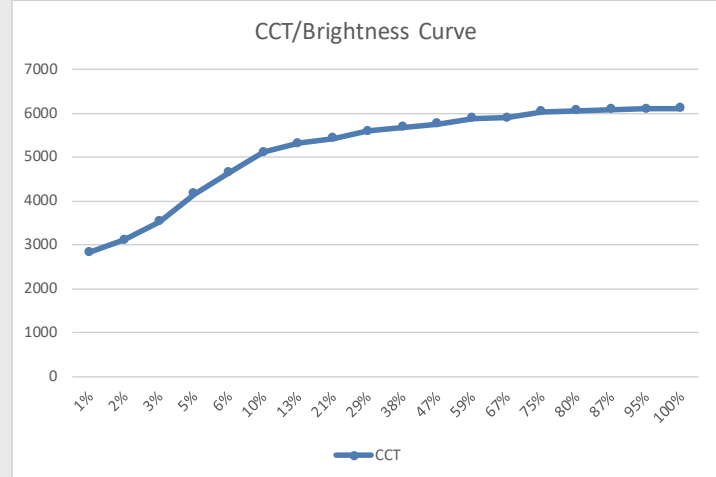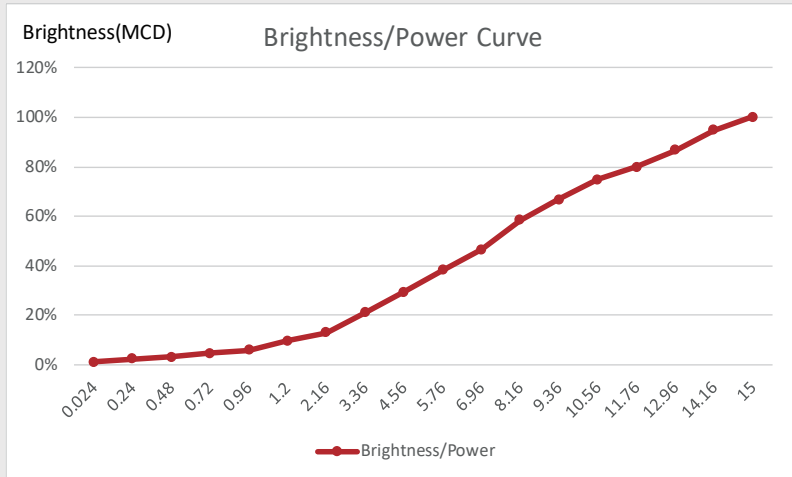

## Notes


- Testing environment temperature: 25±2 °C [77±3.6 °F]
- The above data are typical values; the actual data of each single product could differ from the typical values. The data subject to change without prior notice
- The above luminous flux is based on the monochromatic strip
- Bending radius ≥5cm, not suitable for channel letter application

## Waterproof Options

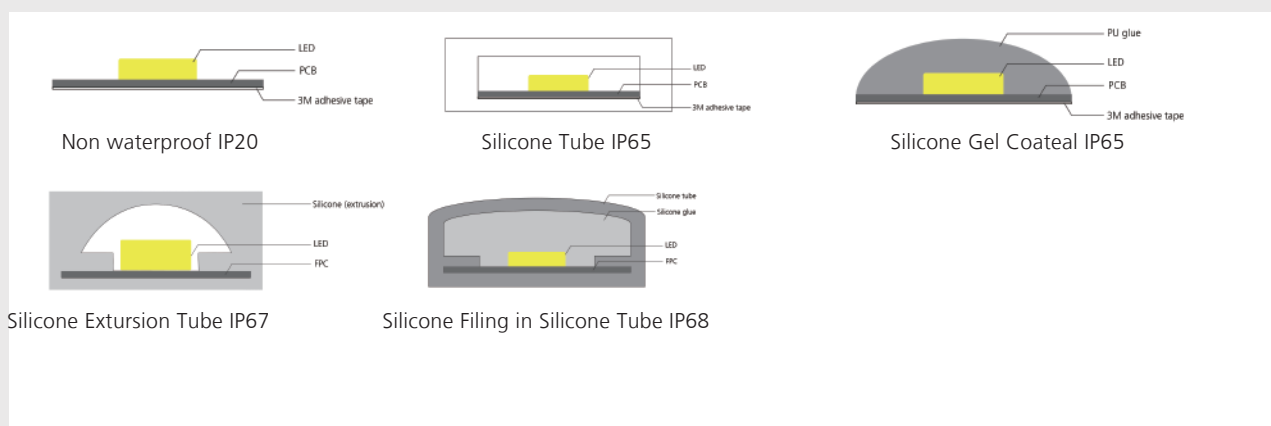


## Profile Drawings


Unit: mm [in]

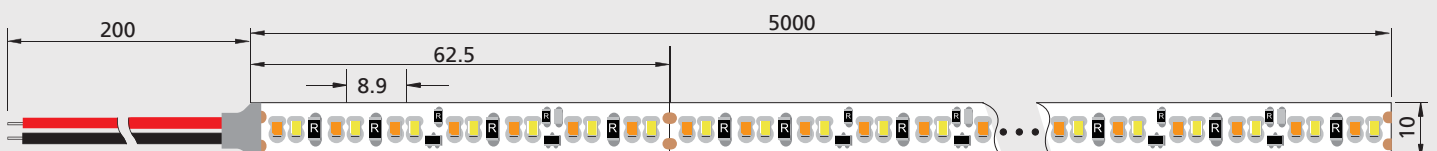

## Schematic

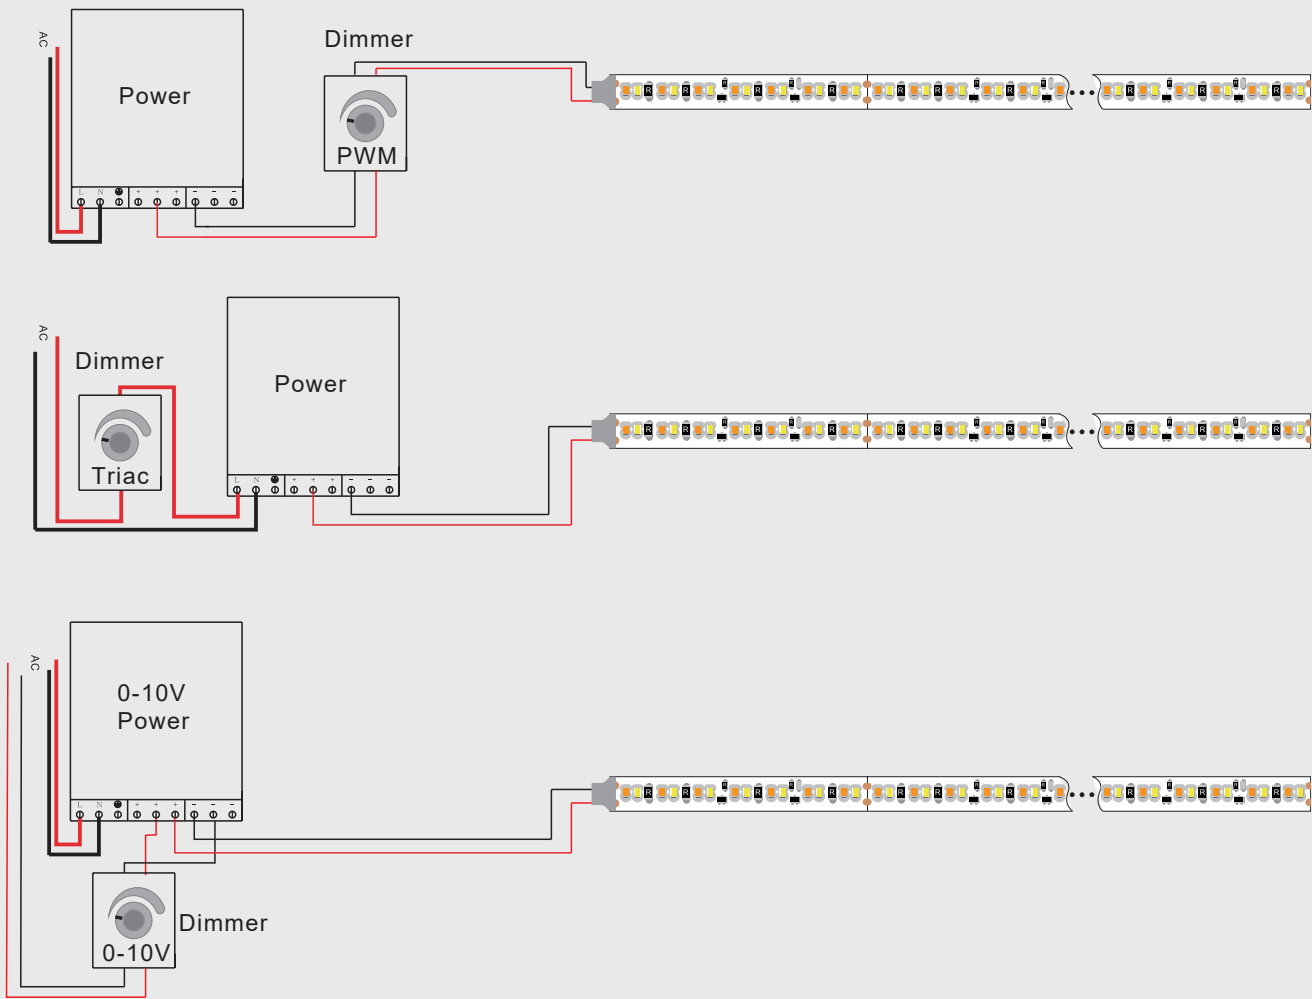

## Packing Diagrams

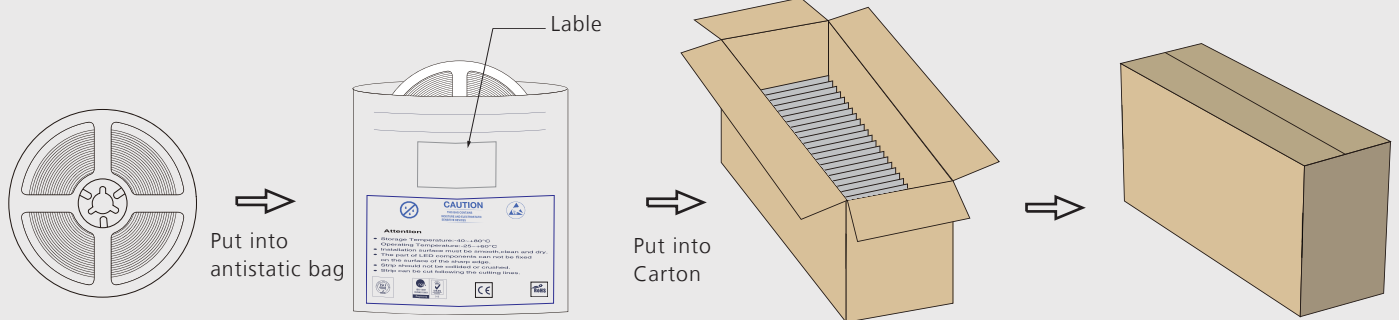

## Packing Information

Model	Carton size	Length/bag	Qty/carton	Net weigh	Gross weight
KD-2216-224DTW	47*31*28cm	5m	60 bags	6.7 kg	7.7 kg