



LU-BW-100

RGBW FLAT COVER STEALTH BLACK


LUMINAIRE PHOTOMETRIC TEST REPORT

Eff: 1.84 lm/W


Imax (cd) 12.90

Total Flux 25.771

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

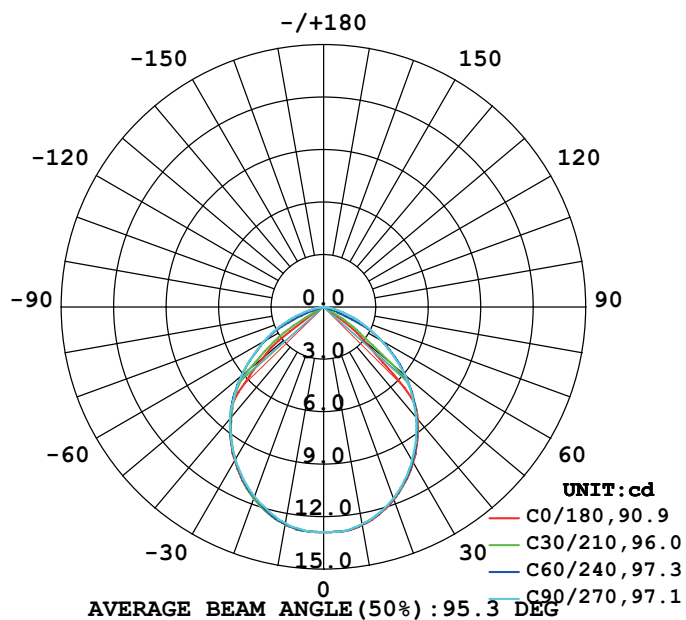

ISOCANDELA DIAGRAM

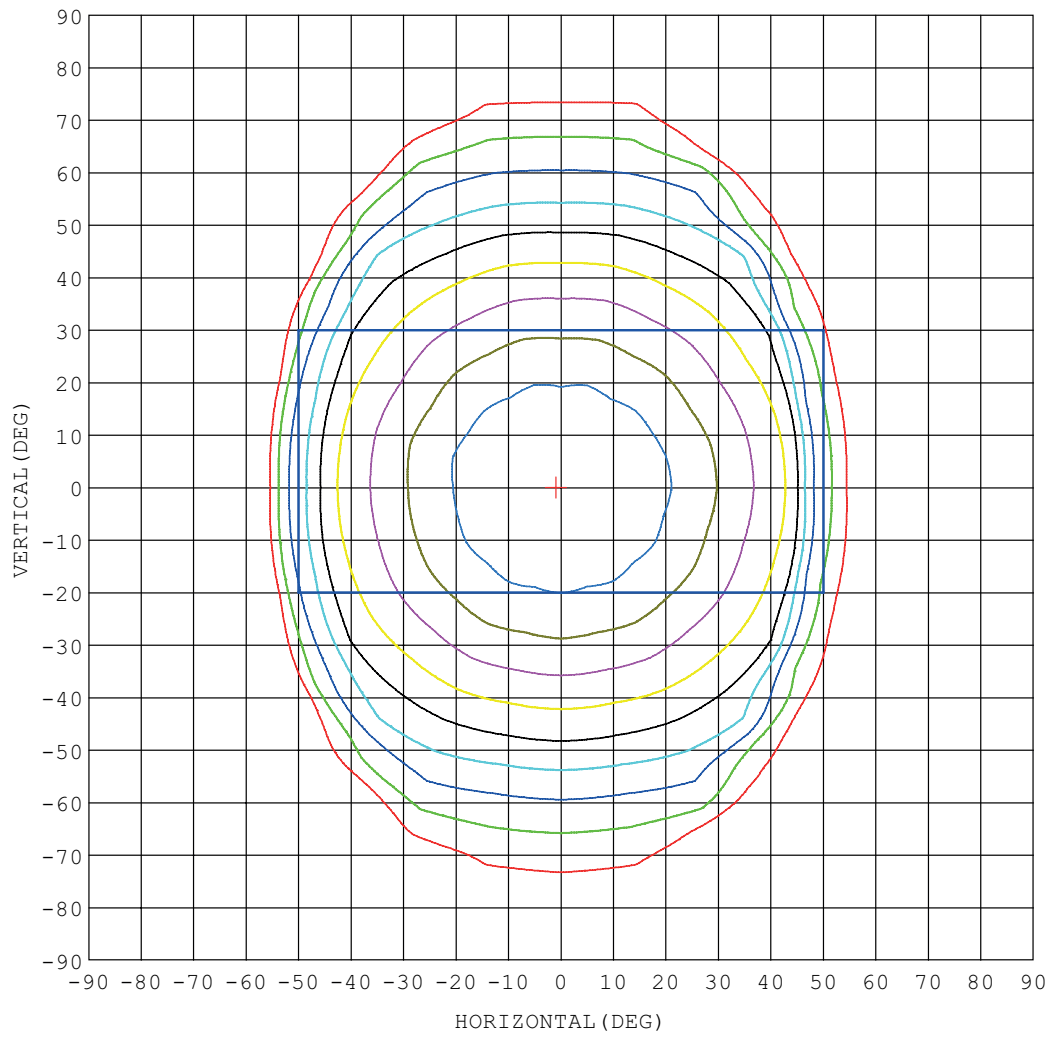


- 10% 1.292
- 20% 2.584
- 30% 3.877
- 40% 5.169
- 50% 6.461
- 60% 7.753
- 70% 9.045
- 80% 10.34
- 90% 11.63

MAX = 12.922
 MIN = 1.4279
 AVG = 9.6392
 AVG/MAX = 0.75
 MIN/MAX = 0.11

I_{max}: 12.92 (H=1.0, V=0.0)
 (At: C=195.0, Gamma=7.0)
 UNIT: cd


AAI FIGURE

Flux out: 18.91 lm

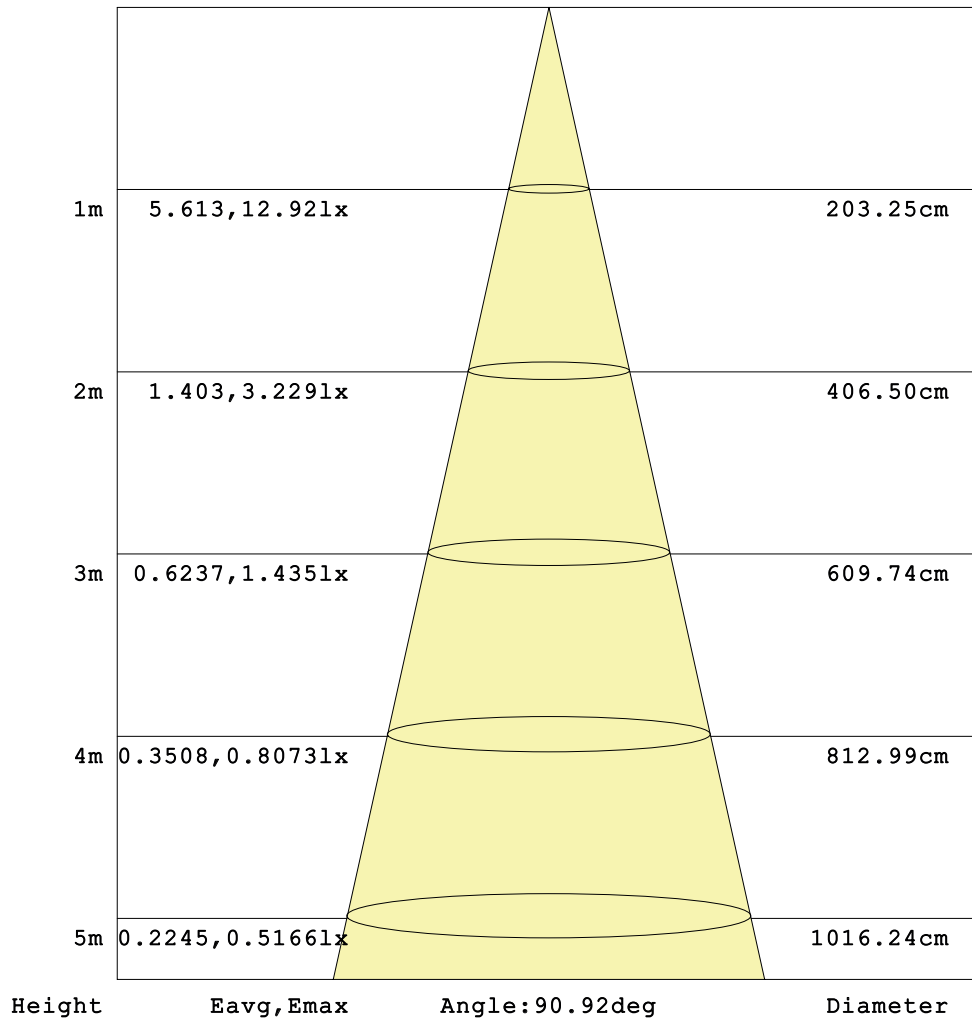

NOTE: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

ISOLUX DIAGRAM

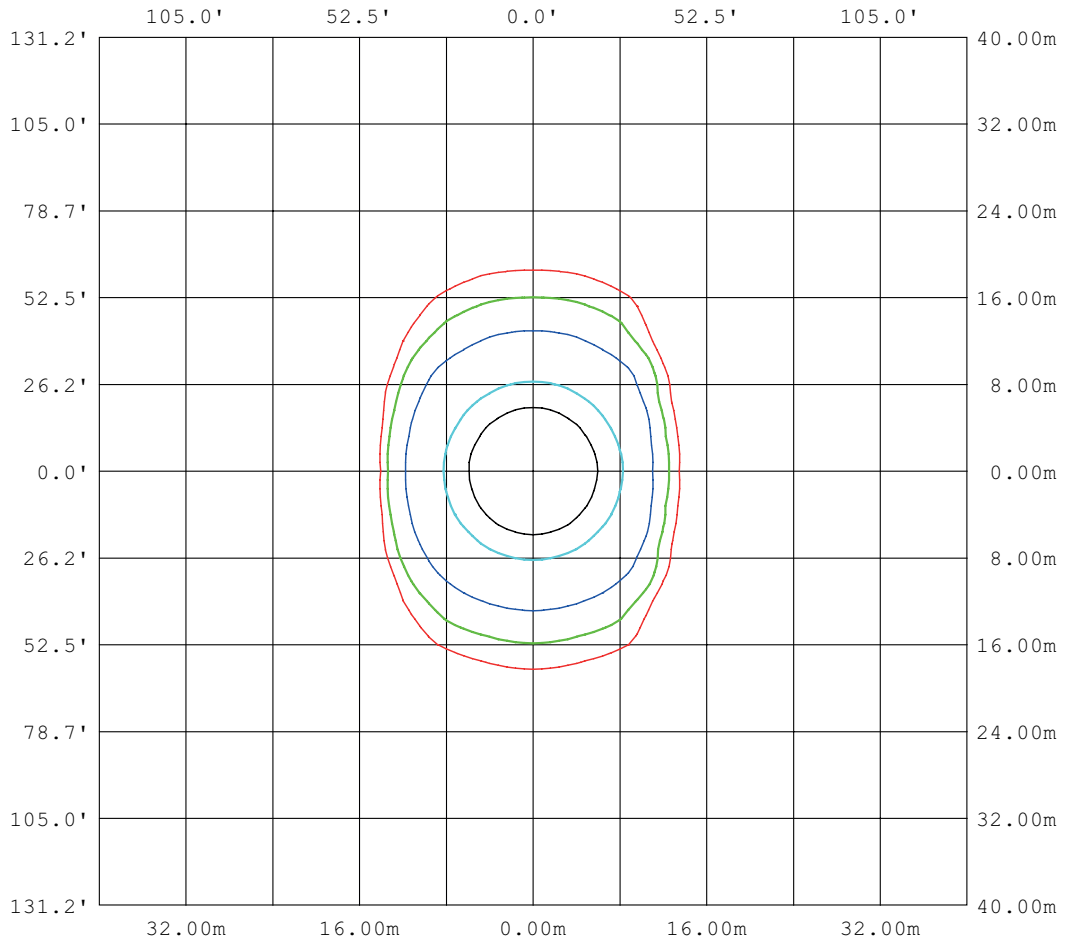

MOUNTING HEIGHT: 33' (10.0m)

- 3% 0.0039lx 0.0003599fc
- 5% 0.0065lx 0.0005998fc
- 10% 0.0129lx 0.0012fc
- 30% 0.0387lx 0.003599fc
- 50% 0.0646lx 0.005998fc

PLANAR ILLUMINANCE CURVE

