


IR-PRE1 IR VOLUME CONTROL

- Convenient stereo volume control of analog audio units with line level
- Suitable for CD players, amplifiers or powered speakers
- IR remote control in compact size
- Volume level up and down
- Mute function on/off
- Stereo RCA input and output
- LEDs for power and mute status
- Operation by using power supply unit

SETUP

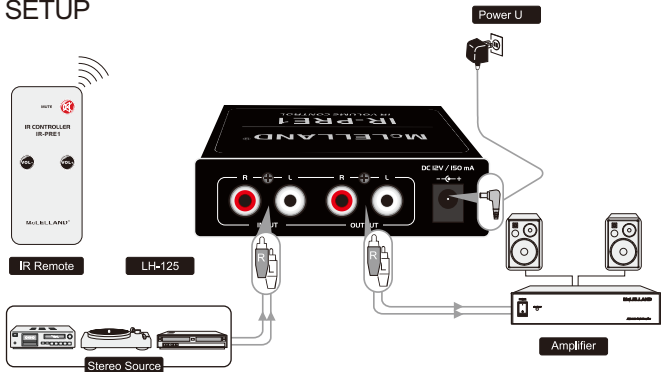

Please turn the power off all the units when the first time to make connections or change any existing connections.

1. Connect the signal source with line level to the RCA input.
2. Connect the RCA output to Amplifier or Active speakers.
3. Connect the power supply to the unit. The POWER Blue LED lights.
4. Press the buttons VOL+ or VOL- to adjust the volume to the desired level.
When operating the remote control, please always direct the remote control toward the unit sensor on the unit's front panel.
5. Press the MUTE button to mute the sound. The MUTE Red LED lights.
red. To recover the sound, please press the MUTE button again.

TECHNICAL SPECIFICATIONS

Power supply:	12 V DC, 150 mA via supplied PSU connected to 230 V~, 50 Hz
Power consumption:	2 W
Connections:	RCA L/R
Max. input level/impedance:	1.65 V /47 k Ω
Max. output level:	2 V
Frequency range:	20 Hz - 20 kHz
S/N ratio:	>90 dB
THD:	0.2 %
Dimensions:	76 x 93 x 26 mm
Weight:	370 g
Battery/remote:	1 x CR 2025