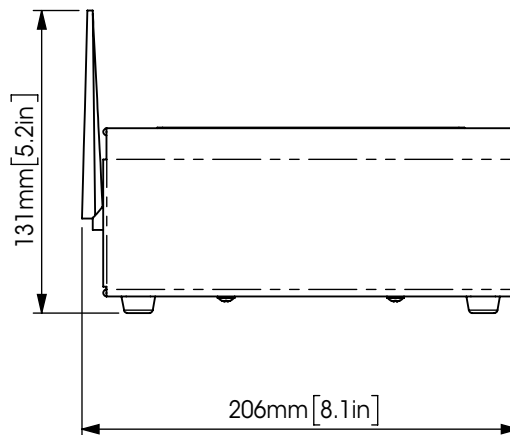
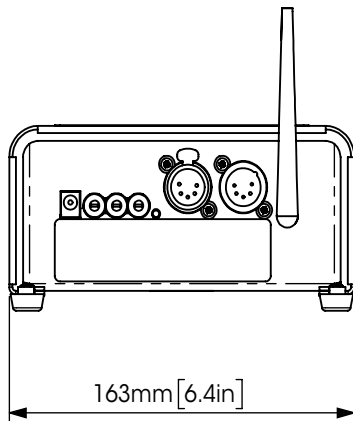
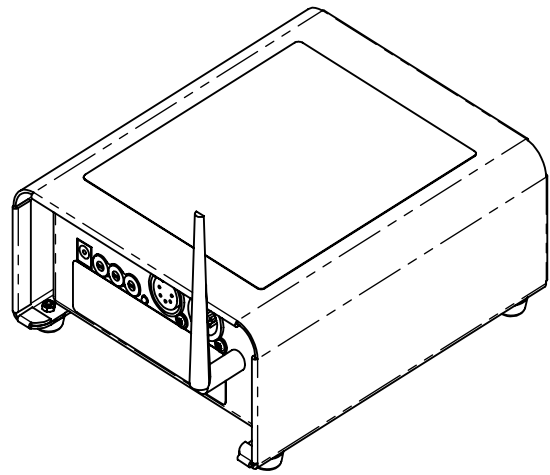
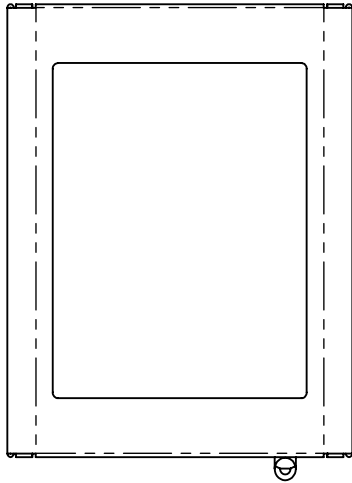

Trio4 Radio Transmitter

The Trio4 Radio Transmitter offers a cable free set up for the Trio4 Music Stand Lights. This is a safe set up as there are no wires and no trip hazard. The system is small and compact and can be easily moved around the venue.

The Radio Transmitter can control an unlimited number of lights, without interference, that are at a maximum unobstructed distance of up to 80 metres.

The transmitter offers zone functionality where the Trio4 Lights can be operated in 6 zones independently from each other.





Detailed Specification

Specifier's description

Nylon coated steel radio transmitter for Trio4 music stand lights. Can control an unlimited number of lights, without interference, that are at a maximum unobstructed distance of up to 80 metres. Has zone functionality where Trio4 Lights can be operated in 6 zones independently from each other.

| Construction | |
|-----------------|-----------------------|
| Casing Material | Steel |
| Coating | 200µm polyester resin |

| Dimensions | |
|------------|---------------|
| Length | 206mm [8.1in] |
| Width | 163mm [6.4in] |
| Height | 131mm [5.2in] |
| Weight | 1kg [2.2lbs] |

| Physical characteristics | |
|---|---|
| Maximum number of lights which can be connected | No limit |
| Low voltage input connector type | DC Power Plug |
| Control modes | DMX Control Test Fixed dimming (10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%) |

| Electrical characteristics | |
|---|--|
| Insulation class | Class 3 |
| Input voltage | 5V DC |
| SELV (Separated Extra Low Voltage) output | YES |
| Frequency of radio transmissions | 868MHz (All of Europe, UAE) 915MHz (North and South America, Australia, NZ, Israel) 920MHZ (Taiwan) <small>*Frequencies are set in the factory dependent on client requirements</small> |

| General | |
|----------------------|-------------------------------------|
| Warranty | 2 years |
| Part number | 41Q11 |
| Applicable standards | EN300220-1, EN 60335-1, EN 301489-1 |
| Markings | CE |