

# CHALLENGER BEAM

## DESCRIPTION

Powerful and budget-friendly Moving BEAM, based on a 200W high power LED!



## FEATURES

- Powerful Moving BEAM, based on a 200W high power LED!
- AURA-effect with 36 pixel-controlled RGB leds, using macros!
- Sharp and powerful 2.8° beam with 110'500 lux @ 5m
- The 2 separate bi-directional rotating prisms can be mixed for stunning effects:
  - 8 facet prism
  - 16 facet prism
- 0-100% dimming and different strobe effects
- Gobo wheel with 13 fixed gobos + open
- Color wheel with 14 colors (including multi color) + open
- DMX controlled focus
- Excellent built-in programs for wonderful, ever changing, light shows
- Multiple working modes:
  - DMX-control: via 5, 23 or 27 channels
  - Standalone: sound activated with internal mic
  - Master/slave:
    - Wonderful synchronized shows in standalone mode
    - Very easy 5CH SMART-DMX (audio-controlled pan/tilt + DMX-controlled functions)
- Prepared for wireless DMX: just plug-in an optional WTR-DMX DONGLE ! (Briteq® order code: B04645)
- Color LCD-display for easy menu navigation
- 3p and 5p XLR connectors for DMX in- and output



## TECHNICAL SPECIFICATIONS

<b>General : Dimensions (cm)</b>	33 x 24.5 x 45.3 (WxDxH)
<b>General : Weight (kg)</b>	14.5
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	285
<b>General : Color</b>	black
<b>General : Display</b>	LCD
<b>General : Fixation</b>	included omega bracket
<b>General : IP rating</b>	indoor
<b>Control : Modes</b>	standalone sound, standalone automatic, DMX, Master/Slave
<b>Control : Protocol</b>	DMX, Wireless DMX
<b>Control : optional remote</b>	WTR-DMX DONGLE
<b>Control : programmable</b>	No
<b>Control : upgradable software</b>	Yes
<b>Control : minimum DMX channels</b>	5
<b>Control : maximum DMX channels</b>	27
<b>Light : lamp socket</b>	No
<b>Light : Lux</b>	110500 (@5m)
<b>Light : lamp</b>	LED
<b>Light : mix colors</b>	No
<b>Light : functions</b>	motorized focus, motorized frost, 8 facet round prism
<b>Light : fixed gobos</b>	13
<b>Light : max. beam angle (°)</b>	3
<b>Light : max. refresh rate (kHz)</b>	No
<b>Connections : input</b>	3 pin XLR, 5 pin XLR, usb, PowerCon® or compatible
<b>Connections : output</b>	3 pin XLR, 5 pin XLR, PowerCon® or compatible
<b>Brand</b>	JB SYSTEMS
<b>EANCode</b>	5420025655705
<b>SKU</b>	B05570

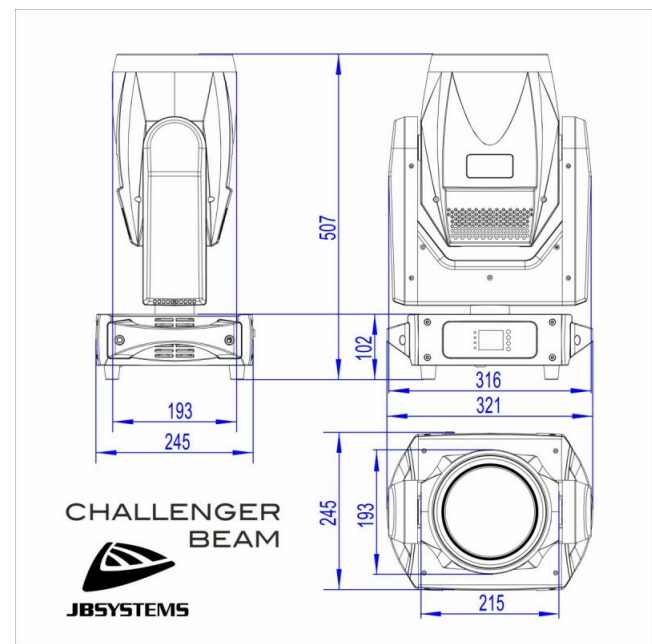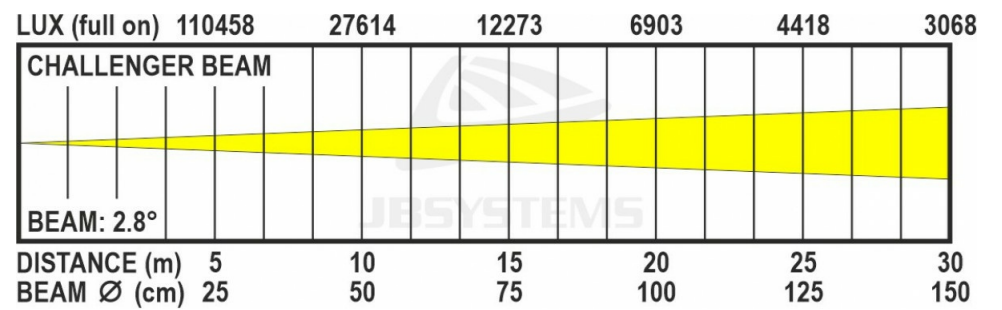

YOUR DEALER

