

BTI-AKKUCHROMA

DESCRIPTION

Compact, powerful, and extremely versatile battery-powered IP65 projector for outdoor use, equipped with 18x 10W RGBL LEDs

IP65
☔

FEATURES




- This powerful battery operated outdoor IP65-projector is equipped with 18pcs 10W RGBL LEDs.
- A real workhorse that can be used for different applications:
 - Powerful battery uplighter: thanks to the heavy-duty bracket, batteries and built-in wireless DMX
 - LED truss-projector: the bracket can be equipped with optional truss clamps and/or omega brackets
- The standard 12° beam (5700lux @ 5m) can be changed using optional filters (1 frost filter included).
- The **wireless transceiver** module (transmitter + receiver) is 100% compatible with the **W-DMX G4 protocol**.
- Very smooth RGBL color changes thanks to high freq. dimming electronics.
- The 12500 mAh Li-ion batteries guarantee +/-10hrs use in fading mode!
- The internal battery charger charges the battery while the projector is working on mains power.
- Different working modes for maximum flexibility:
 - **Standalone:** custom colors, color + CCT presets or automatic color changes
 - **Master/slave mode:** the master controls the slaves wirelessly or via XLR cabling, creating wonderful light shows
 - **DMX-controlled:** wired and wireless (4 modes: 3ch HSV, 4ch RGBL, 4ch LEDCON-02 Mk2 and 8ch STAGE for extended control)
 - **Used as wireless transceiver:** In the absence of a separate W-DMX transceiver, this projector can perfectly be used (mis-used 😊) as a replacement for it!
 - **IR remote control:** simple control using a cheap (optional) remote, even in master/slave mode
- The graphic OLED display shows a lot of important information, such as the remaining time of the battery. Combined with the touch keys, it also provides smooth setup menu operation.
- Completely silent “passive” cooling (NO cooling fans!).
- Seetronic PowerCON TRUE1 compatible mains in- and output for easy daisy chaining.
- Standard weatherproof 3pin and 5pin XLR in- and output connectors for maximum flexibility.
- Can be secured with standard laptop “Anti-theft Cable Lock” (available from different brands).
- An optional 120x60cm flight case is available in which up to 4 projectors can be recharged.

NOTE: this product has IP65 rating while used for non-permanent outdoor installation and under normal conditions (not exposed to seawater).



TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	41 x 18.4 x 26.9
General : Weight (kg)	10.7
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Works on battery	yes
General : Energy Label	No
General : Power consumption W	200
General : Color	black
General : Display	OLED
General : Fixation	optional omega bracket
General : IP rating	outdoor
Control : Modes	standalone fixed, standalone automatic, remote, manual, DMX, Master/Slave
Control : Protocol	DMX, Wireless DMX, RDM
Control : programmable	No
Control : upgradable software	Yes
Control : minimum DMX channels	3
Control : maximum DMX channels	8
Light : lamp socket	No
Light : Lux	5700 @5m (beam 12°)
Light : lamp	LED
Light : min. color temperature (K)	2500
Light : max. color temperature (K)	6000
Light : colors	RGBL
Light : mix colors	Yes
Light : functions	1 frost filter included
Light : min. beam angle (°)	12
Light : max. beam angle (°)	24
Light : max. refresh rate (kHz)	7.2
Connections : input	3 pin XLR, 5 pin XLR, wireless DMX, rdm, PowerCon® TRUE1 or compatible
Connections : output	3 pin XLR, 5 pin XLR, wireless DMX, rdm, PowerCon® TRUE1 or compatible
Brand	BRITEQ
EANCode	5420025651929
SKU	B05192

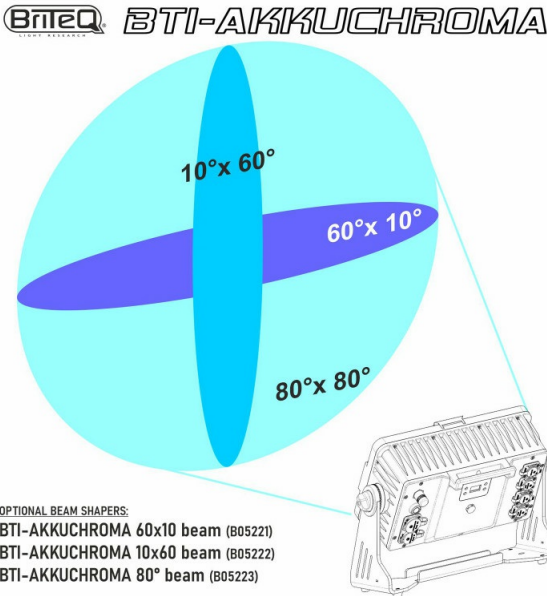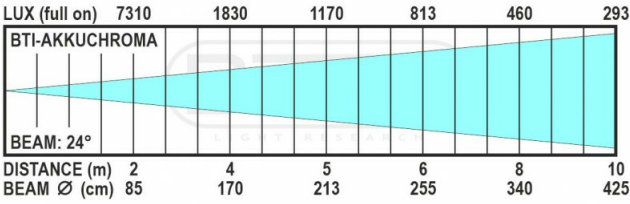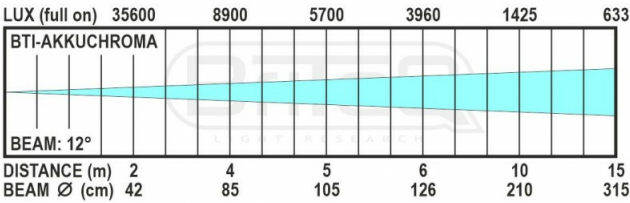

YOUR DEALER

