

AMP200.4

B08131

DESCRIPTION

Professional 4-channel power amplifier in an extremely compact 19" 1U-housing

FEATURES


- Professional 4-channel power amplifier in an extremely compact 19" 1U-housing (H: 44mm)
- The unit houses 2 separate class-D amplifiers that can be configured independently to obtain the following combinations:
 - Both amps in stereo mode: 4x 200Wrms @ 4Ω (4x 100Wrms @ 8Ω)
 - Both amps in mono mode: 4x 200Wrms @ 4Ω (4x 100Wrms @ 8Ω)
 - Both amps in Bridge mode: 2x 400Wrms @ 8Ω
 - 3 Channel mode (2 satellites + sub): 2x 200Wrms @ 4Ω (or 2x 100Wrms @ 8Ω) + 1x 400Wrms @ 8Ω
- 120Hz High Pass Filter on/off switch for satellite speakers
- 120Hz Low Pass Filter on/off switch for subwoofer
- DC fault + high temperature + overload and short circuit protections
- A plastic cover (included) can be installed to prevent access to the level knobs
- Balanced XLR inputs
- Speakon® compatible outputs






TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	48.3 x 4.4 x 24
General : Weight (kg)	4.71
General : Color	black
General : Powerinput	AC 230V, 50Hz
General : Energy Label	No
General : Display	No
General : RU	1U
General : IP rating	indoor
Audio : min. frequency (Hz)	20
Audio : max. frequency (Hz)	20000
Audio : frequency range	120
Audio : S/N ratio (> dB)	100
Audio : max. output channels	4
Audio : Wrms 4Ω stereo, per channel	200
Audio : Wrms 8Ω stereo, per channel	100
Audio : Wrms 8Ω bridge	400
Audio : functions	fixed crossover
Connections : input	3 pin XLR, IEC
Connections : output	speakon
Brand	JB SYSTEMS
EANCode	5420025681315

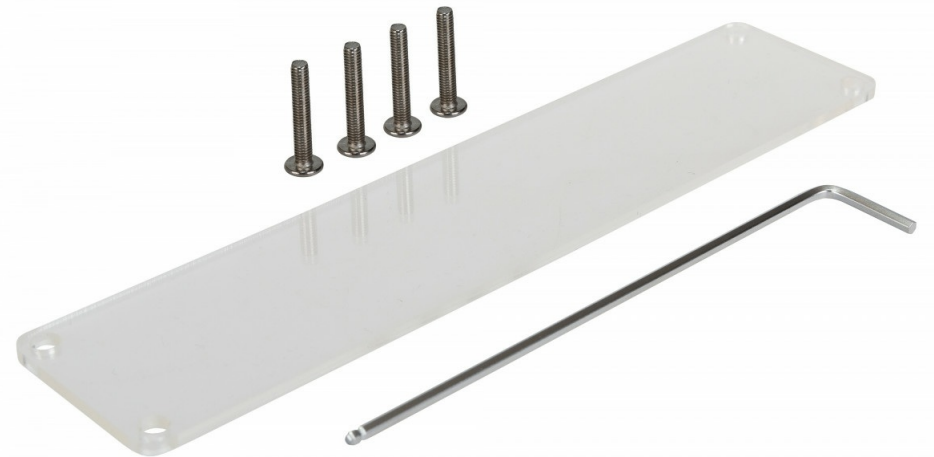

YOUR DEALER

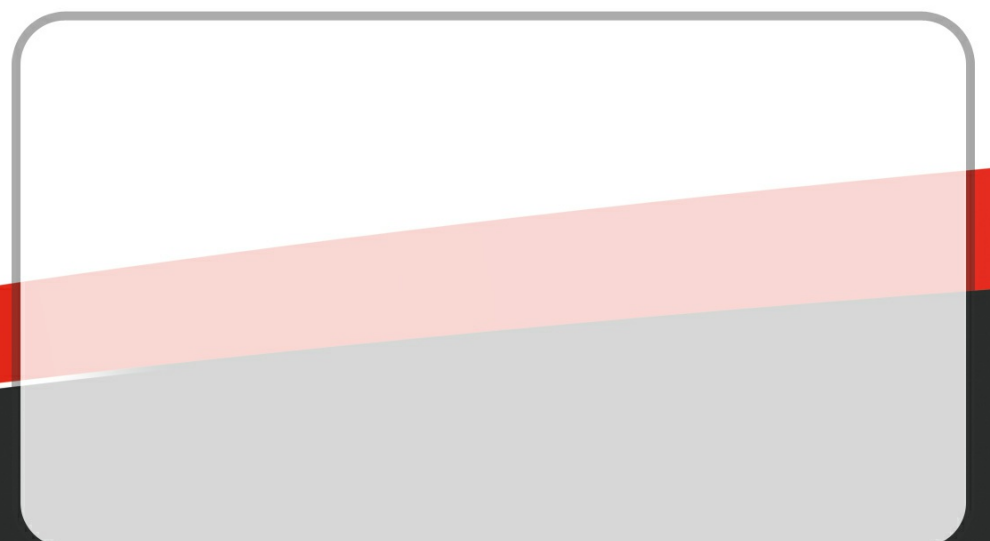

www.jb-systems.eu | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2023 by BEGLEC NV. All rights reserved.

